



INSTALLATION INSTRUCTION

Parameters

Part No.	Input Voltage	Frequency	Power	CCT	Rated Current
WPTWS100CCTBK5	AC120-347V	50/60Hz	60W/80W/100W	3000K/4000K/5000K	0.917A
WPTWS40CCTBK5			20W/30W/40W	3000K/4000K/5000K	0.367A

Installation-Surface Mounting

- Do not remove any part of the fixture.
- Specification please see the label on fixture.
- Specified as following:
 - rated voltage: Min. 600 V;
 - rated connecting capacity: Min. 18AWG;
 - any necessary preparation of the ends of conductors: the length of exposed ends of conductors shall not more than 8mm;
- Please mention the main specification as following before wiring.

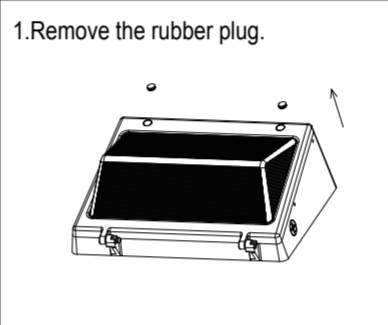
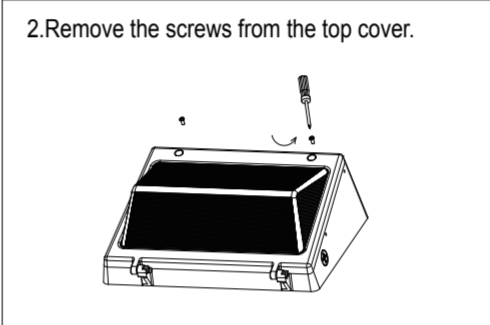
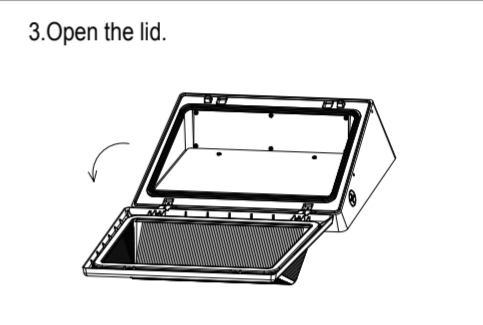
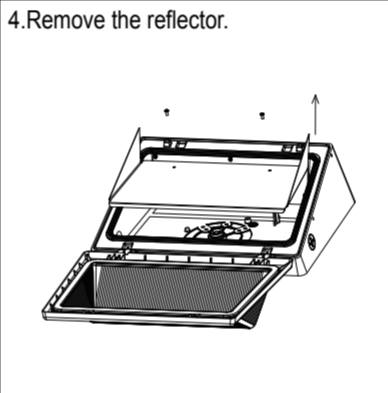
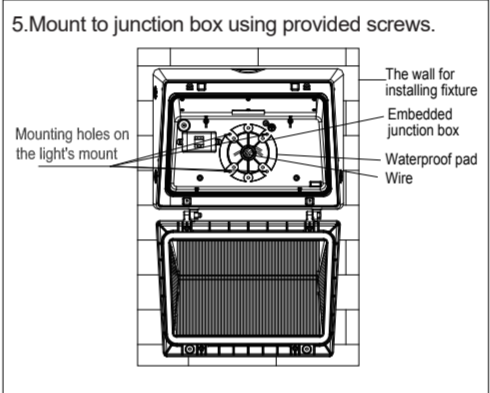
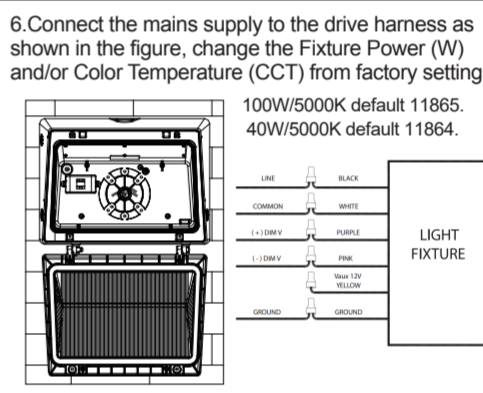
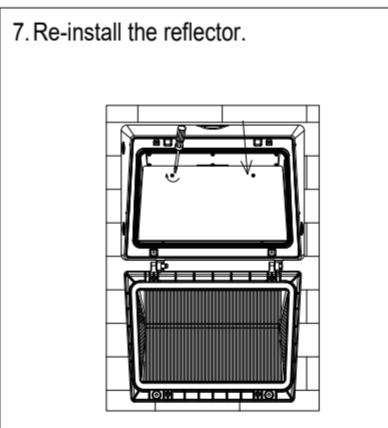
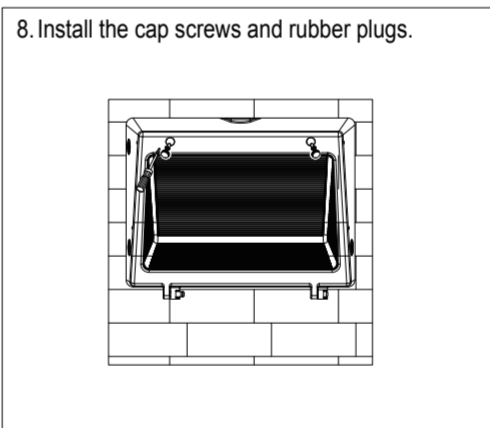
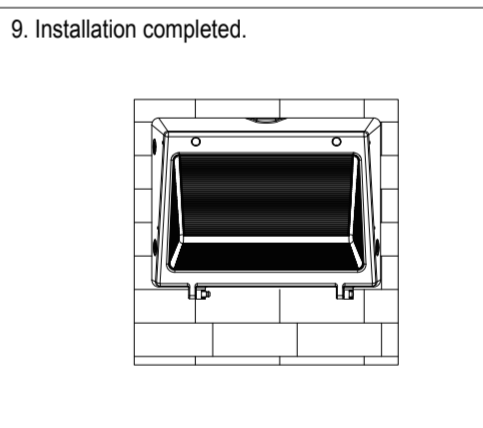
Warning

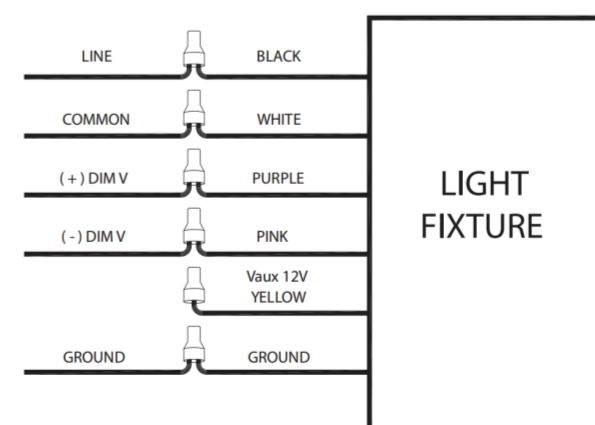
- Before starting use of the light, please check if the light was damaged during transportation. If any damage shown, please do not install or use it.
- The products itself and all its components should not be mechanically stressed.
- Installation must not damage or destroy conducting paths or other parts of the product.
- Installation of LED product (with power supplies) needs to be made with regard to all applicable electrical and safety standards. Only qualified personnel should be allowed to perform installations.
- Correct electrical polarity needs to be observed. Wrong polarity may damage or destroy the LED products.
- If fixing on metallic or otherwise conductive surfaces, there should be an electrical insulator between the product and the mounting surface.
- Damage caused by corrosion will not be honored as a materials defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements.
- Identify Positive (+) and negative (-) outputs of the power supply by using a multimeter.
- Electrical connection should be in a dry area unless adequately sealed.
- This product series emits high light output. DO NOT look directly into the light emitting area. Direct exposure to the light over an extended time period may harm eyes.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person.

- MIN 90°C SUPPLY CONDUCTORS / LES FILS D'ALIMENTATION 90°C MIN
- SUITABLE FOR WET LOCATIONS / CONVIENT AUX EMPLACEMENTS MOUILLÉS
- CAUTION - RISK OF FIRE. CAUTION - RISK OF SHOCK. ATTENTION - RISQUE D'INCENDIE. ATTENTION - RISQUE DE CHOC.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.



Installation Instruction For Wallpack Photoelectric Switch

- Remove the rubber plug.

- Remove the screws from the top cover.

- Open the lid.

- Remove the reflector.

- Mount to junction box using provided screws.

- Connect the mains supply to the drive harness as shown in the figure, change the Fixture Power (W) and/or Color Temperature (CCT) from factory settings:

- Re-install the reflector.

- Install the cap screws and rubber plugs.

- Installation completed.




The Installation must be carried out by a qualified electrician.