


LED Linear Tube

1150 Lumen T8 LED 5000K 24 inch Type A for Electronic Ballast



Electrical

Watt	8.5
Power Factor	> 0.90
Voltage	For use with Instant Start Electronic Ballast
Base Type	G13
Operating Temperature Range	-20°C to 45°C

Light

Initial Lumens	1150
Lumens per Watt	135
Color Temperature	5000K
Color Rendering (CRI)	82
Beam Angle	300°

Agency Approvals

UL	Yes
DLC Listed	Yes
RoHS	Yes
FCC	Yes, FCC 47 Part 18 CLASS A

Product Details

Warranty	10 years, 6 hrs/day
Mercury Content	0
Diameter	1"
Nominal Length	24"
Rated Life	50,000 hours

PRODUCT DESCRIPTION

8.5 watt EarthBulb LED linear tube is available in 5000K with 300 degree beam angle. Great light output and perfect for replacement of T8 fluorescent tubes. This linear tube provides 1150 lumens and has a CRI of 82. This lamp is engineered for high lumen maintenance over its 50,000 hour rated life and exceeds the requirements for DLC. Simply "plug and play" on electronic fluorescent ballasts.

Now compatible with instant start and program start ballast. Also compatible with fluorescent emergency ballasts.

PRODUCT FEATURES


- "Plug and play" on T8 systems utilizing instant start electronic ballast, program start ballast and fluorescent emergency ballast
- Easily retrofit T8, 24 inch tubes
- Provides 1150 lumens
- Chipset provides 5000K daylight with a high color rendering rating of 82
- No Mercury
- RoHS Certified

MODEL NUMBER: LT829850

ORDERING CODE: 10265

DLC PRODUCT ID: PUD4X1N1

PACK SIZE: 25

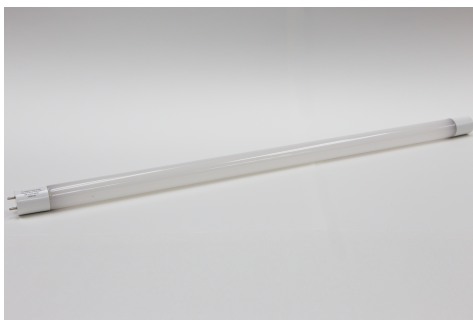

DIMENSIONS:

- Diameter: 1 inch
- Nominal Length: 24 inches