

# LED PAR30

## 800 Lumen 13 Watt 5000K PAR30 - 25° Commercial Pack




### PRODUCT DESCRIPTION

13 watt PAR30 EarthBulb LED floodlight replaces 75 watt incandescent floodlights for over 85% energy savings. Great for use in dimming recessed lighting, track lighting and display lighting applications. High power LED and an advanced cooling system provides for 25,000 hours of LED life. Medium screw base. Suitable for outdoor use, damp location rated.

### PRODUCT FEATURES

- Dimming PAR30 flood light provides 800 lumens, capable of dimming to less than 5%
- 25° beam angle provides a flood, not spot light
- Unique LED array design look like halogen when powered on
- Chipset provides 5000K daylight with a high color rendering rating over 80, 90+ CRI
- Wet rated UL and suitable for exterior locations
- Face of the lamp looks like standard PAR lamps
- Fits track heads like a PAR lamp is intended

### PRODUCT APPLICATIONS

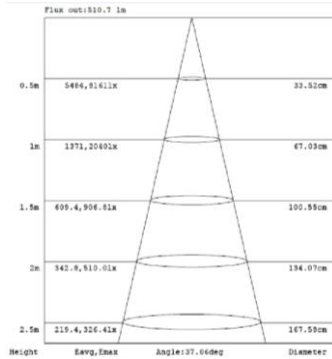


### LUMINOUS DISTRIBUTION INTENSITY DATA

Intensity (Candlepower) Summary at 25°C - Candelas

| V \ H(°) | 0     | 22.5  | 45    | 67.5  | 90    |
|----------|-------|-------|-------|-------|-------|
| 0        | 1947  | 1947  | 1947  | 1947  | 1947  |
| 5        | 1904  | 1887  | 1875  | 1863  | 1852  |
| 10       | 1712  | 1683  | 1655  | 1632  | 1604  |
| 15       | 1354  | 1310  | 1279  | 1251  | 1209  |
| 20       | 903.8 | 858.4 | 840.9 | 820.3 | 779.2 |
| 25       | 515.6 | 484.1 | 477.4 | 466.8 | 440.8 |
| 30       | 265.4 | 249.6 | 250.3 | 248.9 | 241.3 |
| 35       | 137.8 | 131.7 | 133.2 | 135.4 | 131.2 |
| 40       | 79.9  | 76.9  | 77.8  | 79.8  | 78.2  |
| 45       | 53.0  | 51.6  | 52.2  | 52.9  | 52.1  |
| 50       | 39.2  | 38.5  | 38.8  | 38.7  | 38.0  |
| 55       | 30.7  | 30.1  | 30.2  | 30.0  | 29.4  |
| 60       | 24.4  | 23.9  | 23.9  | 23.5  | 23.2  |
| 65       | 19.2  | 18.7  | 18.6  | 18.2  | 17.8  |
| 70       | 14.5  | 14.1  | 14.1  | 13.6  | 13.2  |
| 75       | 10.6  | 10.2  | 10.1  | 9.7   | 9.4   |
| 80       | 7.2   | 6.9   | 6.7   | 6.5   | 6.2   |
| 85       | 4.7   | 4.4   | 4.3   | 4.1   | 3.8   |
| 90       | 2.7   | 2.5   | 2.3   | 2.2   | 2.0   |


### LUMINOUS DISTRIBUTION INTENSITY DIAGRAM

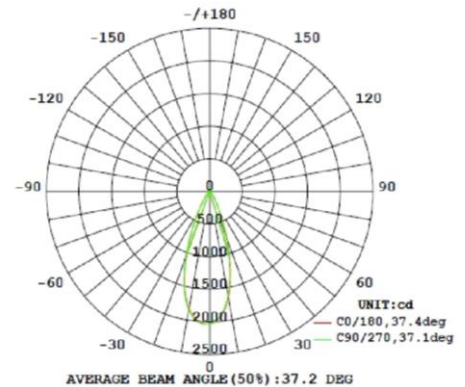

### MODEL NUMBER: LP31350D625

### ORDER CODE: 10675

| Order Code   | Individual UPC     | Master Park UPC      | Qty |
|--|--------------------|----------------------|-----|
| 10675  | 840791106754       | 84079110675400       | 12  |
| <b>Dimensions (inches - Length x Width x Height)</b> |                    |                      |     |
| 10675  | 3.93 x 3.93 x 5.08 | 16.61 x 12.55 x 6.14 | 12  |
| <b>Weight (lbs)</b>                                  |                    |                      |     |
| 10675  | .449               | 6.622                | 12  |



| Electrical                  |                      |
|-----------------------------|----------------------|
| Watt                        | 13                   |
| Power Factor                | > 0.9                |
| Voltage                     | 120 volt             |
| Frequency                   | 60Hz                 |
| Base Type                   | E26 Medium           |
| Operating Temperature Range | -4F to 104F          |
| Light                       |                      |
| Initial Lumens              | 800                  |
| Lumens per Watt             | 62                   |
| Color Temperature           | 5000K                |
| Color Rendering (CRI)       | 93                   |
| Beam Angle                  | 25°                  |
| Agency Approvals            |                      |
| UL                          | Yes                  |
| Energy Star                 | 25,000 hours         |
| RoHS                        | Yes                  |
| FCC                         | Yes                  |
| Product Details             |                      |
| Warranty                    | 10 years<br>6 hr/day |
| Diameter                    | 3.63"                |
| Nominal Length              | 4.59"                |

