

Project	
Date	
Prepared By	
Model #	WPA50WSCCTBK5

Specifications

ELECTRICAL:

Watts: 30W/40W/50W

Voltage: 120-347VAC

Power Factor: >0.9

Operating Temp. Range:

-40°C (-4°F) to 45°C (113°F)

LIGHT:

Lumens: 3900, 5200, 6500LM

Color Temperature: 3000K,
4000K, 5000K

CRI: 80+

Dimming: 0-10VDC

AGENCY APPROVALS:

DLC® Premium: Yes

UL: Yes

IP65: Yes

PRODUCT DETAILS

Finish Color: Bronze

Lens Material:

Polycarbonate, Anti-UV

Warranty: 5 years

Weight: 4.74 LBS

Dimensions:

7.58" L x 5.45" W x 4.86" D



Norton Shores, Michigan 49441
T: 231.332.1188 | F: 231.726.5029
TOLL FREE: 866.632.7840
www.earthtronics.com

LED Adjustable Slim Wall Pack

Color & Wattage Selectable



120/347VAC



Watt
Selectable



Color
Selectable



Dimmable



ORDER CODE:
11627

MODEL NUMBER:
WPA50WSCCTBK5

COLOR TEMPERATURE:
3000K, 4000K, 5000K

WATTAGE SELECTABLE
30W/40W/50W

DLC® PRODUCT ID:
PLHLROZKI6V4

REBATE AVAILABILITY*

PRODUCT DESCRIPTION

The EarthTronics LED Adjustable Wall Pack has a slim profile design. It can be locked into any angle ranging from 0° to 90° providing exterior security illumination where required. The durable die cast aluminum housing is powder coated to maintain the fixture appearance for several years. Select from 3000K, 4000K or 5000K color temperatures as well as 3900, 5200 or 6500 lumen levels, this is easily done by the dial switch located on the side of the product. It features a high 80+ CRI providing an excellent light source for nearly any task. The polycarbonate lens provides durability and resistance impact, and the conduit entry points allow direct wall or junction box mounting. These adjustable wall pack fixtures feature 120-277V universal voltage. This fixture can withstand the elements, it's made to last in the outdoors with the IP65 rating and a minimum start temperature of -40°F. They are equipped with a 0 - 10 volt continuous dimming driver with a dimming range capability of 10% to 100%. The long 50,000-hour life is backup with a 10 year limited warranty. Photocell for dusk to dawn operation is installed in this fixture. The wall pack fixture requires a properly anchored UL recognized junction box for proper installation. Night Sky Complaint. DLC® listed product.

PRODUCT FEATURES

- + Color Selectable: 3000K, 4000K, 5000K
- + Wattage selectable: 30, 40, 50
- + Universal Voltage 120-347VAC
- + Adjustable 0-90°
- + Durable die cast aluminum housing
- + 0-10V continuous dimming driver
- + Photocell for dusk to dawn operation
- + Dimming range of 10% to 100%
- + Sealed to and tested for IP65
- + Factory preset to maximum wattage, 5000K
- + Night Sky Complaint
- + DLC® Technical Requirement 5.1

APPLICATIONS

- + Building Exteriors
- + Walls
- + Corridor Lighting
- + New Construction Buildings
- + Parking Areas

Please consult installation instructions for proper application and use of this fixture.

*Rebate availability access it here: www.earthtronics.com/rebate-finder

PACKAGE DETAILS




INDIVIDUAL PACKAGE

Individual Package: 4
 Fixture Dimensions:
 20.47" L x 12.20" D x 12.99" W
 Weight: 21.61 LBS
 UPC: 84079111627200


MASTER CARTON

Individual Package: 1
 Fixture Dimensions:
 9.84" L x 5.70" D x 12.20" W
 Weight: 5.40 LBS
 UPC: 840791116272

PRODUCT DIMENSIONS

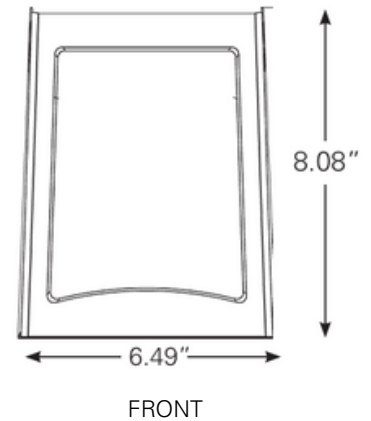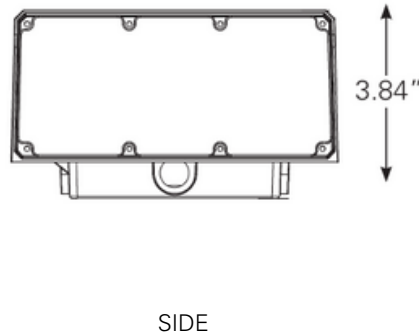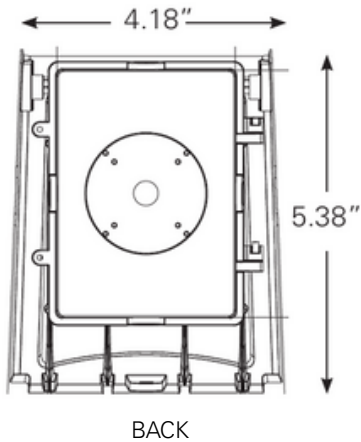

PRODUCT DIMENSIONS

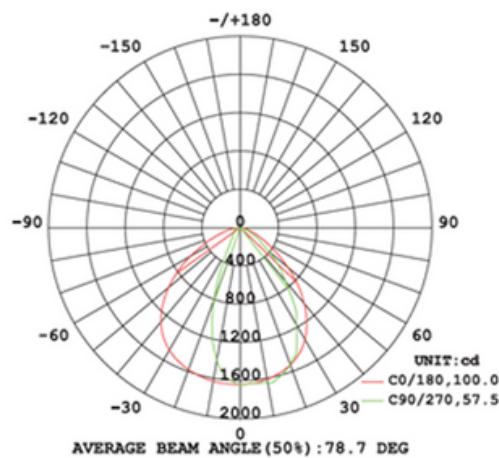

Easily access our DLC qualified products with rebates in your area.

ACCESS IT HERE: [Rebate Finder - LED Adjustable Wall Pack](http://www.earthtronics.com/rebate-finder/catalog/)

www.earthtronics.com/rebate-finder/catalog/