LED Mini Wall Pack
Color & Wattage Selectable with Emergency Backup

Specifications

ELECTRICAL:

Watts: 15W/20W/25W

Voltage: 100-277VAC

Power Factor: >0.9

Operating Temp. Range:
-40°C (-4°F) to 45°C (113°F)

LIGHT:

Lumens:
2025,2700,3375LM

Lumen Per Watt (LPW): 135

Color Temperature:
3000K, 4000K, 5000K

CRI: 80

Dimming: Yes

Beam Angle: 90° X 140°

AGENCY APPROVALS:

DLC® Premium: Yes

UL: Yes

PRODUCT DETAILS

Finish Color: Bronze

Mounting: Bracket Fixed

Warranty: 5 years

Weight: 2.5 LBS

Dimensions:
8.7"L x 5.79"W x 3.09"D

EarthTronics®

Norton Shores, Michigan 49441
T: 231.332.1188 | F: 231.726.5029
TOLL FREE: 866.632.7840
www.earthtronics.com

ORDER CODE:
11835

MODEL NUMBER:
LWPMWS25CCTBK1EM

COLOR TEMPERATURE:
3000K, 4000K, 5000K

WATTAGE SELECTABLE
15W/20W/25W

DLC® PRODUCT ID:
S-VNX80D

120/277VAC · Wet Location Rated · Watt Selectable · Color Selectable · Dimmable · DLC LISTED PREMIUM

PRODUCT DESCRIPTION

The EarthTronics LED Mini Wall Pack with Emergency Backup offers wide-flood exterior illumination, ideal for commercial, industrial, and municipal facilities. Its built-in emergency backup ensures reliable lighting during power outages, ensuring safety and security even in unexpected situations. This durable, energy-efficient solution is perfect for maintaining welllit areas in all conditions. The durable UV-stabilized polycarbonate lens resists corrosion and environmental conditions. Select from 3000K, 4000K or 5000K color temperatures as well as 2025,2700, or 3375 lumen level. This wall pack operates at 135 lumens per watt efficiency at all lumens levels and a CRI of 80. Accepts 100 – 277-volt AC power supply. The long 50,000 hour rated life is backed up with a 5-year limited warranty. DLC® Premium.

PRODUCT FEATURES

+ Color Selectable: 3000K, 4000K, 5000K
+ Night sky compliant
+ Dimmable
+ Durable die-cast aluminim housing
+ Photocell installed
+ IP65 rated for wet locations
+ 3000K for reduce sky-glow
+ DLC® Premium

APPLICATIONS

+ Alleys
+ Loading Docks
+ Doorways
+ Pathways

Please consult installation instructions for proper application and use of this fixture.

LED Mini Wall Pack
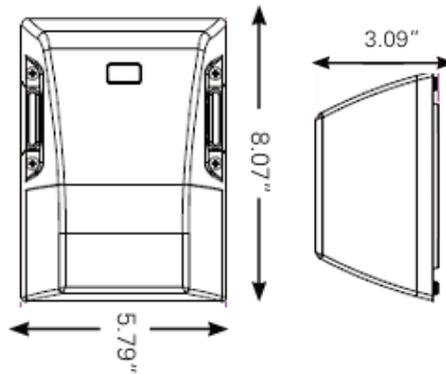
Color & Wattage Selectable with Emergency Backup

PACKAGE DETAILS

INDIVIDUAL PACKAGE

Individual Package: 1
Fixture Dimensions:
8.3″ L x 6.0″ W x 3.4″ D
Weight: 2.5 LBS
UPC: 8 40791118351

MASTER CARTON

Individual Package: 20
Fixture Dimensions:
17.33″ L x 12.6″ W x 18.11″ H
Weight: 51.1 LBS
UPC: 8 4079111835100

PRODUCT DIMENSIONS

LIGHT DISTRIBUTION CURVE

UNIT:cd
C0/180,141.0
C90/270,84.7

EarthTronics, Inc. | Norton Shores, MI 49441 | www.earthtronics.com | Email: contact@earthtronics.com Toll Free: 866.632.7840

REV. 2.19.26| ET11835