

Project	
Date	
Prepared By	
Model#	LT8WS8CCTDES

## Specifications

### ELECTRICAL

Watts: 24/32/40W  
 Voltage: 120-277V  
 Power Factor: 0.873  
 Operating Temp. Range:  
 -4°F (-20°C) to 113°F (45°C)  
 Base Type: FA8 or R17D  
 Dimming Type: 0-10V  
 Continuous Dimming  
 Beam Angle: 220°

### LIGHT

Initial Lumens:  
 3500/4400/5500  
 Lumens per Watt: 148/137  
 Color Temperature: 3000K,  
 3500K, 4000K, 5000K,  
 6500K  
 CRI:82


### AGENCY APPROVALS

DLC®: Yes  
 UL1993 & UL 1598C  
 FCC: Yes, Part 15 class B  
 RoHS: Yes  
 NSF: Yes

### PRODUCT DETAILS

Enclosure Material: Glass  
 Endcap Material: Plastic  
 Lens Finish: Frosted  
 Fixture Rated Life: 50,000  
 Hours  
 Warranty: 5 years

## Type B 8ft - Double End Interchangeable Base | FA8 or R17D Field Adjustable Power & Color Temperature

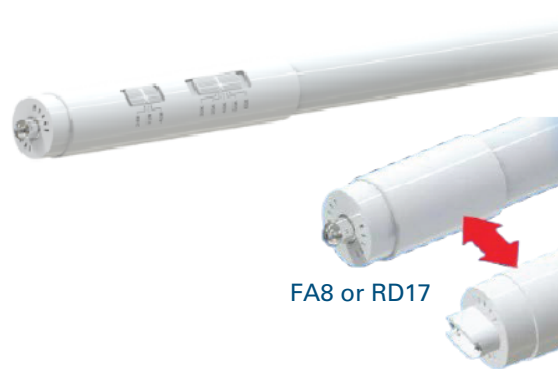

FA8 or RD17



**ORDER CODE:** 11862

**MODEL NUMBER:**  
 LT8WS8CCTDES

**WATTS:** 24/32/40

**COLOR TEMPERATURE:**  
 3000K, 3500K, 4000K, 5000K,  
 or 6500K

**LUMENS:** 3500/4400/5500

**DLC®:** S-5XKPML  
 REBATE AVAILABILITY\*

### PRODUCT DESCRIPTION

EarthTronics interchangeable base T8 LED lamp is a direct replacement for T8 and T12 linear tubes. This lamp is setup for double-end direct wire method. This Type B lamp can be directly wired quickly, and no lamp holder modifications are necessary. This lamp is color selectable, offering 5 choices 3000K, 3500K, 4000K, 5000K or 6500K which can be adjusted in the field by just sliding the switch to your desired color. The flexible design offers interchangeable base type of FA8 or R17D as well as lumen options 3500, 4400, or 5500. It provides exceptional LED lighting with reduced energy and maintenance costs. This lamp also works with shunted and non-shunted sockets, dry or damp locations and enclosed fixtures. The beam angle provides a wide distribution pattern and is perfect for directing more light to the working surface from existing troffer fixtures and strip fixtures as well as task and display lighting applications. Shatterproof coated to conform to the Food Safety standards. This lamp is engineered for high lumen maintenance over its 50,000 hour rated. 120/277V operation. DLC® listed.

### PRODUCT FEATURES


- + Easily retrofit T8, 8 foot tubes
- + 5 CCT - Color Selectable, Wattage Selectable
- + Interchangeable base type, FA8 or R17D
- + Double-end operation on 120-277V
- + Type B: Direct wire without modifying lamp holders
- + Emergency backup driver available
- + Provides up to 5500 lumens
- + Shatterproof coated to conform to the Food Safety standards
- + Suitable for open fixtures
- + Suitable for dry or damp locations
- + Conforms to UL Standard 1993 and 1598C. Certified to CSA Standard C22.2 No. 1993 & C22.2 No. 250.1
- + DLC® listed




# Type B 8ft - Double End Interchangeable Base | FA8 or R17D

Field Adjustable Power & Color Temperature

## PRODUCT DIMENSIONS

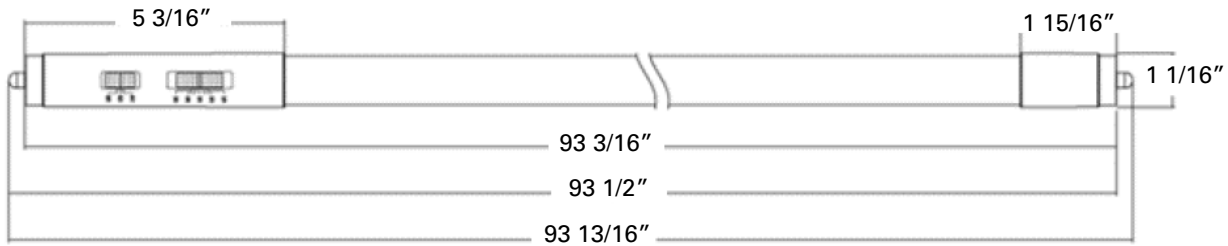

## FIELD ADJUSTABLE

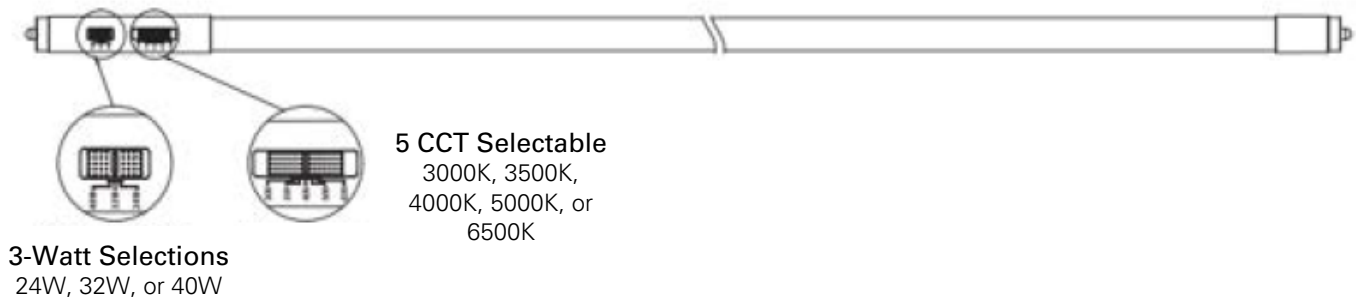

## INTERCHANGEABLE BASES



Easily access our DLC qualified products with rebates in your area.

ACCESS IT HERE: [Rebate Finder - TLED](#)

[www.earthtronics.com/rebate-finder/catalog/](http://www.earthtronics.com/rebate-finder/catalog/)

