

Project	
Date	
Prepared By	
Model #	LT8WS8CCTDES

Specifications

ELECTRICAL

Watts: 24W, 32W or 40W

Voltage: 120-277V

Power Factor: 0.873

OperatingTemp. Range:
-4°F (-20°C) to 113°F (45°C)

BaseType: FA8 or R17D

Dimming Type:

0-10V Continuous Dimming

Beam Angle: 220°

LIGHT

Lumens: 3500, 4400, or 5500

Lumens per Watt:

148 or 137

ColorTemperature:

Field Adjustable 3000K,
3500K, 4000K, 5000K or
6500K

CRI: 82

AGENCY APPROVALS

UL1993 & UL1598C

FCC: Yes, Part 15 class B

RoHS: Yes

DLC®: Yes

NSF: Yes

PRODUCT DETAILS

Enclosure Material: Glass

Endcap Material: Plastic

Lens Finish: Frosted

Warranty: 5 years

Rated Hours: 50,000



Norton Shores, Michigan 49441
T: 231.332.1188 | F: 231.726.5029
TOLL FREE: 866.632.7840
www.earthtronics.com

Type B 8ft - Double End Interchangeable Base | FA8 or R17D

Field adjustable power & color temperature



FA8
or RD17

ORDER CODE:

11862

MODEL NUMBER:

LT8WS8CCTDES

WATTS

24W

32W

40W

LUMENS

3500

4400

5500

COLOR SELECTABLE:

3000K, 3500K, 4000K,

5000K or 6500K

PRODUCT DESCRIPTION

EarthTronics interchangeable base T8 LED lamp is a direct replacement for T8 and T12 linear tubes. This lamp is setup for double-end direct wire method. This Type B lamp can be directly wired quickly, and no lamp holder modifications are necessary. This lamp is color selectable, offering 5 choices 3000K, 3500K, 4000K, 5000K or 6500K which can be adjusted in the field by just sliding the switch to your desired color. The flexible design offers interchangeable base type of FA8 or R17D as well as lumen options 3500, 4400, or 5500. It provides exceptional LED lighting with reduced energy and maintenance costs. This lamp also works with shunted and non-shunted sockets, dry or damp locations and enclosed fixtures. The beam angle provides a wide distribution pattern and is perfect for directing more light to the working surface from existing troffer fixtures and strip fixtures as well as task and display lighting applications. Shatterproof coated to conform to the Food Safety standards. This lamp is engineered for high lumen maintenance over its 50,000 hour rated. 120/277V operation. DLC® listed.


PRODUCT FEATURES

- + Easily retrofit T8, 8 foot tubes
- + 5 CCT - Color Selectable
- + 3 Wattage Selectable
- + Interchangeable base type, FA8 or R17D
- + Double-end operation on 120-277V
- + Type B: Direct wire without modifying lamp holders
- + DLC® listed
- + Provides up to 5500 lumens
- + Shatterproof coated to conform to the Food Safety standards
- + Suitable for open fixtures
- + Suitable for dry or damp locations
- + Conforms to UL Standard 1993 and 1598C. Certified to CSA Standard C22.2 No. 1993 & C22.2 No. 250.1
- + Emergency backup driver available


INTERCHANGEABLE BASES



PRODUCT DIMENSIONS

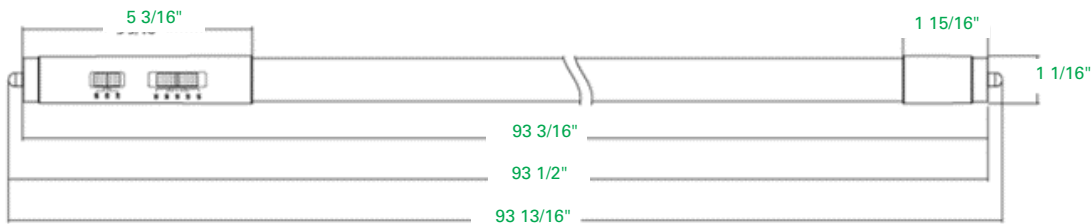

FIELD ADJUSTABLE

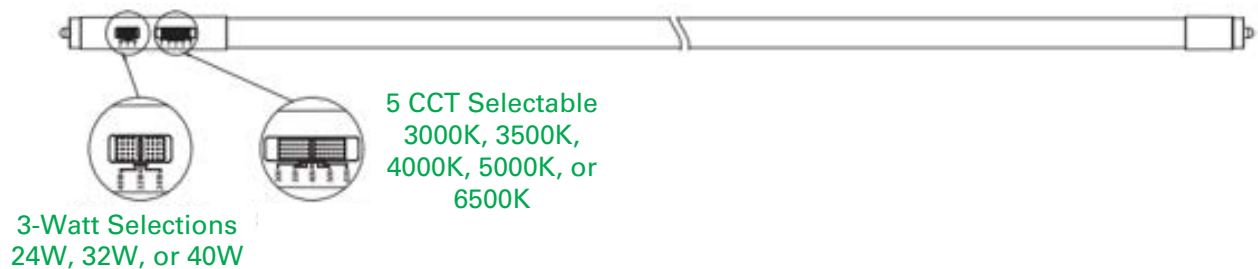

Easily access our DLC qualified products with rebates in your area.

ACCESS IT HERE: [Rebate Finder - TLED](#)

www.earthtronics.com/rebate-finder/catalog/