

|             |                |
|-------------|----------------|
| Project     |                |
| Date        |                |
| Prepared By |                |
| Model #     | HBU150WSCCTB1S |

## Specifications

### ELECTRICAL

Watts: 100, 125, 150  
 Voltage: 120/277V  
 Power Factor:  $\geq 0.9$   
 THD:  $\leq 20\%$   
 Operating Temp. Range:  
 -40°C (-40°F) to 50°C (122°F)

### LIGHT

Highest Lumens: 24000  
 Lumens per Watt: 160  
 Color Temperature:  
 4000K & 5000K  
 CRI: 83  
 Dimming: 0-10V

### AGENCY APPROVALS


UL/cUL: Yes  
 IP65: Yes  
 ETL Sanitation: Listed to  
 NSF STD. 2  
 DLC® Premium: Yes

### PRODUCT DETAILS

**Housing:**  
 Die-cast Aluminum Alloy  
**Warranty:** 5 years  
**Fixture Warranty Life:**  
 50,000 hours  
**Weight:** 3.56 lbs  
**Dimensions:**  
 7.1" Height, 10.4" Diameter

# UFO LED Highbay

## Color & Wattage Selectable



## PRODUCT DESCRIPTION

EarthTronics LED Highbay delivers excellent energy savings then replacing up to a 1000 watt HID fixtures. This UFO high bay fixture has a 10.4" diameter design and produces up to 24000 lumens. It features color selection options of 4000K or 5000K with a high 80+ CRI providing excellent visual acuity for accuracy when working in manufacturing and warehousing applications. This fixture has a unique open center ventilated LED array afford excellent heat dissipation providing high lumen maintenance over its service life. This UFO Highbay is IP65 rated for wet locations and the housing is corrosion resistant die-cast aluminum. This fixture is also ETL Sanitation Listed (conforms to NSF STD.2) for use in food processing and other clean room applications. 0-10V dimming standard and compatible with several controls. High quality LED chips provide for excellent lumen maintenance. This UFO High Bay ships with a standard 6' 18/3 SJT whip, 0-10v dimming wires and mounting hooks. DLC® Premium.

## PRODUCT FEATURES

- + 120/277V
- + Feature 2-stage color temperature adjustment, 3-stage brightness adjustment
- + Operating at 160 lumens per watt
- + ETL Sanitation Listed (conforms to NSF STD.2)
- + DLC® Premium
- + Ships with standard 6' 18/3 SJT whip, 1-10v dimming wires and mounting hooks
- + IP65 wet location rated
- + Polycarbonate lens
- + Corrosion resistant die-cast aluminum housing
- + Driver standard with 0-10V dimming (prewired)

Please consult installation instructions for proper application and use of this fixture.

## ORDER CODE:

11887

## MODEL NUMBER:

HBU150WSCCTB1S

## COLOR SELECTABLE:

4000K or 5000K


## LUMEN LEVELS:

16000 lumens - 100 watts  
 20000 lumens - 125 watts  
 24000 lumens - 150 watts

## DLC® PRODUCT ID:

S-GYZMB6

## PRODUCT DIMENSIONS

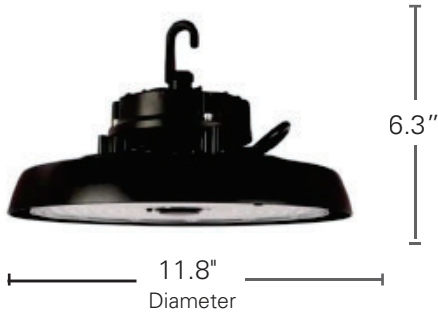

## PACKAGE DETAILS

Dimensions: 12.01" x 12.01" x 6.89"  
 Weight: 6.06 lbs  
 UPC: 840791118870

## COLOR & WATTAGE SELECTION OPTIONS

Step 1:  
Remove the rubber pad from the driver




Step 2:  
Use the slide switch to select wattage and color temperature




Step 3:  
Attach the rubber pad to the driver




## OPTIONAL ACCESSORIES



Trunion Mount Order Code: 11793




Wire Guard Order Code: 11797



12VDC Microwave Sensor  
Order Code: 11795

\*Remote Control Order Code: 11796



PC Reflector  
Order Code: 11791



Emergency Battery Pack  
Order Code: 11834

\* **Note:** One remote control (11796) for multiple microwave sensors.

