

Project	
Date	
Prepared By	
Model #	HBU240WSCCTW1S

## Specifications

### ELECTRICAL

**Watts:** 150, 200, 240  
**Voltage:** 120/277V  
**Power Factor:**  $\geq 0.9$   
**THD:**  $\leq 20\%$   
**Operating Temp. Range:**  
 -40°C (-40°F) to 50°C (122°F)

### LIGHT

**Highest Lumens:** 38400  
**Lumens per Watt:** 160  
**Color Temperature:** 4000K  
 & 5000K  
**CRI:** 83  
**Dimming:** 0-10V

### AGENCY APPROVALS

**UL/cUL:** Yes  
**IP65:** Yes  
**ETL Sanitation:** Listed to NSF STD. 2  
**DLC® Premium:** Yes

### PRODUCT DETAILS

**Housing:**  
 Die-cast Aluminum Alloy  
**Warranty:** 5 years  
**Fixture Warranty Life:**  
 50,000 hours  
**Weight:** 5.51 lbs  
**Dimensions:**  
 7.3" Height, 12.8" Diameter

# UFO LED Highbay

## Color & Wattage Selectable



**ORDER CODE:**  
 11890

**MODEL NUMBER:**  
 HBU240WSCCTW1S

**COLOR SELECTABLE:**  
 4000K or 5000K

**LUMEN LEVELS:**  
 24000 lumens - 150 watts  
 32000 lumens - 200 watts  
 38400 lumens - 240 watts

**DLC® PRODUCT ID:**  
 S-F9RXNB

## PRODUCT DESCRIPTION

EarthTronics LED Highbay delivers excellent energy savings then replacing up to a 1000 watt HID fixtures. This UFO high bay fixture has a 128" diameter design and produces up to 38400 lumens. It features color selection options of 4000K or 5000K with a high 80+ CRI providing excellent visual acuity for accuracy when working in manufacturing and warehousing applications. This fixture has a unique open center ventilated LED array afford excellent heat dissipation providing high lumen maintenance over its service life. This UFO Highbay is IP65 rated for wet locations and the housing is corrosion resistant die-cast aluminum. This fixture is also ETL Sanitation Listed (conforms to NSF STD.2) for use in food processing and other clean room applications. 0-10V dimming standard and compatible with several controls. High quality LED chips provide for excellent lumen maintenance. This UFO High Bay ships with a standard 6' 18/3 SJT whip, 0-10v dimming wires and mounting hooks. DLC® Premium.

## PRODUCT FEATURES

- + 120/277V, DLC® Premium
- + Feature 2-stage color temperature adjustment, 3-stage brightness adjustment
- + Operating at 160 lumens per watt
- + ETL Sanitation Listed (conforms to NSF STD.2)
- + Ships with standard 6' 18/3 SJT whip, 1-10v dimming wires and mounting hooks
- + IP65 wet location rated
- + Polycarbonate lens
- + Corrosion resistant die-cast aluminum housing
- + Driver standard with 0-10V dimming (prewired)

Please consult installation instructions for proper application and use of this fixture.

## PRODUCT DIMENSIONS



## PACKAGE DETAILS


Dimensions: 15.43" x 15.43" x 7.09"

Weight: 8.2 lbs


UPC: 840791118887

## COLOR & WATTAGE SELECTION OPTIONS

Step 1:  
Remove the rubber pad from the driver

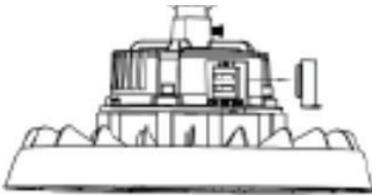


Step 2:  
Use the slide switch to select wattage and color temperature

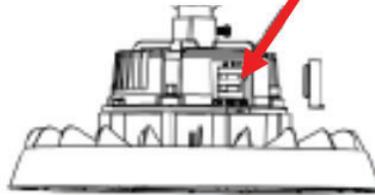


Step 3:  
Attach the rubber pad to the driver




## OPTIONAL ACCESSORIES



Trunion Mount Order Code: 11794




Wire Guard Order Code: 11798



12VDC Microwave Sensor  
Order Code: 11795

\*Remote Control Order Code: 11796



PC Reflector  
Order Code: 11792



Emergency Battery Pack  
Order Code: 11834

\* **Note:** One remote control (11796) for multiple microwave sensors.

