

Project	
Date	
Prepared By	
Model #	HBU300WSCCTW5S

Specifications

ELECTRICAL

Watts: 200, 240, 300

Voltage: 120/347V

Power Factor: ≥ 0.9

THD: $\leq 20\%$

Operating Temp. Range:

-40°C (-40°F) to 50°C (122°F)

LIGHT

Highest Lumens: 48000

Lumens per Watt: 160

Color Temperature: 4000K

& 5000K

CRI: 83

Dimming: 0-10V

AGENCY APPROVALS

UL/cUL: Yes

IP65: Yes

ETL Sanitation: Listed to NSF STD. 2

DLC® Premium: Yes

PRODUCT DETAILS

Housing:

Die-cast Aluminum Alloy

Warranty: 5 years

Fixture Warranty Life:

50,000 hours Weight: 6.17

lbs Dimensions:

7.4" Height, 13.8" Diameter

UFO LED Highbay

Color & Wattage Selectable



ORDER CODE:

11904

MODEL NUMBER:

HBU300WSCCTW5S

COLOR SELECTABLE:

4000K or 5000K

LUMEN LEVELS:

32000 lumens - 200 watts

38400 lumens - 240 watts

48000 lumens - 300 watts

DLC® PRODUCT ID:••

S-G2C84R

PRODUCT DESCRIPTION

EarthTronics LED Highbay delivers excellent energy savings then replacing up to a 1000 watt HID fixtures. This UFO high bay fixture has a 138" diameter design and produces up to 48000 lumens. It features color selection options of 4000K or 5000K with a high 80+ CRI providing excellent visual acuity for accuracy when working in manufacturing and warehousing applications. This fixture has a unique open center ventilated LED array afford excellent heat dissipation providing high lumen maintenance over its service life. This UFO Highbay is IP65 rated for wet locations and the housing is corrosion resistant die-cast aluminum. This fixture is also ETL Sanitation Listed (conforms to NSF STD.2) for use in food processing and other clean room applications. 0-10V dimming standard and compatible with several controls. High quality LED chips provide for excellent lumen maintenance. This UFO High Bay ships with a standard 6' 18/3 SJT whip, 0-10v dimming wires and mounting hooks. DLC® Premium.

PRODUCT FEATURES

- + 120/347V, DLC® Premium
- + Ships with standard 6' 18/3 SJT whip, 1-10v dimming wires and mounting hooks
- + Feature 2-stage color temperature adjustment, 3-stage brightness adjustment
- + IP65 wet location rated
- + Operating at 160 lumens per watt
- + Polycarbonate lens
- + ETL Sanitation Listed (conforms to NSF STD.2)
- + Corrosion resistant die-cast aluminum housing
- + Driver standard with 0-10V dimming (prewired)

PRODUCT DIMENSIONS



PACKAGE DETAILS


Dimensions: 16.46" x 16.46" x 7.17"

Weight: 8.93 lbs


UPC: 8407911189044

COLOR & WATTAGE SELECTION OPTIONS

Step 1:
Remove the rubber pad from the driver

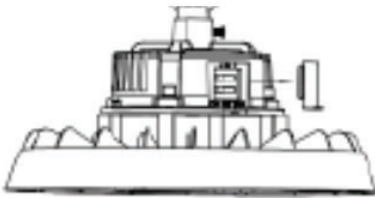


Step 2:
Use the slide switch to select wattage and color temperature

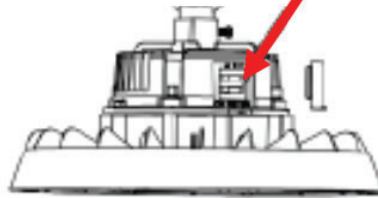


Step 3:
Attach the rubber pad to the driver




OPTIONAL ACCESSORIES



Trunion Mount Order Code: 11893




Wire Guard Order Code: 11892



12VDC Microwave Sensor
Order Code: 11795

*Remote Control Order Code: 11796



PC Reflector
Order Code: 11891



Emergency Battery Pack
Order Code: 11499

* **Note:** One remote control (11796) for multiple microwave sensors.

