

Project	
Date	
Prepared By	
Model#	LTF2X2WSCCTSD5

## **Specifications**

#### **ELECTRICAL**

Watts: 18W/26W/35W Voltage: 120-347V Power Factor: 0.9

Operating Temp. Range:

-20°C - 45°C

#### **LIGHT**

**Initial Lumens:** 

2200LM/3300LM/4400LM

Lumens per Watt: 125

Color Temperature: 3500K, 4000K, 5000K

Ra: >80

Dimming: 0-10V Dimming

Beam Angle: 120°

#### **AGENCY APPROVALS**

**DLC:** Premium **UL1598**: Yes UL8750: Yes FCC: Yes

#### PRODUCT DETAILS

Finish: White Diffuser: PMMA Trim: Alumium Housing: SPCC Warranty: 5 Years

Fixture Rated Life: 36000

## **Earth**Tronics

Norton Shores, Michigan 49441 T: 231.332.1188 | F: 231.726.5029 TOLL FREE: 866.632.7840 www.earthtronics.com

# LED 2x2 Troffer

## Color & Wattage Selectable



ORDER CODE: 11971

**MODEL NUMBER:** LTF2X2WSCCTSD5

WATTS: 18W/26W/35W

**COLOR TEMPERATURE:** 3500K, 4000K, 5000K

LUMENS: 2200LM/3300LM/

4400LM











**DLC® PREMIUM: REBATE AVAILABILITY\*** 

#### PRODUCT DESCRIPTION

The 2x2 Troffer Center Basket LED fixture is a high-performance, energy-efficient lighting solution designed for commercial and office environments. Featuring DLC Premium certification, it offers selectable wattage options (35W, 26W, 18W) with lumen outputs up to 5500 lumens at 125 lm/W, ensuring versatility and efficiency. Its 0-10V dimming with dim-to-off functionality allows seamless integration into lighting control systems, while the durable aluminum housing and PMMA diffuser provide uniform illumination. Designed for damp locations, this fixture is ideal for offices, schools, and retail spaces, boasting a high CRI (>80) for accurate color rendering. With a long lifespan of 36,000 hours at L90, a 5-year warranty, and compliance with UL1598, UL8750, DLC 5.1, and FCC Part 15B standards, it ensures reliability and reduced maintenance costs. Optional sensor modules further enhance control and energy savings, making it a smart choice for any commercial lighting upgrade.

#### PRODUCT FEATURES

+ Color selectable: 3500K, 4000K,

+ Wattage selectable: 18, 26, 35

+ Standard 120-347V

- + 0-10V continuous dimming driver
- + Dimming range of 10% to 100%
- + DLC® Premium

#### **APPLICATION**

- + Office
- + Healthcare Facilites
- + New Construction

- + Commercial
- + Industrial

Please consult installation instructions for proper application and use of this fixture.


\*Rebate availability access it here: www.earthtronics.com/rebate-finder



Color & Wattage Selectable

### PRODUCT DIMENSIONS

**A** 23.7 in / 603mm

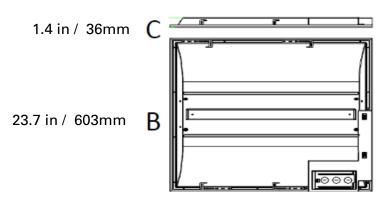

### PACKAGE DETAILS

#### INDIVIDUAL PACKAGE

Individual Carton Qty: 1

Dimensions: 23.7in x 1.4in x 23.7in

Weight: 3.9 lbs UPC: 840791119716

#### MASTER CARTON

Master Carton Oty:

Dimensions:

Weight:

UPC: 84079111971600

### **OPTIONAL ACCESSORIES**

