

Project	
Date	
Prepared By	
Model #	LDFP1X4WSCCTD5

Specifications

ELECTRICAL

Watts: 20/30/40W

Voltage: 120-347VAC

Power Factor: >0.9

Operating Temp. Range:
-40°C (-40°F) - 40°C (104°F)

LIGHT

Lumens:

2500/3750/5000LM

Color Temperature:

3500K, 4000K, 5000K

CRI:

Driver: 0-10V

Dimming: 0-10V dimming
function

AGENCY APPROVALS

ETL/FCC: Yes

DLC® Premium: Yes

PRODUCT DETAILS

Rated Life: 50,000 hrs.

Warranty: 5 years

Weight: 8.29 LBS

Dimensions:

47.72" L x 11.85" W x 1.17" D

Back Light LED Panel 1x4

Color & Wattage Selectable, 120-347V



120-347V



Color
Selectable

ORDER CODE: 12040

MODEL NUMBER:

LDFP1X4WSCCTD5

COLOR SELECTABLE:

3500K, 4000K, 5000K

WATTAGE: 20W/30W/40W

LUMEN LEVEL:

2500LM/3750LM/5000LM

DLC PRODUCT ID:

S-54L021

Low Bay DLC: S-MRVMRO

PRODUCT DESCRIPTION

The EarthTronics 1x4 LED Backlit Panel is designed for offices, schools, healthcare facilities, retail stores, and supermarkets, delivering uniform, glare-free illumination with high luminous efficacy to reduce energy costs. Built with durable materials for excellent heat dissipation and minimal light degradation, it offers a long 50,000-hour rated life and features a high-efficiency driver ($\geq 86\%$) with $PF > 0.9$ for reliable performance. The panel includes 0-10V dimming for smooth brightness control, dustproof construction to prevent yellowing, and selectable color temperatures of 3500K, 4000K, and 5000K for versatile applications. With power-adjustable options and a modern backlit design, this panel combines energy savings, durability, and professional aesthetics for commercial lighting needs.

PRODUCT FEATURES

- + Uniform, glare-free illumination with high luminous efficacy for energy savings
- + Long 50,000-hour rated life with minimal light degradation
- + High-efficiency driver ($\geq 86\%$) with $PF > 0.9$ for reliable performance
- + 0-10V dimming capability for smooth brightness control
- + Durable construction with excellent heat dissipation
- + Dustproof design with no yellowing of the light-guided plate
- + Selectable color temperatures: 3500K, 4000K, 5000K
- + Power-adjustable range for flexible energy use
- + Sleek backlit design for a modern, professional appearance

APPLICATIONS

- + Offices
- + Schools
- + Healthcare Facilities
- + Commercial Applications

Please consult installation instructions for proper application and use of this fixture.


*Rebate availability access it here: www.earthtronics.com/rebate-finder



Back Light LED Panel 1x4

Color & Wattage Selectable, 120-347V

PRODUCT DIMENSIONS

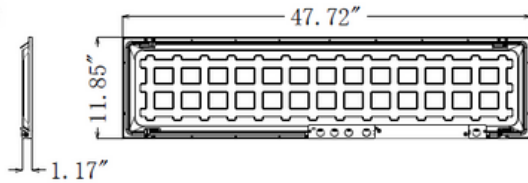

PACKAGE DETAILS

Dimensions:

49.09" L x 5.40" W x 25.39" H

Weight: 33.16 LBS


Carton Weight: 38.18

Carton Quantity: 4


UPC: 840791120408

Master UPC: 84079112040800

OPTIONAL ACCESSORIES



Recessed Drywall Kit
Order Code: 11103

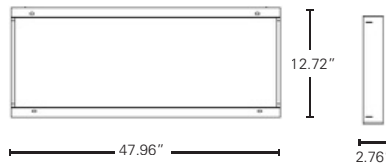

Surface Mount Kit
Order Code: 11531



External Emergency
Backup Unit
Order Code: 11469



EarthConnect
Bluetooth® Mesh Fixture
Controller
Order Code: 11799




EarthConnect
Non-Bluetooth® Mesh Fixture
Controller
Order Code: 11800




EarthConnect
Bluetooth® Mesh PIR Sensor
12V DC
Order Code: 11801

INSTALLATION INSTRUCTIONS


RECESSED INSTALL

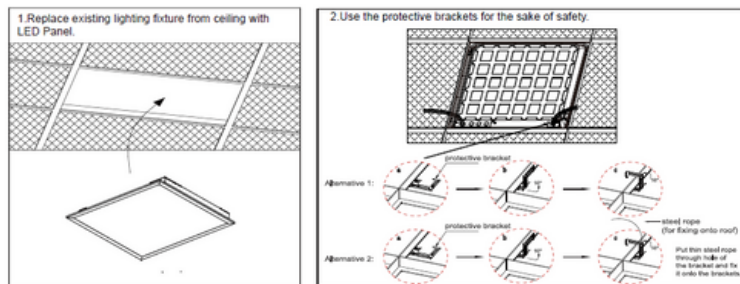

INSTALL GUIDE

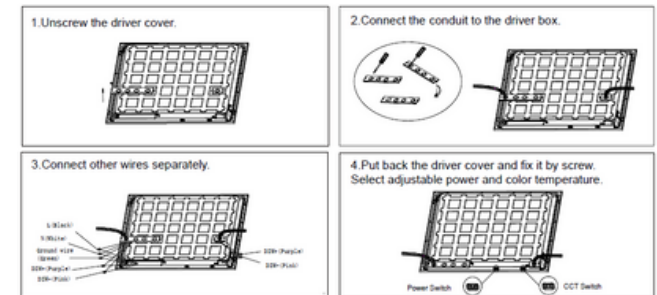

SUSPENSION KIT INSTALL

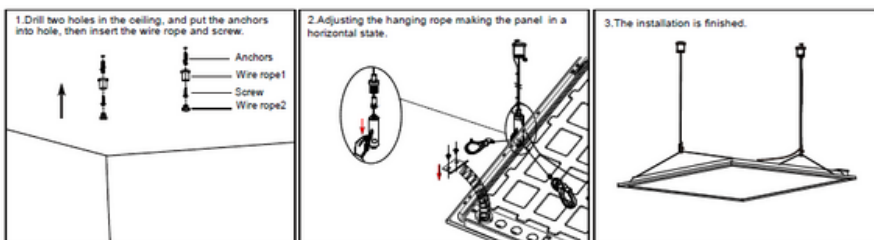

Easily access our DLC qualified products with rebates in your area.

[ACCESS IT HERE: Rebate Finder - Back Light LED Panel](#)

www.earthtronics.com/rebate-finder/catalog/



EarthTronics, Inc. | Norton Shores, MI 49441 | www.earthtronics.com | Email: contact@earthtronics.com

Toll Free: 866.632.7840

Rev. 9.11.25 | ET12040