

Project	
Date	
Prepared By	
Model #	GL-CP3-100W-H-5000KW

Specifications

ELECTRICAL

Watts: 40, 60, 80, 100

Voltage: 120-277VAC

Power Factor: >0.9

Operating Temp. Range:
-22°F (-30°C) to 104°F (40°C)

LIGHT

Lumens:

5,600, 8,400, 11,200 &
14,000

Color Temperature:

3000K, 4000K or 5000K

CRI: 80+

AGENCY APPROVALS

UL: Yes

UL Wet Location Rated: Yes

DLC® Premium: Yes

PRODUCT DETAILS

Finish Color: Brown

Lense: Polycarbonate

Warranty: 5 years

Fixture

Rated Life: 50,000 hours

Lumen Maintenance:

L70 at 54,000 (75°C)

Dimensions:

10.1" L x 10.1" W

LED Canopy

Color and Wattage Selectable



ORDER CODE: 12131

MODEL NUMBER:
GL-CP3-100W-H-5000KW

COLOR SELECTABLE:
3000K, 4000K, 5000K

LUMEN LEVEL:

5,600 lumens - 40 watts
8,400 lumens - 60 watts
11,200 lumens - 80 watts
14,000 lumens - 100 watts

PRODUCT DESCRIPTION

EarthTronics LED Canopy Fixture features a low profile design that provides the flexibility to insure the correct light level and color temperature desired in different applications. Select from 3000K, 4000K or 5000K color temperatures as well as 5,600, 8,400, 11,200, & 14,000 lumen levels, this is easily done by the dial switch located on the side of the product. It features a high 80+ CRI providing an excellent light source for nearly any task. The lens are sealed to and tested for IP65. These canopy fixtures feature 120-277V dual wattage operation. They are equipped standard with a 0 - 10 volt continuous dimming driver with a dimming range capability of 10% to 100%. This fixture is ideal for warehouses, offices, factories, hospitals and hotels. Photocell option is built in which helps improve security. DLC® listed product.

PRODUCT FEATURES

- +Select from 3000K, 4000K & 5000K
- +Wattage selectable: 40, 60, 80, & 100
- +Standard 120-277V
- +0-10V continuous dimming driver
- +Dimming range of 10% to 100%
- +Suitable for wet locations.
- +Sealed to and tested for IP65
- +4K surge protector
- +DLC® Technical Requirement 5.1

APPLICATIONS


- + Warehouses
- + Offices
- + Factories
- + Hotels
- + Hospitals
- + Parking Garage

MOUNTING OPTIONS

- +Surface J-Box
- +Pendant Mount

Please consult installation instructions for proper application and use of this fixture.

PRODUCT DETAILS

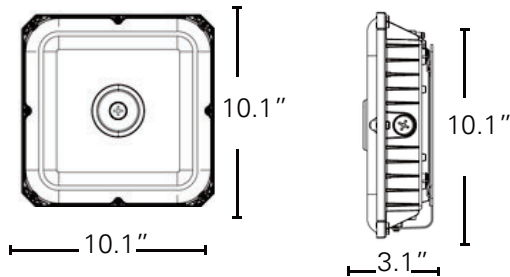

PACKAGE DETAILS

MASTER CARTON

Individual Carton Qty: 5
 Dimensions: 17.7" L x 11.2" W x 11.2" H
 Weight: 24.03 LBS
 UPC: 8 40791121306

COLOR AND WATTAGE SELECTABLE



POWER TUNABLE

40W 60W 80W 100W

CCT TUNABLE

3000K 4000K 5000K

MOUNTING VARIATIONS

Surface Mount

Step1: Lock the retaining plate to the ceiling with four M4*20 self-tapping screws

Fix the board

M4X20 self-tapping screws

Step3: Follow the luminaire wiring diagram to wire the appliance correctly

To Source 120-277VAC

(BLACKLINE) WHITE (NEUTRAL) GREEN (GND)

FIXTURE

PURPLE (DIM+) PINK (DIM-)

DIMMING

Step2: Remove the dust cover, pull the switch to the appropriate gear, and then put the dust cover back in place

CCT & POWER Switch

Step4: Align with the buckle position and shift it and fasten it with screws

Screw

Pendant Mount

Step1: Connecting wire, All connection must be compliant with NEC standards and must be performed by a certified electrician

To Source 120-277VAC

(BLACKLINE) WHITE (NEUTRAL) GREEN (GND)

FIXTURE

PURPLE (DIM+) PINK (DIM-)

DIMMING

Step2: Align the 3/4 inch conduit with the 3/4 thread on the back of the lamp and twist it in

NPT3/4"

Screw

