


CFL

T2 Mini Spiral

MICRO T2 SPIRAL, 23W, 6500K




PRODUCT DESCRIPTION

Micro T2 EarthBulb easily replaces incandescent light bulbs for over 75% energy savings. Fully compliant with European RoHS standards for compact fluorescent bulbs is a commitment EarthTronics has made to the environment with the Micro T2 series. The long 12,000 hour average rated life eliminates 1050 lbs of CO² from being released into the atmosphere and saves \$62 on electricity (at 11¢/kwh) and provides an extended maintenance cycle. Soft white color is standard. The compact Micro T2 mini-spiral EarthBulb may be used in table, floor and desk lamps, ceiling fixtures, pendant fixtures, wall sconces and most general lighting applications. Electronic ballast provides for instant on, no flicker starting.

PRODUCT FEATURES

- RoHS complaint and certified. Ecologically responsible.
- Low Mercury, less than 1.5 mg Hg.
- T2 small size easily replaces standard incandescent light bulb.
- Lead free glass and protective bulb wall coating before the phosphor is applied provides 90% design lumen maintenance.
- Not for use on dimming circuits, timers or remotes.
- Not for use in wet locations.
- Long 12,000 life hour lasts 13 times longer than incandescent.

PRODUCT APPLICATIONS

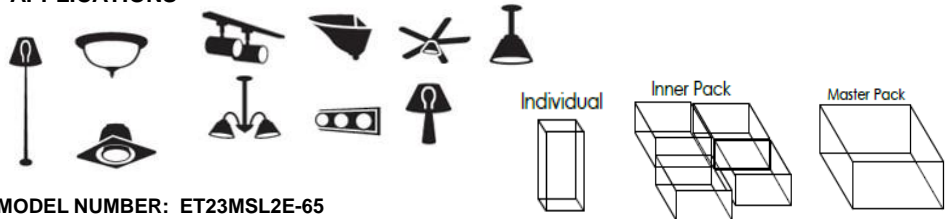

MODEL NUMBER: ET23MSL2E-65

Order Code	Pack Size	Individual UPC	Inner Pack UPC	Qty	Master Park UPC	Qty
CF23DL1B2E	1	840791100257	00840791100257	12	84079110025700	48
CF23DL2B2E	2	TBD	TBD	6	TBD	24
CF23DL4B2E	4	TBD	TBD	3	TBD	12
Dimensions (inches - Length x Width x Height)						
CF23DL1B2E	1	2.56 x 2.56 x 4.96	11.26 x 8.27 x 5.67	12	22.91 x 16.93 x 6.26	48
CF23DL2B2E	2	5.04 x 2.56 x 4.96	10.71 x 8.27 x 5.67	6	21.81 x 16.93 x 6.26	24
CF23DL4B2E	4	10.08 x 2.56 x 4.96	10.59 x 8.39 x 5.67	3	21.57 x 17.17 x 6.26	12
Weight (lbs)						
CF23DL1B2E	1	0.2148	3.02043738	12	13.132	48
CF23DL2B2E	2	0.4146	2.91348112	6	12.676	24
CF23DL4B2E	4	0.8372	2.91951651	3	12.711	12

Electrical	
Watt	23
Input Current	370 (mA)
Power Factor	>0.5
Harmonic Distortion	< 150%
Crest Factor	< 1.70
Voltage	120 volt
Frequency	60hz
Min. Start Temp	0° F
Max. Operating Temp	100° F
Base Type	Medium E26
Light	
Initial Lumens	1500
Lumens per Watt	66
Color Temperature	6500K
Color Rendering (CRI)	> 80
Agency Approvals	
UL	Yes
Rated Hours	12,000 Hrs
RoHS	Yes
FCC	Part 18, Subpart C
Product Details	
Warranty	2 years residential 1 year commercial
Mercury Content	< 1.5
Diameter	2.17
Overall Length	4.73

