

CFL T2 Mini Spiral

MICRO T2 SPIRAL, 13W, SOFT WHITE 2700K




PRODUCT DESCRIPTION

Micro T2 EarthBulb easily replaces incandescent light bulbs for over 75% energy savings. Fully compliant with European RoHS standards for compact fluorescent bulbs is a commitment EarthTronics has made to the environment with the Micro T2 series. The long 12,000 hour average rated life eliminates 1050 lbs of CO² from being released into the atmosphere and saves \$62 on electricity (at 11¢/kwh) and provides an extended maintenance cycle. Soft white color is standard. The compact Micro T2 mini-spiral EarthBulb may be used in table, floor and desk lamps, ceiling fixtures, pendant fixtures, wall sconces and most general lighting applications. Electronic ballast provides for instant on, no flicker starting.

PRODUCT FEATURES

- RoHS complaint and certified. Ecologically responsible.
- Low Mercury, less than 1.5 mg Hg.
- T2 small size easily replaces standard incandescent light bulb.
- Lead free glass and protective bulb wall coating before the phosphor is applied provides 90% design lumen maintenance.
- Not for use on dimming circuits, timers or remotes.
- Not for use in wet locations.
- Long 12,000 life hour lasts 13 times longer than incandescent.

PRODUCT APPLICATIONS

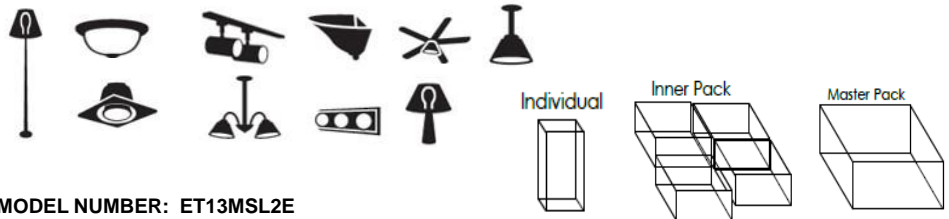

MODEL NUMBER: ET13MSL2E

Order Code	Pack Size	Individual UPC	Inner Pack UPC	Qty	Master Park UPC	Qty
CF13SW1B2E	1	8 11180016992	008 11180017326	12	008 11180017654	48
CF13SW2B2E	2	8 11180017005	008 11180017333	6	008 11180017661	24
CF13SW4B2E	4	8 11180017012	008 11180017340	3	008 11180017678	12
CF13SW6B2E	6	8 11180017029	008 11180017357	3	008 11180017685	6
Dimensions (inches)						
CF13SW1B2E	1	2.01 x 2.01 x 4.37	8.70 x 6.852 x 5.08	12	17.80 x 14.09 x 5.67	48
CF13SW2B2E	2	3.94 x 2.01 x 4.37	8.50 x 6.61 x 5.08	6	17.40 x 13.62 x 5.67	24
CF13SW4B2E	4	7.87 x 2.01 x 4.37	8.39 x 6.73 x 5.08	3	17.17 x 13.86 x 5.67	12
CF13SW6B2E	6	11.65 x 2.01 x 4.37	12.17 x 6.73 x 5.08	3	13.86 x 12.52 x 5.67	6
Weight (lbs)						
CF13SW1B2E	1	0.1513	2.1450403	12	9.4331	48
CF13SW2B2E	2	0.2757	1.93586835	6	8.4213	24
CF13SW4B2E	4	0.5559	1.93787717	3	8.4379	12
CF13SW6B2E	6	0.815	2.78967212	3	6.164	6

Electrical	
Watt	13
Input Current	200 (mA)
Power Factor	> 0.50
Harmonic Distortion	< 150%
Crest Factor	< 1.70
Voltage	120 volt
Frequency	60hz
Min. Start Temp	0° F
Max. Operating Temp	100° F
Base Type	Medium E26
Light	
Initial Lumens	900
Lumens per Watt	69
Color Temperature	2700K
Color Rendering (CRI)	> 80
Agency Approvals	
UL	Yes
Energy Star	Yes - 12,000 Hrs
RoHS	Yes
FCC	Part 18, Subpart C
Product Details	
Warranty	2 years residential 1 year commercial
Mercury Content	< 1.5
Diameter	1.81"
Overall Length	4.02"