


LED 3-Way

5 / 9 / 17 Watt 2700K- RP 3-WAY OMNI LED

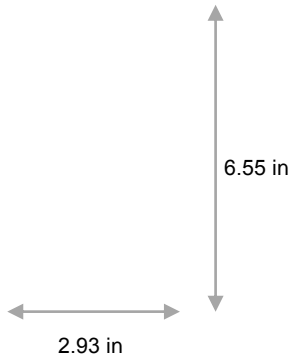


PRODUCT DESCRIPTION

5, 9, 17 watt 3-Way Omni-directional EarthBulb LED provides 450,800,1600 lumens respectively and replaces 40, 60, 100 watt incandescent directional bulbs for over 84% energy savings. 2700K color of light is standard. Great for use in table lamps, floor lamps, wall sconce, and task lighting applications. Multi-Chipset LED and an advanced cooling system provides for 25,000 hours of LED life. Medium screw base. Energy Star rated product.

PRODUCT FEATURES

- This A bulb is Energy Star and provides 450, 800 and 1600 lumens.
- Beam angle provides full radial illumination
- Chipset provides 2700K soft light with a high color rendering rating of over 80


PRODUCT APPLICATIONS

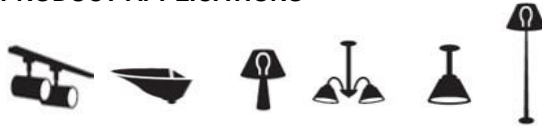

LUMINOUS DISTRIBUTION INTENSITY DATA


| Y(deg) | C(deg) | | | | |
|--------|--------|------|------|------|------|
| | 0 | 23 | 45 | 68 | 90 |
| 0 | 82.9 | 82.8 | 82.7 | 82.6 | 82.5 |
| 5 | 82.9 | 82.7 | 82.6 | 82.4 | 82.3 |
| 10 | 82.8 | 82.7 | 82.6 | 82.5 | 82.5 |
| 15 | 82.9 | 82.8 | 82.8 | 82.8 | 82.8 |
| 20 | 83.1 | 83.0 | 82.9 | 82.9 | 83.0 |
| 25 | 83.3 | 83.2 | 83.1 | 83.1 | 83.2 |
| 30 | 83.7 | 83.5 | 83.4 | 83.4 | 83.5 |
| 35 | 84.1 | 83.8 | 83.6 | 83.6 | 83.7 |
| 40 | 84.3 | 84.0 | 83.7 | 83.7 | 83.8 |
| 45 | 84.4 | 84.0 | 83.7 | 83.7 | 83.8 |
| 50 | 84.4 | 83.9 | 83.5 | 83.4 | 83.6 |
| 55 | 84.1 | 83.6 | 83.1 | 83.0 | 83.2 |
| 60 | 83.6 | 83.0 | 82.5 | 82.3 | 82.5 |
| 65 | 82.9 | 82.2 | 81.6 | 81.4 | 81.7 |
| 70 | 82.0 | 81.3 | 80.6 | 80.3 | 80.6 |
| 75 | 80.9 | 80.0 | 79.3 | 79.0 | 79.3 |
| 80 | 79.5 | 78.6 | 77.8 | 77.5 | 77.7 |
| 85 | 77.8 | 76.9 | 76.1 | 75.7 | 76.0 |
| 90 | 75.9 | 75.0 | 74.1 | 73.7 | 74.0 |

LUMINOUS DISTRIBUTION INTENSITY DIAGRAM

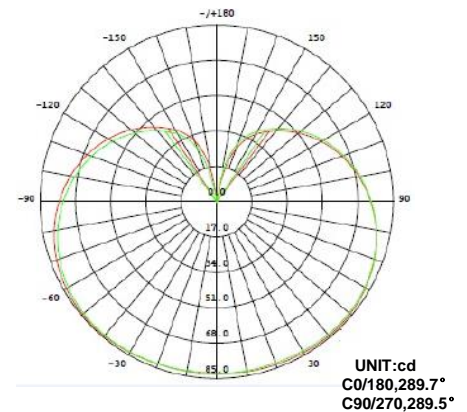

AVERAGE BEAM ANGLE (50%):289.6°

Note: IES files available upon request.

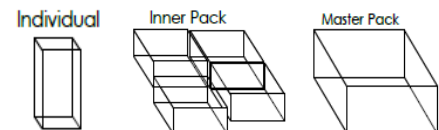

MODEL NUMBER: L3WA211727D

| Order Code | Pack Size | Individual UPC | Inner Pack UPC | Qty | Master Park UPC | Qty |
|---|-----------|--------------------|--------------------|-----|---------------------|-----|
| 10049 | 1 | 840791100493 | 00840791100493 | 6 | 84079110049300 | 24 |
| Dimensions (inches - Length x Width x Height) | | | | | | |
| 10049 | 1 | 2.93 x 2.93 x 6.55 | 9.48 x 6.96 x 7.16 | 6 | 19.3 x 13.54 x 7.71 | 24 |
| Weight (lbs) | | | | | | |
| 10049 | 1 | .50 | 2.87 | 6 | 11.99 | 24 |

| Electrical | |
|-----------------------|---------------------|
| Watt | 5 / 9 / 17 |
| Input Current | 104 (mA) |
| Power Factor | > 0.90 |
| Voltage | 120 volt |
| Frequency | 60hz |
| Min. Start Temp | -4F |
| Max. Operating Temp | 104F |
| Base Type | E26 Medium |
| Light | |
| Initial Lumens | 1600 |
| Lumens per Watt | 94 |
| Color Temperature | 2700K |
| Color Rendering (CRI) | 83 |
| Beam Angle | Omni Directional |
| Agency Approvals | |
| UL | Yes |
| Energy Star | 25,000 rated hours |
| RoHS | Yes |
| FCC | Yes |
| Product Details | |
| Warranty | 10 years, 6 hrs/day |
| Mercury Content | 0 |
| Diameter | 2.93" |
| Overall Length | 6.55" |

