

# LED Wall Pack

## LED Traditional Wall Pack 6000 Lumens 50 Watt 5000K



### PRODUCT DESCRIPTION

EarthTronics Traditional LED Wall Packs provide exterior, wide-flood area illumination for commercial, industrial and municipal facilities. Available in 50 watt with 5000K color of light, these fixtures provide 6000 lumens. The 50 watt models are built in a standard size 14.6"x7.9"x9.5" aluminum alloy housing with a standard bolt pattern. The WP5-Series LED Traditional Style Wall Pack uses industry-leading LED chips and drivers to deliver a quality, energy saving lighting solution. The 5000K color temperature offers building managers the opportunity match existing HID lamps and to reduce the blue light spectrum often associated with higher color temperatures. Each of the EarthTronics Wall Packs accepts 100 – 277-volt AC power supply. The wall packs provide more than 100 lumens per watt and a high 80+ CRI for improved visual acuity and efficient performance. A dusk to dawn sensor is available and is easily added at the time of installation. The design is built to withstand all climates and allows for an extreme temperature range, even operating down to -40 degrees C°, and is IP65 approved for outdoor wet applications. With rated life of 50,000 hours, the WP5 wall pack series is designed for easy installation, directly fitting onto existing electrical boxes, making it the contractor's choice when replacing older high-pressure sodium and metal halide wall packs. DLC listed.

### PRODUCT FEATURES

- + Easily replace existing wall packs for wide area illumination
- + Tempered and impact resistant clear prismatic borosilicate glass lens
- + Die cast aluminum housing provides long life in commercial installations
- + 120° light pattern provides for wide flood distribution
- + 5000K 80CRI is standard
- + IP65 rated for outdoor use
- + Photocell available and easily installed
- + DLC listed
- + 50,000 hour rated life

**Order Code:** 11040

**Model #:** WPT600050BK1


**UPC:** 84079110110409

**DLC Product ID:** PLDTZRWX80GZ

### Dimensions:

- 14.22 inches x 7.64 inches x 9.26 inches

**CAUTION :** If the fixture is to be removed or replaced, please ensure that they electricity is switched off and that the fitting is cool before touching it

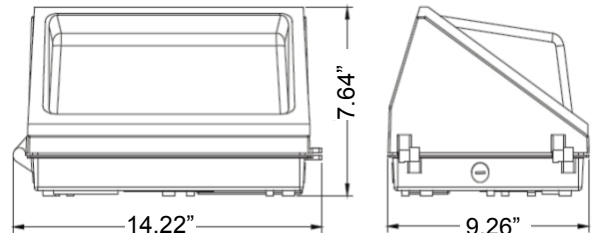

Electrical	
Watt	50
Voltage	100-277V
Power Factor	>0.9
Min. Operating Temperature	-40°C
Light	
Initial Lumens	6000
Lumens per Watt	120
Color Temperature	5000K
Color Rendering (CRI)	80+
Beam Angle	120°
Agency Approvals	
DLC	Yes
RoHS	Yes
ETL	Yes
Product Details	
Housing Material	Aluminum
Lens Material	Glass
Warranty	5 years, 10 year limited
Rated Life	50,000 hours

