

Project	
Date	
Prepared By	
Model #	LSLIM6CCTWH2T

# LED 6" Slim Downlight

850 Lumens, 12 Watt, Color Selectable

## Specifications

### ELECTRICAL

Watts: 12  
Voltage: 120VAC  
Power Factor: 0.97  
Operating Temp. Range:  
-40°F to 135°F

### LIGHT

Initial Lumens: 850  
Lumens per Watt: 70.8  
Color Temperature:  
2700K, 3000K, 3500K,  
4000K and 5000K

CRI: 82  
Dimmable: Yes

### AGENCY APPROVALS


ETL: Yes  
FCC: Yes  
IC Rated: Yes  
Energy Star: Yes

### PRODUCT DETAILS

Lens: Acrylic Warranty:  
5 years  
Fixture  
Rated Life: 50,000 hours  
Weight: 1.18 LBS  
Dimensions:  
6.69" Diameter



Norton Shores, Michigan 49441  
T: 231.332.1188 | F: 231.726.5029  
TOLL FREE: 866.632.7840  
www.earthtronics.com



### ORDER CODE:

11697

### MODEL NUMBER:

LSLIM6CCTWH2T

### ENERGY STAR PRODUCT ID:

2404693

### REBATE AVAILABILITY\*

## PRODUCT DESCRIPTION

6" Slim IC-Rated LED Downlight features five color selectable operation. Switch between 2700K, 3000K, 3500K, 4000K and 5000K easily at the time installation. These slim fixtures can be easily installed in finished drywall or architectural tile ceilings in both commercial and residential applications where space is an issue. They can also be used to retrofit existing recessed downlight fixtures. This fixture provides 71 lumens per watt with a high 80+ CRI for improved visual acuity and efficient performance. It features smooth dimming down to ten percent on typical incandescent dimmer controls. It is IC-rated for use in insulated ceilings and meets IECC air leakage requirements to provide a versatile and attractive downlight product. UL Wet Location listed for use in high humidity areas and bathroom showers. These fixtures are designed for easy installation. For use on 120VAC power supplies. Energy Star certified.

## PRODUCT FEATURES

- + 5 color light selection assures you of the proper light color for every installation
- + Driver is Class 2, FT-6 rated cord
- + IC-Rated & ICC Air Lock
- + Conforms to UL Std.1598, certified to CSA Standard C22.2 No. 250.0
- + 50,000 hour rated life
- + Edge-Lit LED technology provides even illumination
- + IC Rated
- + Wet Location
- + Energy Star certified

## APPLICATIONS

- + Hotel Rooms
- + Schools
- + Long-term care facilities
- + Hospitals
- + Commercial
- + Bathrooms
- + Office Buildings
- + Residential

Please consult installation instructions for proper application and use of this fixture.  
\*Rebate availability access it here: [www.earthtronics.com/rebate-finder](http://www.earthtronics.com/rebate-finder)



DAYLIGHT	5000K
COOL WHITE	4000K
BRIGHT WHITE	3500K
WHITE	3000K
SOFT WHITE	2700K

## PACKAGE DETAILS





### INDIVIDUAL PACKAGE

Individual Carton Qty: 1  
 Dimensions:  
 7.72" Length x 2.48" Width x 7.83" Height  
 Weight: 1.18 LBS  
 UPC: 840791116975

### MASTER CARTON

Master Carton Qty: 6  
 Dimensions:  
 8.37" Length x 14.88" Width x 8.43" Height  
 Weight: 16.33 LBS  
 UPC: 84079111697500

## INSTALLATION

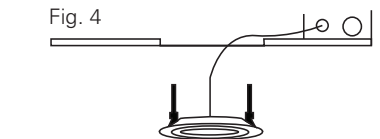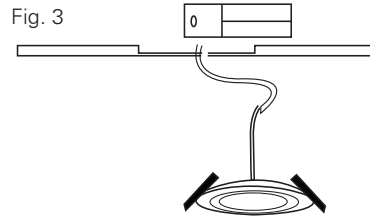

Easily access our Energy Star listed products with rebates in your area.

ACCESS IT HERE: [Rebate Finder LED Slim Downlight](#)

[www.earthtronics.com/rebate-finder/catalog/](http://www.earthtronics.com/rebate-finder/catalog/)

