

# LED 1x4 Panel


## LED Flat Panel 1x4 - 347V 40 Watt 4000 Lumens 3500K



### Product Description

The 1x4 LED Panel light is constructed using an extruded aluminum frame with an attractive impact resistant acrylic lens that helps achieve a wide light distribution pattern. These Panel lights are ideal for use in offices, schools, healthcare, and many other commercial applications. Designed to easily replace 1x4 fluorescent fixtures in retrofit or new construction projects.

This 1x4 panel features 347V voltage operation and is equipped standard with a 0 - 10 Volt continuous dimming driver that works with any standard 0 - 10 Volt control/dimmer. The dimming range is 10% to 100%; varies by control device. The 3500K light and high 82+CRI provides a bright natural light solution. Hanger kits and surface mount kits available (see below). 120/277 volt operation models available.

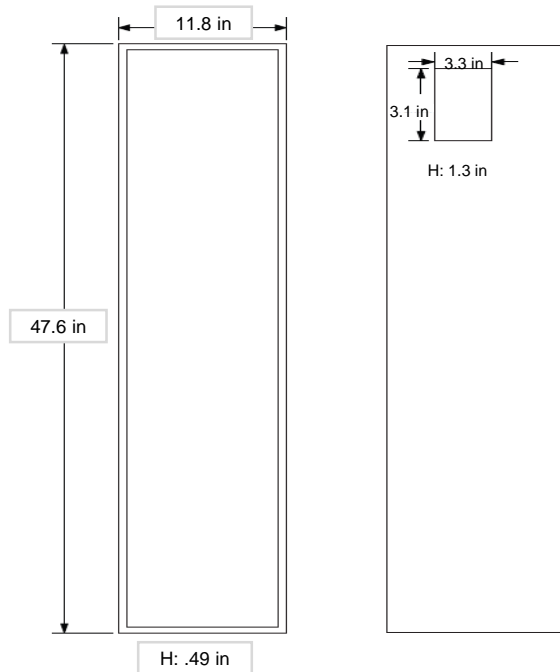

**Order Code:** 10596 – 2pk  
10595 – 1pk

- **Important ordering note:** Please order in 2-packs. Only order single packs when an odd number of Panel Lights is required on a job site.

**DLC Product ID:** PZ8M62R7

**Model:** LFP1X44035D347

**Accessories** (Ordered Separately)

- Surface Mount Kits 1x4 – Order Code: 10459
- Wire Hanger Kit 1x4 - Order Code: 10464

#### Electrical

|                            |                          |
|----------------------------|--------------------------|
| Watt                       | 40                       |
| Voltage                    | 347V                     |
| Min. Start Temperature     | -40°C                    |
| Max. Operating Temperature | 40°C                     |
| Driver Type                | Class2                   |
| Driver Output              | 27-42V<br>Direct Current |
| Dimming                    | 0 – 10 Volt              |

#### Light

|                       |       |
|-----------------------|-------|
| Initial Lumens        | 4000  |
| Lumens per Watt       | 100   |
| Color Temperature     | 3500K |
| Color Rendering (CRI) | 80    |
| Beam Angle            | 110°  |

#### Agency Approvals

|     |     |
|-----|-----|
| DLC | Yes |
| FCC | Yes |
| ETL | Yes |

#### Product Details

|                  |                   |
|------------------|-------------------|
| Housing Material | Extruded Aluminum |
| Lens Material    | Acrylic           |
| Warranty         | 5 years           |
| Rated Life       | 50,000 hours      |

