

LED Plug In

12 Watt 3000K 4-Pin Downlight Vertical LPD12IS/G24q/830V LED Plug In




PRODUCT DESCRIPTION

EarthTronics 12 watt LED, LPD12IS/G24q/830V easily replaces 13, 18 and 26 watt G24q-2 base compact fluorescent lamps and provides 33% energy savings. This plug-in lamp design is primarily for downlight use and is built to be used vertically within downlight fixtures where the plug-in lamp socket is mounted at the top of the fixture. All light is emitted from the end of the lamp in a downlight pattern providing for maximum fixture efficiency. This lamp produces 1100 lumens and works directly on existing 13, 18 and 26 watt compact fluorescent instant start electronic ballast. No rewiring necessary. Instant on, no warm up time and a long service life make this lamp an easy choice in many applications. Available colors include 3000K, 4000K and 5000K and the CRI rating is >80. The lamp may be used in any orientation in open fixtures. The 50,000 hour rated life provides 5 times the service life of a typical compact fluorescent lamp. DLC 4.2 listed. Not for use in enclosed fixtures.


PRODUCT FEATURES

- Directional downlight design and extensive heat sink make this perfect for recessed downlight fixtures.
- Works directly on instant start electronic ballasts for easy "plug & play" installation.
- LED provides instant on and full brightness – no waiting.
- Also available in 4000K and 5000K color temperatures.



APPLICATIONS

- Recessed downlights




G24q-2 base, 4-pin

Replaces:

- 13 watt CFL G24q-1
- 18 watt CFL G24q-2
- 26 watt CFL G24q-3
- Not for use on 32 or 42 watt CFL ballasts

Cautions:

- Maybe used on 2 lamp ballast. Not for use in enclosed fixtures.
- This 4-pin LED lamp is intended for use on Instant Start ballasts.
- Not for use with dimmer controls.
- Not for use with emergency lighting.

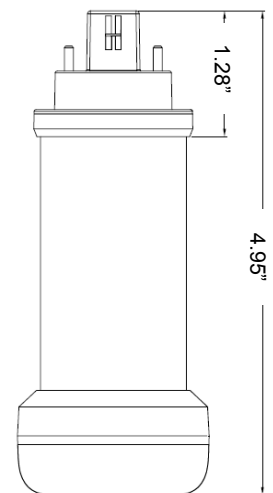

Ordering Code: 10703



Model Number: LPD12ISG24q830V

DLC Product ID: PL21LAU6KX58

Individual

Inner Pack

Master Pack



Order Code	Pack Size	Individual UPC	Inner Pack UPC	Qty	Master Pack UPC	Qty
10703	1	840791107034	00840791107034	12	84079110703400	48
Dimensions (inches - Length x Width x Height)						
10703	1	5.03 x 1.98 x 1.98	8.50 x 6.42 x 5.55	12	13.23 x 8.86 x 11.73	48
Weight (lbs)						
10703	1	0.25	2.62	12	10.91	48

Electrical	
Watt	12 watt
Power Factor	> 0.50
Ballast required	Instant Start Electronic
Base Type	G24q-2, 4-Pin
Min. Start Temp	0° F
Max. Operating Temp	120° F
Light	
Initial Lumens	1100
Lumens per Watt	91 lpw
Color Temperature	3000K
Color Rendering (CRI)	82
Beam Angle	105°
Agency Approvals	
UL	Yes
DLC	Yes
FCC	Yes
Product Details	
Warranty	5 year, 10 year limited
Mercury Content	No Hg
Overall Length	4.95"

