

|             |             |
|-------------|-------------|
| Project     |             |
| Date        |             |
| Prepared By |             |
| Model #     | WPT10040BK5 |

## Specifications

### ELECTRICAL

**Watts:** 100  
**Voltage:** 100-347VAC  
**Power Factor:** >0.9  
**Operating Temp. Range:**  
 -40°F to 131°F

### LIGHT

**Initial Lumens:** 12600  
**Lumens per Watt:** 126  
**Color Temperature:** 4000K  
**CRI:** >80

### AGENCY APPROVALS

**DLC® Premium:** Yes  
**UL/ cUL:** Yes  
**RoHS:** Yes

### PRODUCT DETAILS

**Lens:** Glass  
**Warranty:** 5 years  
**Fixture**  
**Rated Life:** 50,000 hours  
**Weight:**  
 11.41 lbs  
**Dimensions:**  
 14.2" L x 9.4" W x 9.8" H

# Traditional LED Wall Pack

12600 Lumens, 100 Watt, 4000K, 100-347V



**ORDER CODE:**  
 11352

**MODEL NUMBER:**  
 WPT10040BK5

**DLC PRODUCT ID:**  
 PLXMNTLHZO60

**REBATE AVAILABILITY\***

## PRODUCT DESCRIPTION

EarthTronics Traditional LED Wall Packs provide exterior, wide-flood area illumination for commercial, industrial and municipal facilities. Available in 100 watt with 4000K color of light, these fixtures provide 12600 lumens. The 100 watt models are built in a standard size with an aluminum alloy housing with a standard bolt pattern. The LED Traditional Style Wall Pack uses Lumiled LED chips and drivers to deliver a quality, energy saving lighting solution. The 4000K color temperature offers building managers the opportunity match existing HID lamps to reduce the blue light spectrum often associated with higher color temperatures. The wall packs provide more than 126 lumens per watt and a high 80+ CRI for improved visual acuity and efficient performance. The design is built to withstand all climates and allows for an extreme temperature range, even operating down to -40 degrees F°, and is IP65 approved for outdoor wet applications. DLC® premium listed product.

## PRODUCT FEATURES


- + 100-347VAC
- + DLC® Premium
- + Easily replace existing wall packs for wide area illumination
- + Tempered and impact resistant clear prismatic borosilicate glass lens
- + IP65 rated for outdoor use
- + Die cast aluminum housing provides long life in commercial installations
- + 12600 lumens, 126 lumens per watt
- + 110° light pattern provides for wide flood distribution

## APPLICATIONS

- + Commercial Building
- + Industrial
- + Municipal Facilities

Please consult installation instructions for proper application and use of this fixture.  
 \*Rebate availability access it here: [www.earthtronics.com/rebate-finder](http://www.earthtronics.com/rebate-finder)

## PRODUCT DIMENSIONS

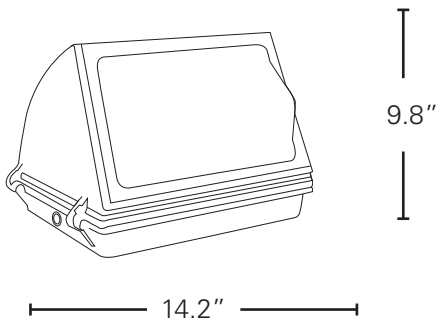

## PACKAGE DETAILS

### Dimensions:

15.75" Length x 11.81" Width x 12.60" Height

Weight: 13.42 LBS

UPC: 840791113523

## PRODUCT VIEWS



Front View



Side View



Rear View

## OPTIONAL ACCESSORIES



Traditional Wall Pack  
Backup Driver

Order Code: 11468

Easily access our DLC qualified products with rebates in your area.

ACCESS IT HERE: [Traditional LED Wall Pack](#)

[www.earthtronics.com/rebate-finder/catalog/](http://www.earthtronics.com/rebate-finder/catalog/)

