

Project	
Date	
Prepared By	
Model #	PLL17840B

Specifications

ELECTRICAL

Watts:
17 watt lamp

Voltage:
Direct Wire, 120/277VAC

Base Type: 2G11

Power Factor: 0.9

Operating Temp. Range:
-20°C to 45°C

LIGHT

Initial Lumens: 2200

Lumens per Watt: 129

Color Selectable:
4000K

CRI: >82

AGENCY APPROVALS

UL/ FCC: Yes, Type B

DLC®: Yes

RoHS: Yes

PRODUCT DETAILS

Diffuser Type:
Internal coated glass tube

Warranty: 10 years


Fixture

Rated Life: 50,000 hours

Dimensions:
1.54" Diameter
22.5" Length
0.65" Tube

PL-L Type B

2200 Lumens, 17 Watt, 4000K

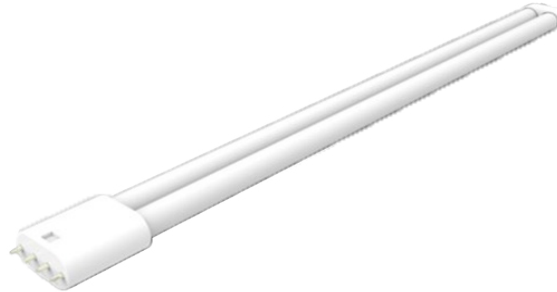

ORDER CODE:
11403

MODEL NUMBER:
PLL17840B

UPC:
840791114032

DLC® PRODUCT ID:
PLS7U4J3HL0Q

REBATE AVAILABILITY*

PRODUCT DESCRIPTION

17 watt EarthBulb LED PL - L is available in 4000K with a 300 degree beam angle. Great light output and a replacement to 22.5" long 2G11 base PL - L lamp. This linear tube provides 2200 lumens and has a CRI of 82. The lamp is complete with an internal universal driver for direct wire use on 120/277VAC power supplies which eliminates ballast maintenance and compatibility concerns. Perfect for applications with frequent on-off for energy savings is required. This lamp is engineered for high lumen maintenance over its 50,000 hour rated life. To install, simply remove the existing fluorescent ballast and direct wire the line voltage to the one end of the lamp. Suitable for dry and damp locations in addition to open and enclosed fixtures. Not for use with dimmer controls. Not for emergency lighting. DLC® listed product.

PRODUCT FEATURES

- + 4000K color of light, 80+ CRI
- + Provides 2200 lumen
- + Easily retrofit 22.5" long PL-L 2G11 fluorescent lamps
- + DLC® listed product
- + Suitable for damp or dry locations
- + May be used in enclosed fixtures
- + 50,000 hour rated life
- + UL Type B for direct wire use

