

Project	
Date	
Prepared By	
Model #	PLL17850B

## Specifications

### ELECTRICAL

**Watts:**  
17 watt lamp

**Voltage:**  
Direct Wire, 120/277VAC

**Base Type:** 2G11

**Power Factor:** 0.9

**Operating Temp. Range:**  
-20°C to 45°C

### LIGHT

**Initial Lumens:** 2200

**Lumens per Watt:** 129

**Color Selectable:**  
5000K

**CRI:** >82

### AGENCY APPROVALS

**UL/ FCC:** Yes, Type B

**DLC®:** Yes

**RoHS:** Yes

### PRODUCT DETAILS

**Diffuser Type:**  
Internal coated glass tube


**Warranty:** 10 years

**Fixture**  
**Rated Life:** 50,000 hours

**Dimensions:**  
1.54" Diameter  
22.5" Length  
0.65" Tube

# PL-L Type B

2200 Lumens, 17 Watt, 5000K

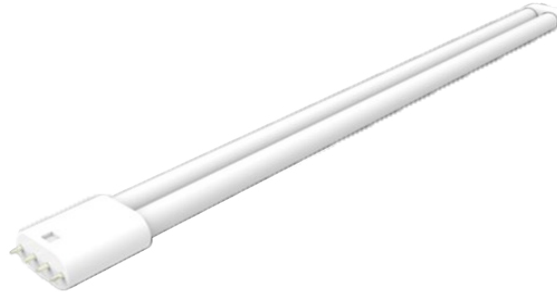

### ORDER CODE:

11404

### MODEL NUMBER:

PLL17850B

### UPC:

840791114049

### DLC® PRODUCT ID:

PLBZVENXD68Q

### REBATE AVAILABILITY\*

## PRODUCT DESCRIPTION

17 watt EarthBulb LED PL - L is available in 5000K with a 300 degree beam angle. Great light output and a replacement to 22.5" long 2G11 base PL - L lamp. This linear tube provides 2200 lumens and has a CRI of 82. The lamp is complete with an internal universal driver for direct wire use on 120/277VAC power supplies which eliminates ballast maintenance and compatibility concerns. Perfect for applications with frequent on-off for energy savings is required. This lamp is engineered for high lumen maintenance over its 50,000 hour rated life. To install, simply remove the existing fluorescent ballast and direct wire the line voltage to the one end of the lamp. Suitable for dry and damp locations in addition to open and enclosed fixtures. Not for use with dimmer controls. Not for emergency lighting. DLC® listed product.

## PRODUCT FEATURES

- + 5000K color of light, 80+ CRI
- + Provides 2200 lumen
- + Easily retrofit 22.5" long PL - L 2G11 fluorescent lamps
- + DLC® listed product
- + Suitable for damp or dry locations
- + May be used in enclosed fixtures
- + 50,000 hour rated life
- + UL Type B for direct wire use

