

LED BR30

1 Watt 112.7° Beam Angle 2700K BR30 LED



Electrical	
Watt	1
Input Current	143 (mA)
Power Factor	0.95
Voltage	120 volt
Frequency	60hz
Min. Start Temp	-4F
Max. Operating Temp	104F
Base Type	E26 Medium
Light	
Initial Lumens	610
Lumens per Watt	112.7
Color Temperature	2700K
Color Rendering (CRI)	80
Beam Angle	110°
Agency Approvals	
UL	Yes
Energy Star	65,000 hr rated
RoHS	Yes
FCC	Yes
Product Details	
Warranty	5 years
Mercury Content	0
Diameter	3.71"
Overall Length	5.2"

PRODUCT DESCRIPTION

1 watt BR30 EarthBulb LED floodlight replaces 65 watt incandescent floodlights for over 80% energy savings. Great for use in dimming recessed lighting, track lighting and display lighting applications. Multi-Chipset high power LED and an advanced cooling system provides for 65,000 hours of LED life. Medium screw base. Energy Star rated product.

PRODUCT FEATURES

- Dimming BR30 flood light is provides 610 lumens, capable of dimming to less than 10%
- Damp location rated
- Full 110° beam angle provides full radial illumination
- Chipset provides 2700K soft white light with a high color rendering rating of over 80

PRODUCT APPLICATIONS




CONE OF LIGHT

Lumens: 610

Distance ft	Foot Candles fc	Diameter ft
2	57.07	6.45
4	14.27	12.91
6	6.34	19.36
8	3.56	25.82
10	2.28	32.27




LUMINOUS DISTRIBUTION INTENSITY DIAGRAM

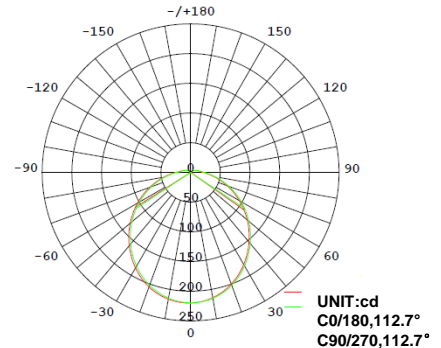

AVERAGE BEAM ANGLE (50%): 112.7°

Note: IES files available upon request.



MODEL NUMBER: LBR3827DLL

Order Code	Individual UPC	Master Park UPC	Qty
FFHJ	840791FFHJ	8407911FFHJ100	12
Dimensions (inches)			
1FHJ	3.14 x 3.14 x 5.2	3.14 x 3.14 x 5.2	12
Weight (lbs)			
1FHJ	0.682	7.40	12

