

Project	
Date	
Prepared By	
Model #	LVT4WSCCTD5

Specifications

ELECTRICAL

Watts: 34, 38, 45

Voltage: 120-347VAC

Power Factor: >0.9

Operating Temp. Range:
-40°C (-40°F) to 50°C (122°F)

LIGHT

Initial Lumens:
4450, 4950, 5850

Color Temperature:
3500K, 4000K, 5000K

CRI: 80+

AGENCY APPROVALS

DLC®: Yes

UL Wet Location: Yes

ETL Sanitation: Listed to NSF STD.2

PRODUCT DETAILS

Lens: Frost Polycarbonate

Fixture: Corrosion Resistant

Warranty: 5 years

Fixture

Rated Life: 50,000 hours


Lumen Maintenance:
L70 at 100,000 hrs (70°C)

Weight: 3.96 LBS

Dimensions:
47.2"L x 3.35"H

LED Vapor Tight 48"

Color and Wattage Selectable



ORDER CODE:
11631

MODEL NUMBER:
LVT4WSCCTD5

COLOR SELECTABLE:
3500K, 4000K, 5000K

LUMEN LEVEL:
4450 lumens - 34 watts
4950 lumens - 38 watts
5850 lumens - 45 watts

DLC PRODUCT ID:
S-XN7ZGC

REBATE AVAILABILITY*

PRODUCT DESCRIPTION

EarthTronics LED Vapor Tight fixture provides the flexibility to insure the correct light level and color temperature desired in different applications. Select from 3500K, 4000K or 5000K color temperatures as well as 4450, 4950 or 5850 lumen levels with a switch located on the LED module holder plate. This fixture is ETL Sanitation Listed (conforms to NSF STD.2) for use in food processing and other clean room applications where washdown and product safety are important. This vapor tight fixture is corrosion resistant. The polycarbonate housing and lens are sealed to and tested for IP65. This vapor tight fixture is ideal for commercial and industrial environments where water, humidity and dust may occur. DLC® listed product.

PRODUCT FEATURES

- + This fixture is corrosion resistant
- + 0-10 volt dimming
- + Color selectable: 3500K, 4000K or 5000K
- + L70 TM-21 at 100,000 hours (70°C)
- + DLC® technical requirement version 5.1
- + Clips are stainless steel
- + 50,000 hour rated life
- + Factory preset to maximum wattage, 4000K
- + 120-347VAC
- + Sealed to and tested for IP65
- + 80+ CRI

APPLICATIONS

- + Parking Garage
- + Stairwells
- + Utility Areas
- + Cold Storage
- + Outdoor Retail

Please consult installation instructions for proper application and use of this fixture.
*Rebate availability access it here: www.earthtronics.com/rebate-finder

PACKAGE DETAILS

INDIVIDUAL PACKAGE

Individual Carton Qty: 1

Dimensions:

49.3" Length x 4.02" Width x 3.19" Depth

Weight: 5.5 LBS

UPC: 840791116319

MASTER CARTON

Master Carton Qty: 4


Dimensions:

51.50" Length x 8.27" Width x 7.28" Height

Weight: 24.69 LBS

UPC: 84079111631900

PRODUCT DIMENSIONS

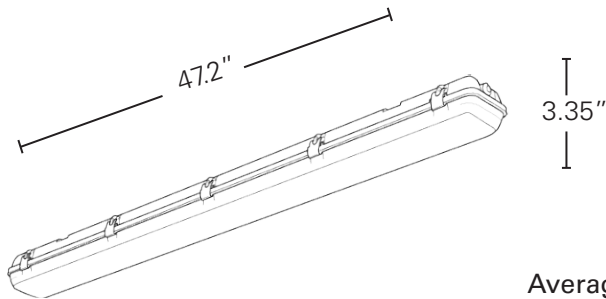


Average Illuminance: 35 fc

Number of Luminaires: 6

Workplane Height: 2.5 ft

LIGHTING LAYOUT

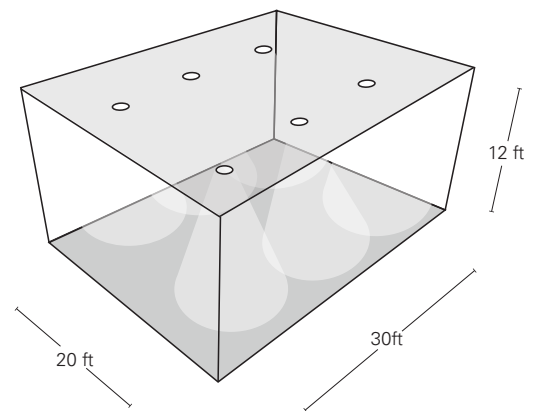

OPTIONAL ACCESSORIES



Sensor

Order Code: 10980



Remote Control

Order Code: 10987



VaporTight Backup Driver

Order Code: 11468

Easily access our DLC qualified products with rebates in your area.

ACCESS IT HERE: [Rebate Finder - LED VaporTight](#)

www.earthtronics.com/rebate-finder/catalog/

