

Project	
Date	
Prepared By	
Model #	LVT8WSCCTD5

## Specifications

### ELECTRICAL

**Watts:** 65, 75, 90

**Voltage:** 120-347VAC

**Power Factor:** >0.9

**Operating Temp. Range:**  
-40°C (-40°F) to 50°C (122°F)

### LIGHT

**Initial Lumens:**  
8500, 9900, 11700

**Color Temperature:**  
3500K, 4000K, 5000K

**CRI:** 80+

### AGENCY APPROVALS

**UL Wet Location:** Yes

**ETL Sanitation:** Listed to NSF STD.2

**DLC®:** Yes

### PRODUCT DETAILS

**Lens:** Frost Polycarbonate

**Fixture:**  
Corrosion Resistant

**Warranty:** 5 years

**Fixture**  
**Rated Life:** 50,000 hours

**Lumen Maintenance:**  
L70 at 100,000 hrs (70°C)


**Weight:** 7.9 LBS

**Dimensions:**

96" L x 3.35" H

# LED Vapor Tight 96"

Color and Wattage Selectable



### ORDER CODE:

11632

### MODEL NUMBER:

LVT8WSCCTD5

### COLOR SELECTABLE:

3500K, 4000K, 5000K

### LUMEN LEVEL:

8500 lumens - 65 watts

9900 lumens - 75 watts

11700 lumens - 90 watts

### DLC PRODUCT ID:

S-4IE31B

### REBATE AVAILABILITY\*

## PRODUCT DESCRIPTION

EarthTronics LED Vapor Tight fixture provides the flexibility to insure the correct light level and color temperature desired in different applications. Select from 3500K, 4000K or 5000K color temperatures as well as 8500, 9900 or 11700 lumen levels with a switch located on the LED module holder plate. This fixture is ETL Sanitation Listed (conforms to NSF STD.2) for use in food processing and other clean room applications where washdown and product safety are important. The polycarbonate housing and lens are sealed to and tested for IP65. The polycarbonate enclosure is easily installed as well as easy to service and clean. This vapor tight fixture is corrosion resistant. 0-10V dimming standard and compatible with several controls. This vapor tight fixture is ideal for commercial and industrial environments where water, humidity and dust may occur. DLC® listed product.

## PRODUCT FEATURES

- + This fixture is corrosion resistant
- + 0-10 volt dimming
- + Color selectable: 3500K, 4000K or 5000K
- + L70 TM-21 at 100,000 hours (70°C)
- + DLC® listed
- + 50,000 hour rated life
- + Factory preset to maximum wattage, 4000K
- + 120-347VAC
- + Sealed to and tested for IP65
- + Stainless steel clips
- + 80+ CRI

## APPLICATIONS

- + Parking Garage
- + Stairwells
- + Utility Areas
- + Cold Storage
- + Outdoor Retail

Please consult installation instructions for proper application and use of this fixture.

\*Rebate availability access it here: [www.earthtronics.com/rebate-finder](http://www.earthtronics.com/rebate-finder)

## PACKAGE DETAILS

### INDIVIDUAL PACKAGE

Individual Carton Qty: 1

Dimensions:

95.67" Length x 3.93" Width x 3.15" Depth

Weight: 9.25 LBS

UPC: 840791116326

### MASTER CARTON

Master Carton Qty: 4


Dimensions:

96.46" Length x 8.27" Width x 7.28" Height

Weight: 40.79 LBS

UPC: 84079111632600

## PRODUCT DIMENSIONS

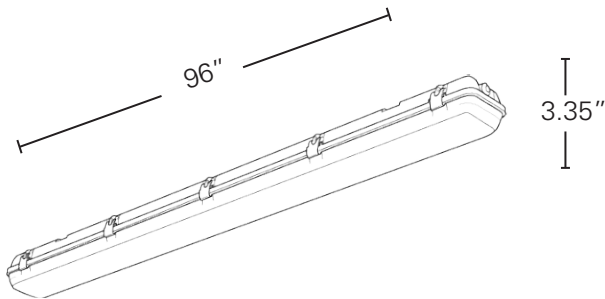

## OPTIONAL ACCESSORIES



Sensor

Order Code: 10980



Remote Control

Order Code: 10987



VaporTight Backup Driver

Order Code: 11468

Easily access our DLC qualified products with rebates in your area.

**ACCESS IT HERE:** [Rebate Finder - LED VaporTight](#)

[www.earthtronics.com/rebate-finder/catalog/](http://www.earthtronics.com/rebate-finder/catalog/)

