

Project	
Date	
Prepared By	
Model #	LST8WSCCTD1

Specifications

ELECTRICAL

Watts: 65, 75, 90

Voltage: 120-277VAC

Power Factor: 0.9

Operating Temp. Range:
-20°C (-4°F) to 50°C (122°F)

LIGHT

Initial Lumens:

8450, 9750, 11700

Color Temperature:
3500K, 4000K, 5000K

CRI: 80+

AGENCY APPROVALS

UL Listed 1598: Suitable for
dry and damp locations

DLC® Listed: Yes

PRODUCT DETAILS

Lens: Frost Polycarbonate

Warranty: 5 years

Fixture

Rated Life: 50,000 hours

Lumen Maintenance: L70
at 100,000 hrs (70°C)

Weight: 5.40 LBS

Dimensions:

48.82" L x 3.70" W x 3.78" D



LED Strip 96"

Color and Wattage Selectable



ORDER CODE:

11610

MODEL NUMBER:

LST8WSCCTD1

COLOR SELECTABLE:

3500K, 4000K, 5000K

LUMEN LEVEL:

8450 lumens - 65 watts

9750 lumens - 75 watts

11700 lumens - 90 watts

DLC® PRODUCT ID:

S-ZBCN6F

REBATE AVAILABILITY*

PRODUCT DESCRIPTION

EarthTronics LED Strip fixture provides the flexibility to insure the correct light level and color temperature desired in different applications. Select from 3500K, 4000K or 5000K color temperatures as well as 8450, 9750 or 11700 lumen levels, this is easily done by the two DIP switch buttons integrated into the driver. This strip fixture is a standard 48" long. It features a high 80+ CRI providing an excellent light source for nearly any task. The fixture body is white painted durable steel with a polycarbonate lens. These strip fixtures feature 120-277V dual wattage operation. They are equipped standard with a 0 - 10 volt continuous dimming driver with a dimming range capability of 10% to 100%. DLC® listed product.

PRODUCT FEATURES

- + Color selectable: 3500K, 4000K or 5000K
- + Wattage selectable: 65, 75, 90
- + Standard 120-277V
- + Dimming range of 10% to 100%
- + UL 1598 suitable for dry and damp locations
- + DLC® Listed
- + L70 at 100,000 hours (70°C)
- + Factory preset to maximum wattage, 4000K
- + Microwave sensor available
- + 0-10V continuous dimming driver
- + Emergency back-up power supply available

APPLICATIONS

- + Manufacturing
- + Education
- + New Construction
- + Low-Bay
- + General Lighting

Please consult installation instructions for proper application and use of this fixture.

*Rebate availability access it here: www.earthtronics.com/rebate-finder

PACKAGE DETAILS

INDIVIDUAL PACKAGE

Individual Carton Qty: 1

Dimensions:

95.56" Length x 3.71" Width x 3.78" Depth

Weight: 10.81 LBS

UPC: 840791116104

MASTER PACKAGE

Master Carton Qty: 4


Dimensions:

96.42" Length x 7.80" Width x 8.19" Depth

Weight: 48.07 LBS

UPC: 84079111610400

LIGHTING LAYOUT

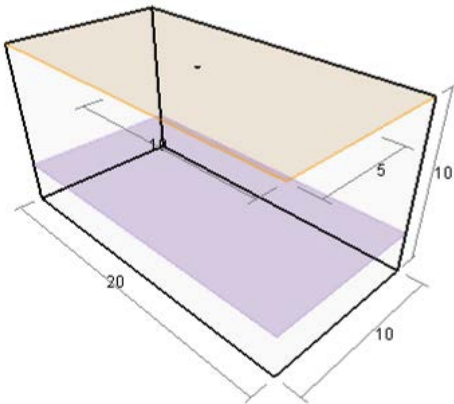

Average Illuminance: 27 fc

Number of Luminaires: 1

Workplane Height: 2.5 ft

OPTIONAL ACCESSORIES



Microwave Sensor 120/277V
(stand-alone)
Order Code: 11638



Right Angle
Connector
Order Code: 11820



8ft Wireguard
Order Code: 11822




Emergency Back-up
Driver & Battery
Order Code: 11639



Remote Control for
Microwave Sensor*
Order Code: 11683



Row Connector
Order Code: 11819



8ft Replacement Lens
Order Code: 11738

*Note: 11683 - one remote control
for multiple sensors.

Easily access our DLC qualified products with rebates in your area.

ACCESS IT HERE: [Rebate Finder](#)

www.earthtronics.com/rebate-finder/catalog/

