

Project	
Date	
Prepared By	
Model #	LST4WSCCTD5

Specifications

ELECTRICAL

Watts: 22, 28, 40

Voltage: 120-347VAC

Power Factor: 0.9

Operating Temp. Range:
-20°C (-4°F) to 50°C (122°F)

LIGHT

Initial Lumens:
2860, 3640, 5200

Color Temperature:
3500K, 4000K, 5000K

CRI: 80+

AGENCY APPROVALS

UL Listed 1598: Suitable for
dry and damp locations

DLC® Listed: Yes

PRODUCT DETAILS

Lens: Frost Polycarbonate

Warranty: 5 years

Fixture
Rated Life: 50,000 hours
Lumen Maintenance: L70
at 100,000 hrs (70°C)
Weight: 5.40 LBS
Dimensions:
48.82" L x 3.70" W x 3.78" D



Norton Shores, Michigan 49441
T: 231.332.1188 | F: 231.726.5029
TOLL FREE: 866.632.7840
www.earthtronics.com

LED Strip 48"

Color and Wattage Selectable



ORDER CODE:
11629

MODEL NUMBER:
LST4WSCCTD5

COLOR SELECTABLE:
3500K, 4000K, 5000K

LUMEN LEVEL: 2860
lumens - 22 watts 3640
lumens - 28 watts 5200
lumens - 40 watts

DLC® PRODUCT ID:
S-W7LYXJ

REBATE AVAILABILITY*

PRODUCT DESCRIPTION

EarthTronics LED Strip fixture provides the flexibility to insure the correct light level and color temperature desired in different applications. Select from 3500K, 4000K or 5000K color temperatures as well as 2860, 3640 or 5200 lumen levels, this is easily done by the two DIP switch buttons integrated into the driver. This strip fixture is a standard 48" long. It features a high 80+ CRI providing an excellent light source for nearly any task. The fixture body is white painted durable steel with a polycarbonate lens. These strip fixtures feature 120-347V dual wattage operation. They are equipped standard with a 0 - 10 volt continuous dimming driver with a dimming range capability of 10% to 100%. DLC® listed product.

PRODUCT FEATURES

- + Color selectable: 3500K, 4000K or 5000K
- + Wattage selectable: 22, 28, 40
- + Standard 120-347V
- + Dimming range of 10% to 100%
- + UL 1598 suitable for dry and damp locations
- + DLC® Listed
- + L70 at 100,000 hours (70°C)
- + Factory preset to maximum wattage, 4000K
- + Microwave sensor available
- + 0-10V continuous dimming driver
- + Emergency back-up power supply available

APPLICATIONS

- + Manufacturing
- + Education
- + New Construction
- + Low-Bay
- + General Lighting

Please consult installation instructions for proper application and use of this fixture.

*Rebate availability access it here: www.earthtronics.com/rebate-finder

PACKAGE DETAILS


INDIVIDUAL PACKAGE

Individual Carton Qty: 1
Dimensions:
48.82" Length x 3.70" Width x 3.78"
Depth Weight: 5.40 LBS
UPC: 840791116296

MASTER CARTON

Master Carton Qty: 6
Dimensions:
49.41" Length x 11.73" Width x 8.23" Height
Weight: 35.49 LBS
UPC: 84079111629600

LIGHTING LAYOUT

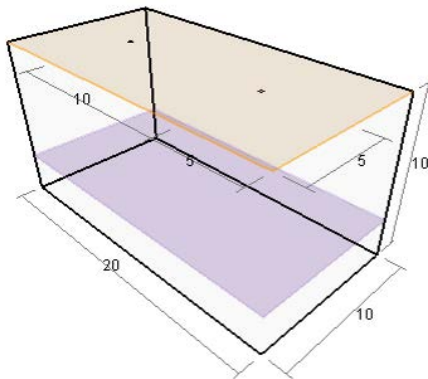

Average Illuminance: 25 fc
Number of Luminaires: 2
Workplane Height: 2.5 ft

OPTIONAL ACCESSORIES



Microwave Sensor 120/277V
(stand-alone)
Order Code: 11638



Right Angle
Connector
Order Code: 11820



4ft Wireguard
Order Code: 11821



4ft Replacement Lens
Order Code: 11737



Remote Control for
Microwave Sensor*
Order Code: 11683



Row Connector
Order Code: 11819

*Note: 11683 - one remote control
for multiple sensors.

Easily access our DLC qualified products with rebates in your area.

ACCESS IT HERE: [Rebate Finder](#)

www.earthtronics.com/rebate-finder/catalog/

