

Project	
Date	
Prepared By	
Model #	WPA120WSCCTBK5

Specifications

ELECTRICAL

Watts: 72, 96, 120
Voltage: 120-347VAC
Power Factor: >0.9
Operating Temp. Range:
-40°F (-40°C) to 113°F (50°C)

LIGHT

Lumens:
9360, 12480 or 15600
Color Temperature: 3000K,
4000K or 5000K
CRI: 80+

AGENCY APPROVALS

UL: Yes
IP65: Yes
DLC® Premium: Yes

PRODUCT DETAILS

Finish Color: Bronze

Lens: Polycarbonate, Anti-UV
Warranty: 5 years
Fixture
Rated Life: 50,000 hours
Lumen Maintenance:
L70 at 60,000 hrs (90°C)
Weight: 12.35 LBS
Dimensions:
10.51" L x 5.78" W x 12.85" H

LED Adjustable Slim Wall Pack

Color and Wattage Selectable



ORDER CODE:

11628

MODEL NUMBER:

WPA120WSCCTBK5

COLOR SELECTABLE:

3000K, 4000K, 5000K

LUMEN LEVEL:

9360 lumens - 72 watts
12480 lumens - 96 watts
15600 lumens - 120 watts

DLC® PRODUCT ID:

PL2L9E73LCKN

REBATE AVAILABILITY*

PRODUCT DESCRIPTION

The EarthTronics LED Adjustable Wall Pack has a slim profile design. It can be locked into any angle ranging from 0° to 90° providing exterior security illumination where required. The durable die cast aluminum housing is powder coated to maintain the fixture appearance for several years. Select from 3000K, 4000K or 5000K color temperatures as well as 9360, 12480 or 15600 lumen levels, this is easily done by the dial switch located on the side of the product. It features a high 80+ CRI providing an excellent light source for nearly any task. The polycarbonate lens provides durability and resistance impact, and the conduit entry points allow direct wall or junction box mounting. These adjustable wall pack fixtures feature 120-277V universal voltage. This fixture can withstand the elements, it's made to last in the outdoors with the IP65 rating and a minimum start temperature of -40°F. They are equipped with a 0 - 10-volt continuous dimming driver with a dimming range capability of 10% to 100%. The long 50,000-hour life is backup with a 10 year limited warranty. The wall pack fixture requires a properly anchored UL recognized junction box for proper installation. Photocell for dusk to dawn operation is installed in this fixture. Night Sky Complaint. DLC® listed product.

PRODUCT FEATURES

- + Select from 3000K, 4000K & 5000K
- + Wattage selectable: 72, 96, 120
- + Universal Voltage 120-347VAC
- + Adjustable 0-90°
- + Durable die cast aluminum housing
- + 0-10V continuous dimming driver
- + Dimming range of 10% to 100%
- + Sealed to and tested for IP65
- + Factory preset to maximum wattage, 5000K
- + Photocell installed for dusk to dawn
- + Night Sky Complaint
- + DLC® Technical Requirement 5.1

APPLICATIONS

- + Signs
- + Landscaping Lighting
- + Parking Lots
- + Campuses
- + Architectural Lighting
- + Security Lighting
- + Parking Garages
- + Gas Stations
- + Commercial Lighting

Please consult installation instructions for proper application and use of this fixture.

*Rebate availability access it here: www.earthtronics.com/rebate-finder

PACKAGE DETAILS

INDIVIDUAL PACKAGE

Individual Carton Qty: 1

Dimensions:

11.81" L x 6.30" H x 14.17" W

Weight: 14.55 LBS

UPC: 840791116289

MASTER CARTON

Individual Carton Qty: 2


Dimensions:

13.39" L x 12.40" H x 14.96" W


Weight: 29 LBS

UPC: 84079111628900

PRODUCT VIEWS

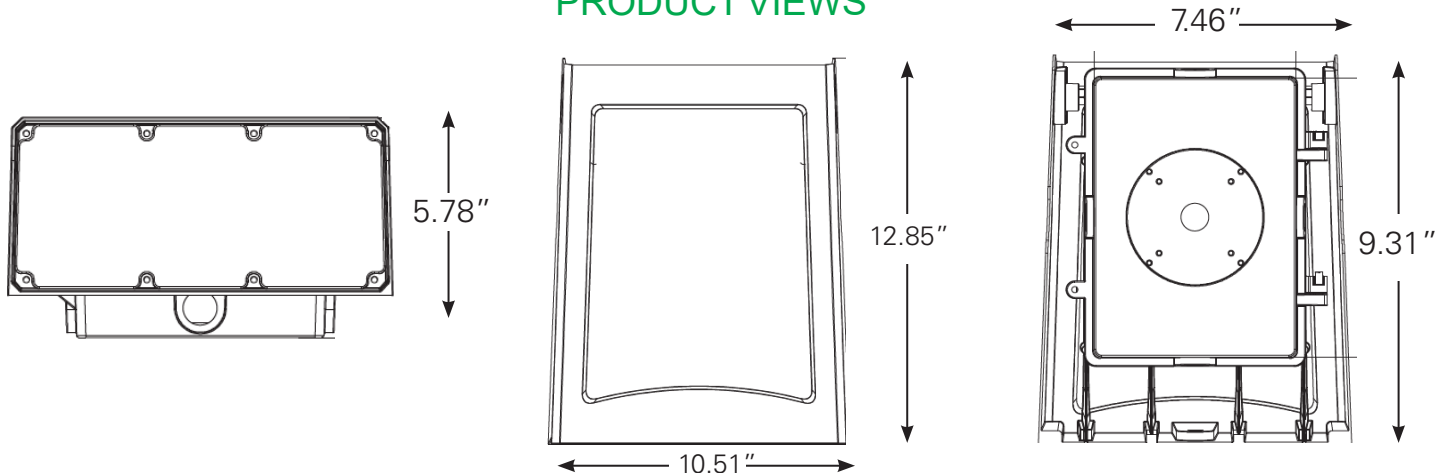

LIGHT DISTRIBUTION CURVE

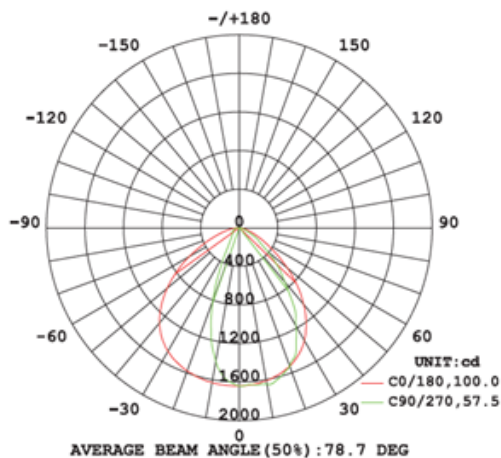

Easily access our DLC qualified products with rebates in your area.

ACCESS IT HERE: [Rebate Finder - LED Slim Wall Pack](#)

www.earthtronics.com/rebate-finder/catalog/

