

| | |
|-------------|---------------|
| Project | |
| Date | |
| Prepared By | |
| Model # | LTF1X4WSCCTD5 |

Specifications

ELECTRICAL

Watts: 20, 25 or 30
Voltage: 120-347VAC
Power Factor: 0.9
Operating Temp. Range:
-20°C (-4°F) to 50°C (122°F)

LIGHT

Lumens:
2500, 3125 or 4250
Color Temperature:
3500K, 4000K, 5000K
CRI: 82
Dimming: 0-10V

AGENCY APPROVALS


UL/FCC: Yes, UL1598
Ratings: Type IC
DLC® Premium: Yes

PRODUCT DETAILS

Lens: Acrylic
Warranty: 5 years
Fixture Rated Life:
50,000 hours Lumen
Maintenance:
L92 at 50,000hrs (58°C)
Rated Life: 50,000 hrs.
Weight: 15.18 LBS
Dimensions:
47.76"L x 23.78"W x 2.76"H

LED Troffer 1x4

Lumen, Color and Wattage Selectable



ORDER CODE:

11672

MODEL NUMBER:

LTF1X4WSCCTD5

COLOR SELECTABLE:

3500K / 4000K / 5000K

LUMEN LEVEL:

2500 lumens - 20 watts
3125 lumens - 25 watts
3750 lumens - 30 watts

DLC® PRODUCT ID:

S-R0QE4Z

REBATE AVAILABILITY*

PRODUCT DESCRIPTION

EarthTronics LED Troffer fixture features the architectural basket lens design within a slim profile fixture that easily installs in 1x4 ceiling grid systems. Select from 3500K, 4000K or 5000K color temperatures as well as 2500, 3125 or 3750 lumen levels. The basket lens is held securely in place and provides even light distribution. The fixture is complete with T-bar hanger clips satisfying earthquake requirements and providing a secure installation. The solid state driver delivers long life without the flicker associated with fluorescent lighting products. These Troffers feature 120-347V dual wattage operation. They are equipped standard with a 0 - 10 volt continuous dimming driver with a dimming range capability of 10% to 100%. Ideal for construction, renovation and retrofit commercial applications. DLC® Premium listed product.

PRODUCT FEATURES

- + Color selectable: 3500K, 4000K, 5000K
- + Wattage selectable: 20, 25, 30
- + Standard 120-347V
- + 0-10V dimming provides for smooth control of light levels
- + DLC® Technical Requirement 5.1
- + Basket lens is securely mounted
- + Easily installs in drop ceiling T-bar grids
- + Earthquake clips are integral to the frame
- + Fixture is made from high strength light weight steel
- + Finish is a high reflectivity white


APPLICATIONS

- + Office
- + Healthcare Facilities
- + New Construction
- + Commercial
- + Industrial

Please consult installation instructions for proper application and use of this fixture.

*Rebate availability access it here: www.earthtronics.com/rebate-finder

PRODUCT DIMENSIONS

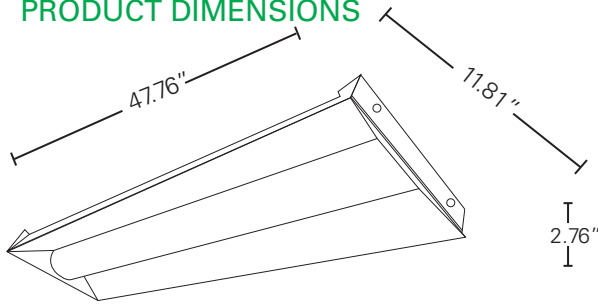

PACKAGE DETAILS


Dimensions:

48.82" Length x 12.6" Width x 3.15" Height

Weight: 12.54 LBS

UPC: 840791116722

LIGHT DISTRIBUTION CURVE

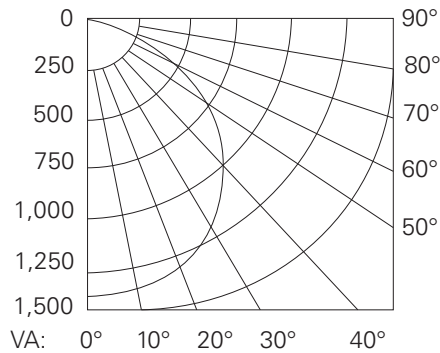


Average Illuminance: 49 fc



Number of Luminaires: 10

Workplane Height: 2.5 ft


LIGHTING LAYOUT

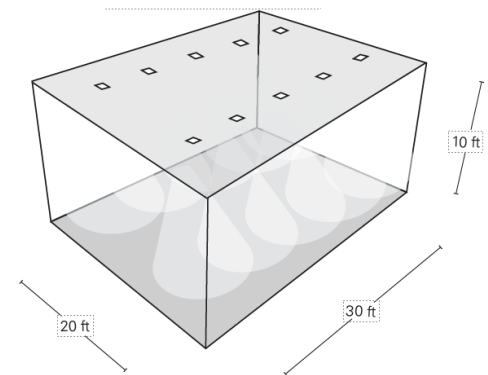

OPTIONAL ACCESSORIES

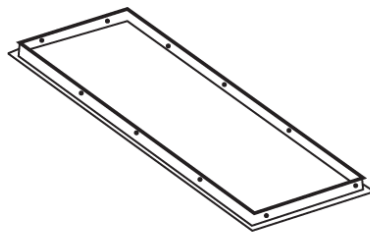

Recessed Drywall Kit
Order Code: 11103

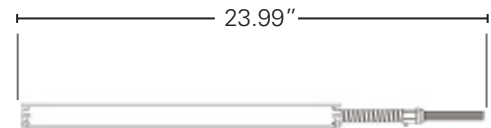

External Emergency
Backup Unit
Order Code: 11469

Easily access our DLC qualified products with rebates in your area.

ACCESS IT HERE: [Rebate Finder - LED Troffer](#)

www.earthtronics.com/rebate-finder/catalog/

