

Project	
Date	
Prepared By	
Model #	LTF2X2WSCCTD5

## Specifications

### ELECTRICAL

Watts: 20, 25 or 30  
Voltage: 120-347VAC  
Power Factor: 0.9  
Operating Temp. Range:  
-20°C (-4°F) to 50°C (122°F)

### LIGHT

Lumens:  
2500, 3125 or 3750  
Color Temperature: 3500K,  
4000K, 5000K  
CRI: 82

### AGENCY APPROVALS


UL/FCC: Yes, UL1598  
Ratings: Type IC  
DLC® Premium: Yes

### PRODUCT DETAILS

Lens: Acrylic  
Warranty: 5 years  
Fixture  
Rated Life: 50,000 hours  
Lumen Maintenance: L70  
at 100,000 hrs (70°C)  
Weight: 9.91 LBS  
Dimensions:  
23.78"L x 23.78"W x 2.76"H

# LED Troffer 2x2

## Color and Wattage Selectable



### PRODUCT DESCRIPTION

EarthTronics LED Troffer fixture features the architectural basket lens design within a slim profile fixture that easily installs in 2x2 ceiling grid systems. Select from 3500K, 4000K or 5000K color temperatures as well as 2500, 3125 or 3750 lumen levels. The basket lens is held securely in place and provides even light distribution. The fixture is complete with T-bar hanger clips satisfying earthquake requirements and providing a secure installation. The solid state driver delivers long life without the flicker associated with fluorescent lighting products. These Troffers feature 120-347V dual voltage operation. They are equipped standard with a 0 - 10 volt continuous dimming driver with a dimming range capability of 10% to 100%. Ideal for construction, renovation and retrofit commercial applications. An optional factory installed microwave occupancy sensor with timed delay and step dimming functions is available. A remote control is available to easily adjust sensor settings. DLC® Premium listed product.

### PRODUCT FEATURES

- + Color selectable: 3500K, 4000K, 5000K
- + Wattage selectable: 20, 25, 30
- + Standard 120-347V
- + 0-10V continuous dimming driver
- + Dimming range of 10% to 100%
- + Microwave occupancy sensor available
- + Basket lens is securely mounted
- + Easily installs in drop ceiling T-bar grids
- + Factory preset to maximum wattage, 4000K
- + L70 at 100,000 hours (70°C)
- + DLC® Technical Requirement 5.1

### APPLICATIONS

- + Office
- + Healthcare Facilities
- + New Construction
- + Commercial
- + Industrial

Please consult installation instructions for proper application and use of this fixture.  
\*Rebate availability access it here: [www.earthtronics.com/rebate-finder](http://www.earthtronics.com/rebate-finder)

### ORDER CODE:

11670

### MODEL NUMBER:

LTF2X2WSCCTD5

### COLOR SELECTABLE:

3500K / 4000K / 5000K

### LUMEN LEVEL:


2500 lumens - 20 watts  
3125 lumens - 25 watts  
3750 lumens - 30 watts

### DLC® PRODUCT ID:

S-5GZ0LV

### REBATE AVAILABILITY\*

## PRODUCT DIMENSIONS

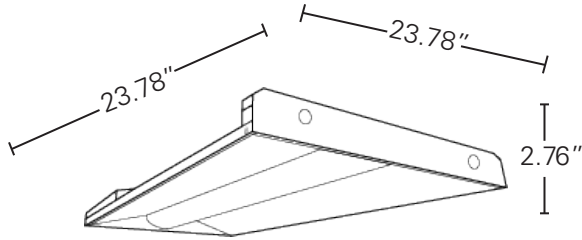

## PACKAGE DETAILS

Carton Qty: 2


Dimensions:

24.17" Length x 24" Width x 4.61" Height

Weight: 15.12 LBS

UPC: 840791116708

## LIGHT DISTRIBUTION CURVE



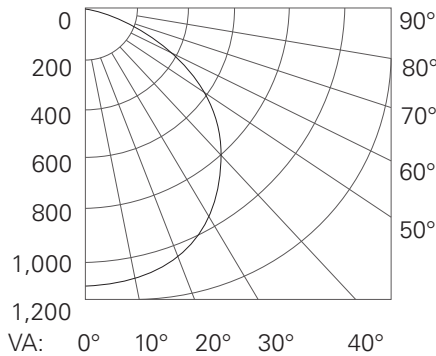


Average Illuminance: 49 fc

Number of Luminaires: 10


Workplane Height: 2.5 ft

## LIGHTING LAYOUT

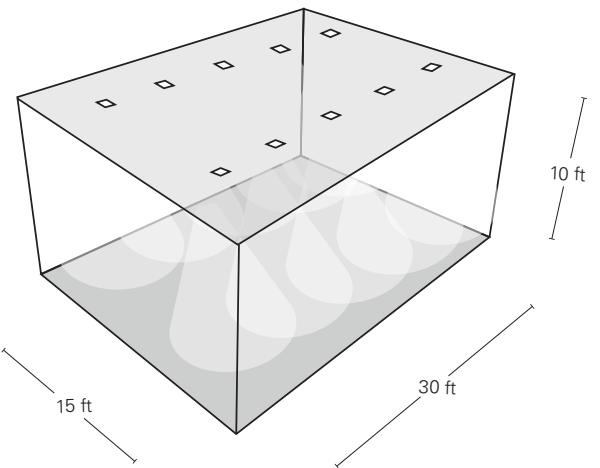

Recessed Drywall Kit  
Order Code: 11101

## OPTIONAL ACCESSORIES

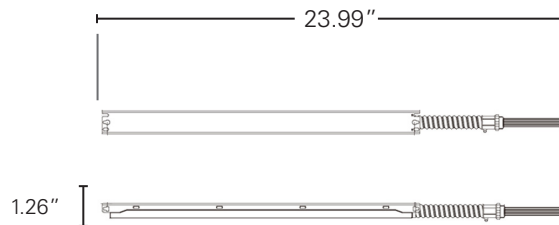

External Emergency Backup Unit  
Order Code: 11469

Easily access our DLC qualified products with rebates in your area.

ACCESS IT HERE: [Rebate Finder - LEDTroffer](http://www.earthtronics.com/rebate-finder/catalog/)

[www.earthtronics.com/rebate-finder/catalog/](http://www.earthtronics.com/rebate-finder/catalog/)

