

Project	
Date	
Prepared By	
Model #	FL70CCTBK5

Specifications

ELECTRICAL

Watts: 70

Voltage: 120-347VAC

Power Factor: 0.9 THD:
20%

Operating Temp. Range:
-40°F to 131°F

LIGHT

Initial Lumens: 9500

Lumens per Watt: 135

Color Temperature:
3000K, 4000K and 5000K

CRI: 80

AGENCY APPROVALS

cUL: Yes

UL: Yes

RoHS: Yes

DLC® Premium: Yes

IP65 Rated: Yes

PRODUCT DETAILS

Lens: Acrylic

Warranty: 5 years

Fixture

Rated Life: 50,000 hours

LED Floodlight

Color & Wattage Selectable



ORDER CODE:

11335

MODEL NUMBER:

FL70CCTBK5

COLOR SELECTABLE:

3000K, 4000K, 5000K

LUMEN LEVEL:

9500 lumens - 70 watts
8550 lumens - 63 watts
7600 lumens - 56 watts
6650 lumens - 49 watts

DLC® PRODUCT ID:

PLNJ7C9AWZH1

REBATE AVAILABILITY*

PRODUCT DESCRIPTION

The EarthTronics LED Floodlight provides security and general area illumination directed where required. It has textured architectural bronze powder coat finish with high impact acrylic lens. Switch between 3000K, 4000K and 5000K easily at the time installation. This 70 watt floodlight has the capability to adjust the wattage from 70 watt down to 49 watts, which gives you flexibility to insure the correct light level and color temperature. It operates at 135 lumens per watt efficiency. Also, adjust the lumen levels by using the percentages noted on the dip switch. This fixture also has a pre-installed photocell. Accepts 120 – 347 volt AC power supply. The long 50,000 hour is backed up with a 5 year warranty. DLC® Premium listed product.

PRODUCT FEATURES

- + Color selectable: 3000K, 4000K, 5000K
- + Wattage selectable: 70, 63, 56 or 49 watt
- + 120-347 VAC 50-60Hz
- + 50,000 hour rated life
- + 5 year warranty, 10 year limited
- + Easy installation
- + Wide flood 150° beam angle (10%)
- + Ships standard with knuckle joint
- + Knuckle is available
- + Factory preset at max. wattage 5000K


APPLICATIONS

- + Commercial Building
- + Advertising Lighting
- + Landscape Lighting


Please consult installation instructions for proper application and use of this fixture.

*Rebate availability access it here: www.earthtronics.com/rebate-finder

PRODUCT DIMENSIONS

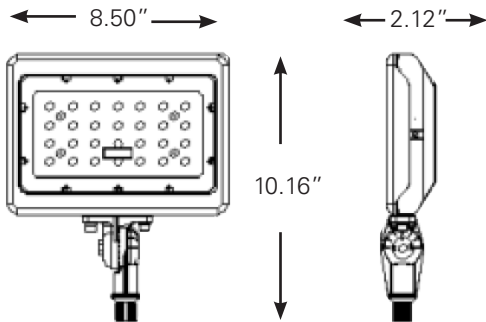

LIGHT DISTRIBUTION CURVE

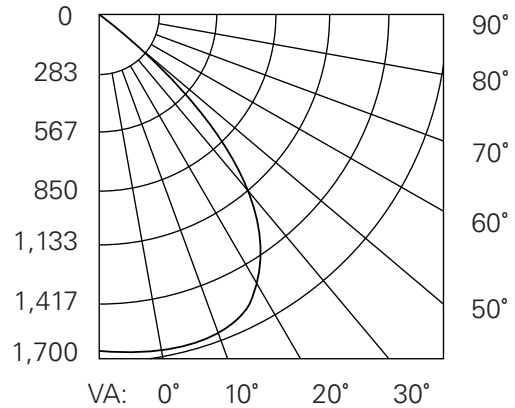

PACKAGE DETAILS

INDIVIDUAL PACKAGE

Individual Carton Qty: 1

Dimensions:

11.06" Length x 9.25" Width x 2.75" Depth

Weight: 2.87 LBS

UPC: 840791113356

MASTER CARTON

Master Carton Qty: 6


Dimensions:

19.05" Length x 11.88" Width x 11.69" Height

Weight: 26.89 LBS

UPC: 84079111335600

COLOR, WATTAGE & PHOTOCELL SWITCHES

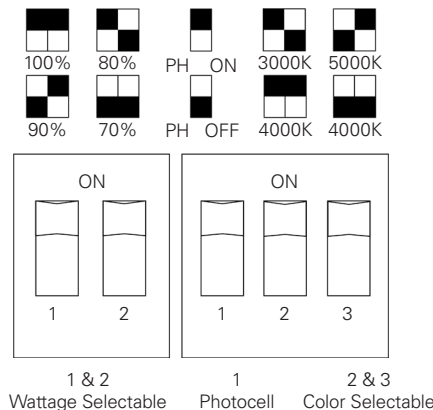

OPTIONAL ACCESSORIES



Yoke Mount
Order Code: 11339

Easily access our DLC qualified products with rebates in your area.

ACCESS IT HERE: [Rebate Finder - LED Floodlight](#)

www.earthtronics.com/rebate-finder/catalog/

