

Project	
Date	
Prepared By	
Model #	WPTWS40CCTBK5

## Specifications

### ELECTRICAL

Watts: 20, 30, 40

Voltage: 120-347VAC

Power Factor: >0.9

Operating Temp. Range:

-40°F to 104°F

### LIGHT

Initial Lumens: 2700

Lumens per Watt: 135

Color Temperature:

3000K, 4000K, 5000K

CRI: >80

### AGENCY APPROVALS

UL/cUL: Yes

RoHS: Yes

DLC® Premium: Yes

### PRODUCT DETAILS

Cover: Glass

Warranty: 5 years

Fixture Rated Life:

50,000 hours

Weight:

8.6 lbs

Dimensions:

4.8" L x 12.8" W x 10.2" D

# LED Wall Pack - Traditional

Watt and CCT Selectable, 120-347V  
 Complete with Photocell



**ORDER CODE:** 11864

**MODEL NUMBER:**

WPTWS40CCTBK5

**WATTS / LUMENS**

20      2700

30      4050

40      5400

**COLOR SELECTIONS**

3000K, 4000K, 5000K

**DLC® PRODUCT ID:**

S-X3FUH4

**\*Rebate Availability**

## PRODUCT DESCRIPTION

EarthTronics Traditional LED Wall Packs features three color selectable operations. Switch between 3000K, 4000K and 5000K easily at the time installation. The LED Traditional Style Wall Pack uses industry leading LED chips and drivers to deliver a quality, energy saving lighting solution. The color selectable temperatures offer building managers the opportunity to match existing HID lamps and to reduce the blue light spectrum often associated with higher color temperatures. Each of the EarthTronics Wall Packs accepts 120-347 Volt AC power supply. The wall packs provide more than 135 lumens per watt and a high 80+ CRI for improved visual acuity and efficient performance. The design is built to withstand all climates and allows for an extreme temperature range, even operating down to -40 degrees F°, and is IP65 approved for outdoor wet applications. With rated life of 50,000 hours, this wall pack series is designed for easy installation, directly fitting onto existing electrical boxes, making it the contractors choice when replacing older high-pressure sodium and metal halide wall packs. DLC® Premium.

## PRODUCT FEATURES


- + Select from 3000K, 4000K, and 5000K
- + 120° light pattern provides for wide flood distribution
- + Built in Photocell
- + IP65 rated for outdoor use
- + L70 > 100,000 hrs
- + DLC® Premium
- + Tempered and impact resistant clear prismatic borosilicate glass lens
- + Die cast housing provides long life in commercial installations
- + Night Sky Compliant on 3000K, 4000K and 5000K
- + Reduces sky glow on 3000K only
- + Operates on 120-347VAC, which includes: 120, 208, 240, 277, and 347VAC

## APPLICATIONS

- + Commercial Building
- + Industrial
- + Municipal Facilities

Please consult installation instructions for proper application and use of this fixture.  
 \*Rebate availability access it here: [www.earthtronics.com/rebate-finder](http://www.earthtronics.com/rebate-finder)

## PRODUCT DIMENSIONS

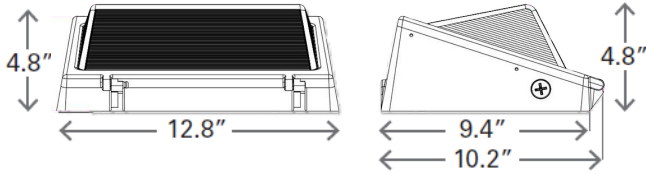



## INDIVIDUAL PACKAGE

Individual Package Qty: 1  
Dimensions: 15" x 7" x 11.8" inches  
Wgt: 9 lbs

## MASTER CARTON DETAILS

Master Carton Qty: 2  
Master Carton Dimensions: 16" x 10" x 12 inches  
Wgt: 10 lbs

## PRODUCT VIEWS

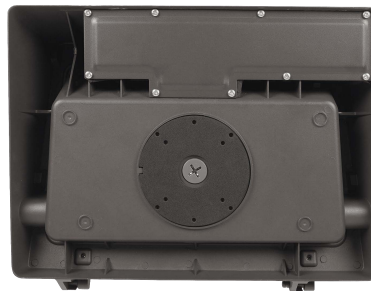

\*Remove glass cover to select desired color temperature and wattage.

Easily access our DLC qualified products with rebates in your area.

ACCESS IT HERE: [Traditional LED Wall Pack](#)

[www.earthtronics.com/rebate-finder/catalog/](http://www.earthtronics.com/rebate-finder/catalog/)

