



EarthTronics[®]

PRODUCT CATALOG

LED LIGHTING FIXTURES

2023

TABLE OF CONTENTS

LED INDOOR FIXTURES 3 - 15

LED OUTDOOR FIXTURES 16 - 21

EarthTronics is an LED lighting product manufacturer and supplier dedicated to developing innovative energy-efficient lighting products that provide a positive economic and environmental impact for our customers. We sell to lighting and electrical distributors, commercial and residential contractors, energy management companies and more.

Since 2007, we have been at the cutting edge of LED products. Our home resides in Norton Shores, MI, but we can be found anywhere you need a little light.

Where Efficiency Meets Innovation



Linear Highbay Premium

This fixture's lightweight and compact design is great for warehouse and manufacturing applications.



VOLTAGE

120/277V

WATTAGE

92W up to 270W

LUMENS

14000 up to 40500

COLORS

5000K

FEATURES

- + Lightweight, compact design
- + 6kV ANSI surge protection standard
- + PMMA lens
- + Durable steel housing
- + Up to 50° C true ambient temperature
- + Driver standard with 0-10V dimming (prewired)
- + Suitable for damp locations
- + Dimmable
- + 100,000 hrs rated life L70
- + VHook + chain included

COMPATIBLE

with EarthConnect®
Network Lighting Controls



Order Code	Model #	Length	Watts	CCT	Lumens
11685	HBL9250WH1	1.3ft	92W	5000K	13800LM
11687	HBL13550WH1	1.3ft	135W	5000K	20250LM
11689	HBL1855WH1	1.9ft	185W	5000K	27750LM
11691	HBL27050WH1	2.6ft	270W	5000K	40500LM

Optional Accessories

Pendant Mount and Surface Mount Kits, Wire Guards, PIR Sensor (stand-alone), Emergency Back-Up Driver, 6ft Cord are available.

UFO Highbay

The UFO's simple and efficient design is great for warehouse and manufacturing applications.



2

Models.



VOLTAGE

120/277V

WATTAGE SELECTABLE

50W up to 240W

LUMENS

6750 up to 32400

COLOR SELECTABLE

3000K, 4000K, 5000K

FEATURES

- + Simple design
- + 3 CCT color selectable
- + 4-Stage brightness adjustment
- + Ship with standard 6' 18/3 SJT Whip
- + Corrosion resistance die-cast aluminum alloy
- + IP65 wet location rated
- + Polycarbonate lens is IK08 rated
- + 100,000 hrs rated life L80

COMPATIBLE

with EarthConnect®
Network Lighting Controls



Order Code	Model #	Watts Selectable	Lumens	CCT Selectable
11776	HBU150WSCCTB1	50W	6750	3000K
		80W	10800	4000K
		100W	13500	5000K
		150W	20250	
11777	HBU240WSCCTB1	150W	20250	3000K
		180W	24300	4000K
		200W	27000	5000K
		240W	32400	

***Mounting Hooks Included**
6ft 18/3 SJT Whip Included

Optional Accessories

Pendant and Trunnion Mounts, Wire Guards, PC Reflector, Emergency Back-up Driver, and Microwave Sensor (stand-alone) are available.

Washdown Highbay

The Washdown Highbay series is rated IP69K and ETL Sanitation Listed for use in food processing and clean room applications.



VOLTAGE

120/277V

WATTAGE SELECTABLE

100W/150W/200W

LUMENS

15000 up to 30000

COLORS

5000K

FEATURES

- + 3-Stage brightness adjustment
- + 0-10V dimming (prewired)
- + NSF Std. rated (for food safety)
- + IP69K rated for Pressure Washdown
- + 4kV surge protection built in
- + Polycarbonate lens, shatter proof, stronger than glass
- + Suitable for damp locations
- + Durable and corrosion Resistant powder coat finish

COMPATIBLE

with EarthConnect®
Network Lighting Controls



Order Code	Model #	Watts Selectable	CCT	Lumens
11851	HBWWS50WH1	100W, 150W, or 200W	5000K	15000 22500 30000


Optional Accessories

12VDC Microwave Motion Sensor (stand-alone) and Sensor Remote Control are available.

*Note: Only 1 remote control for use with multiple sensors.

Back-Light Panel

Color and Wattage Selectable.

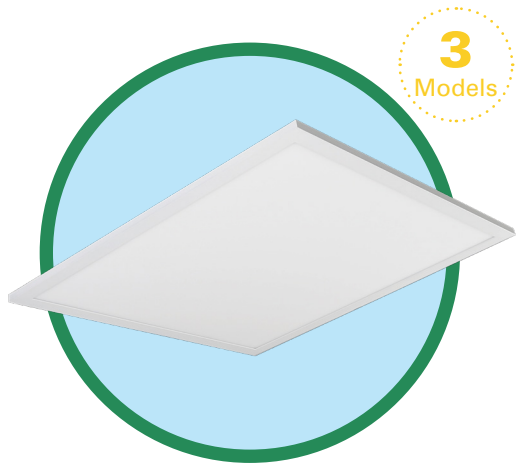

3

Models

VOLTAGE

120/277V

WATTAGE SELECTABLE

20W up to 45W

LUMENS

2200 up to 5000

COLOR SELECTABLE

3500K, 4000K, 5000K

FEATURES

- + 3 CCT color selectable
- + Direct illumination provides true color over the life of the product
- + Integral LED lens is constructed from PMMA and provides even illumination across the face of the panel
- + Stamped steel LED housing is part of a rigid fixture design
- + Fixture interior painted white for over 96% reflectivity
- + Contractor friendly junction box for easy installation
- + 0-10V dimming is standard

COMPATIBLE

with EarthConnect®
Network Lighting Controls



Order Code	Model #	Watts Selectable	Lumens	CCT Selectable
11497 1x4	LDFFP1X4WSCCTD1	20W	2200	3500K
		30W	3300	4000K
		35W	4000	5000K
11496 2x2	LDFFP2X2WSCCTD1	20W	2200	3500K
		30W	3300	4000K
		35W	4000	5000K
11498 2x4	LDFFP2X4WSCCTD1	30W	3300	3500K
		35W	4000	4000K
		45W	5000	5000K


Optional Accessories

Emergency Back-up Driver
Surface mount kits available

For more information please refer to our specification sheets on www.EarthTronics.com

VaporTight

This vapor tight fixture is ideal for commercial and industrial environments where water, humidity and dust may occur.

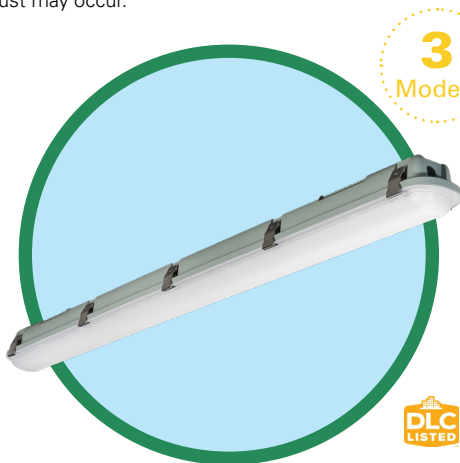

3

Models



VOLTAGE

120/277V

WATTAGE SELECTABLE

15W up to 90W

LUMENS

1950 up to 11700

COLOR SELECTABLE

3500K, 4000K, 5000K

FEATURES

- + 3-Stage brightness adjustable
- + 3 CCT color selectable
- + The lens and LED module board are integrated
- + 5VA housing, the highest classification in the UL94 Standard
- + Driver standard with 0-10V dimming (prewired)
- + Latches are stainless steel
- + The polycarbonate housing has stainless steel latches, and the lens are sealed to and tested for IP65
- + Dimmable
- + 100,000 hours rated life L70

COMPATIBLE

with EarthConnect®
Network Lighting Controls



Order Code	Model #	Length	Watts Selectable	CCT Selectable	Lumens
11844	LVT2WSCCTD1S	2ft	15W, 20W, or 25W	3500K, 4000K, or 5000K	1950LM 2600LM 3250LM
11845	LVT4WSCCTD1S	4ft	34W, 38W, or 45W	3500K, 4000K, or 5000K	4420LM 4940LM 5850LM
11846	LVT8WSCCTD1S	8ft	65W, 75W, or 90W	3500K, 4000K, or 5000K	8450LM 9750LM 11700LM

Optional Accessories

Emergency Back-up Driver, Microwave, Occupancy Sensor (stand-alone), Sensor Remote Control are available.

For more information please refer to our specification sheets on www.EarthTronics.com

Strip Light

This Strip Light is great for general lighting and manufacturing applications.



3
Models

VOLTAGE

120/277V

WATTAGE SELECTABLE

15W up to 90W

LUMENS

1950 up to 11700

COLOR SELECTABLE

3500K, 4000K, 5000K



FEATURES

- + 3-Stage brightness adjustable
- + 3 CCT color selectable
- + Frost polycarbonate lens sealed and tested for IP65
- + Driver standard with 0-10V dimming (prewired)
- + The luminous part can be easily removed when install EM or sensor
- + Luminous part is integrated and fastened to fixture body by snap-locks
- + End-caps adopt integrated bending technique
- + Faster surface mounting or row mounting
- + UL 1598 damp and dry locations
- + Dimmable
- + 100,000 hours rated life L70

COMPATIBLE

with EarthConnect®
Network Lighting Controls




Order Code	Model #	Length	Watts Selectable	CCT Selectable	Lumens
11840	LST2WSCCTD1S	2ft	15W, 20W, or 25W	3500K, 4000K, or 5000K	1950LM 2600LM 3250LM
11842	LST4WSCCTD1S	4ft	22W, 28W, or 40W	3500K, 4000K, or 5000K	2860LM 3640LM 5200LM
11843	LST8WSCCTD1S	8ft	65W, 75W, or 90W	3500K, 4000K, or 5000K	8450LM 9750LM 11700LM

Optional Accessories

Emergency back-up Driver, Microwave, Occupancy Sensor (stand-alone), Wire Guards, Connectors, Remote Control are available.

Wrap Light

The Wrap Light fixture is the perfect solution for offices, stairways, bathrooms, and storage areas.

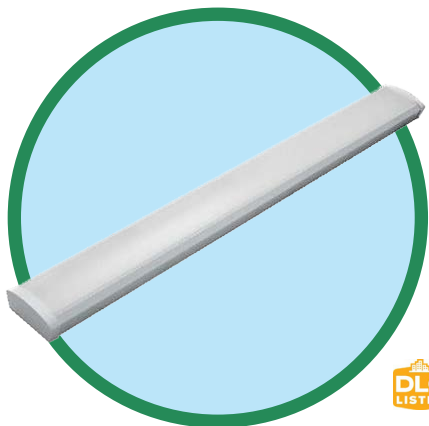

VOLTAGE

120/277V

WATTAGE SELECTABLE

32W/40W/48W

LUMENS

3680 up to 5520

COLOR SELECTABLE

3500K, 4000K, 5000K

FEATURES

- + 3-Stage brightness adjustable
- + 3 CCT color selectable
- + Driver standard with 0-10V dimming (prewired)
- + UL 1598 damp and dry locations
- + Dimming range 10% to 100%
- + Steel housing with a white finish

Order Code	Model #	Length	Watts Selectable	CCT Selectable	Lumens
11608	LW4WSCCTD1	4ft	32W, 40W, or 48W	3500K, 4000K, or 5000K	3680LM 4600LM 5520LM

LED Troffers

LED Troffers are ideal for construction, renovation, and retrofit commercial applications.



3
Models



VOLTAGE

120/277V

WATTAGE SELECTABLE

20W up to 34W

LUMENS

2500 up to 4250

COLOR SELECTABLE

3500K, 4000K, 5000K

FEATURES

- + 3-Stage brightness adjustable
- + 3 CCT color selectable
- + 0-10V dimming
- + Dimming range of 10% to 100%
- + Basket lens is securely mounted
- + Easily installs in drop ceiling T-Bar grids
- + Earthquake clips are integral to the frame
- + UL 1598 for dry and damp locations

COMPATIBLE

with EarthConnect®
Network Lighting Controls



Order Code	Model #	Sizes	Watts Selectable	CCT Selectable	Lumens
11672	LTF1X4WSCCTD5	1x4	20W, 25W, or 30W	3500K, 4000K, or 5000K	2500LM 3125LM 3750LM
11604	LTF2X2WSCCT1	2x2	20W, 25W, or 30W	3500K, 4000K, or 5000K	2500LM 3125LM 3750LM
11605	LTF2X4WSCCT1	2x4	25W, 30W, or 34W	3500K, 4000K, or 5000K	3125LM 3750LM 4250LM


Optional Accessories

PIR Sensor (stand-alone), Emergency Back-up Driver, and Recessed Drywall Kit are available

Square Canopy

The Square Canopy is ideal for parking garages and warehouses.

2
Models

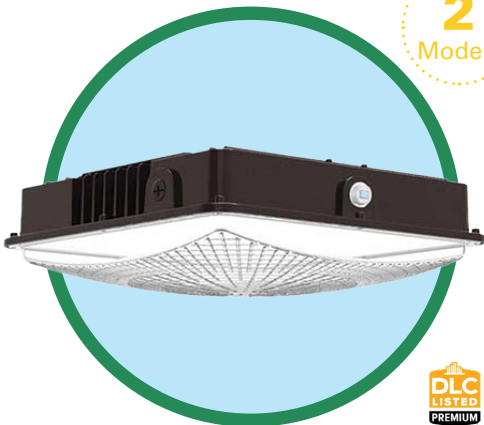

VOLTAGE

120/277V

WATTAGE SELECTABLE

30W up to 120W

LUMENS

3900 up to 15600

COLOR SELECTABLE

3000K, 4000K, 5000K

FEATURES

- + 3-Stage brightness adjustable
- + 3 CCT color selectable
- + 0-10V dimming
- + Dimming range of 10% to 100%
- + IP65 wet location rated, UL listed
- + 4K surge protector
- + Various mounting capabilities

COMPATIBLE

with EarthConnect®
Network Lighting Controls



Order Code	Model #	Watts Selectable	CCT Selectable	Lumens
11625	CA50WSCCTBK1	30W, 40W, or 50W	3000K, 4000K, or 5000K	3900LM 5200LM 6500LM
11626	CA120WSCCTBK1	72W, 96W, or 120W	3000K, 4000K, or 5000K	9300LM 12400LM 15600LM

Round Canopy

The Round Canopy is ideal for parking garages and warehouses.



3
Models



VOLTAGE

100-347V

WATTAGE

40W, 60W, 100W

LUMENS

5400 up to 13750

COLOR SELECTABLE

3000K, 4000K, 5000K

FEATURES

- + Easy installation
- + 3 CCT color selectable
- + Durable cast aluminum housing
- + Built to withstand all climates and allows for a wide temperature range
- + -40°F to 131°F operating range
- + Directly fits onto existing electrical boxes
- + IP65 approved for outdoor wet applications, UL Listed
- + Full function microwave sensor available
- + Various mounting capabilities

COMPATIBLE

with EarthConnect®
Network Lighting Controls



Order Code	Model #	Watts	CCT Selectable	Lumens
11551	CA40CCTBK5	40W	3000K, 4000K, or 5000K	5400LM
11552	CA60CCTBK5	60W	3000K, 4000K, or 5000K	8100LM
11553	CA100CCTBK5	100W	3000K, 4000K, or 5000K	13750LM

Optional Accessories Microwave Motion Sensor and Sensor Remote Control are available.

Architectural LED Panel Light

Designed for easy installation in retrofit or new construction projects.



3

Models

VOLTAGE

120VAC

WATTAGE

11W, 14W, 19W

LUMENS

700 up to 1200

COLORS

3000K & 4000K

SIZES

5.5", 7", 9"
(Round or Square)

FEATURES


- + 3 sizes, round or square options
 - + Easy installation
 - + 3000K & 4000K color temperature
 - + Exceptional color rendering 80+ CRI
 - + 100% to 5% dimming range
 - + Smooth edgelit LED technology
 - + Wet location, perfect for shower applications
 - + 50,000 hour rated life
 - + Energy Star
 - + CLOSE-OUT
- While supplies last

Model #	Watts	Size	CCT	Lumens
MP01700305WH2	11W	5.5" Round	3000K	700LM
MP01700405WH2	11W	5.5" Round	4000K	700LM
MP02700305WH2	11W	5.5" Square	3000K	700LM
MP02700405WH2	11W	5.5" Square	4000K	700LM
MP01900307WH2	14W	7" Round	3000K	900LM
MP01900407WH2	14W	7" Round	4000K	900LM
MP02900307WH2	14W	7" Square	3000K	900LM
MP02900407WH2	14W	7" Square	4000K	900LM
MP011200309WH2	19W	9" Round	3000K	1200LM
MP011200409WH2	19W	9" Round	4000K	1200LM
MP021200309WH2	19W	9" Square	3000K	1200LM
MP021200409WH2	19W	9" Square	4000K	1200LM

For more information please refer to our specification sheets on www.EarthTronics.com

Commercial Downlight

Commercial Downlights are perfect for wet locations such as soffit and covered walkway installations, out of direct weather.

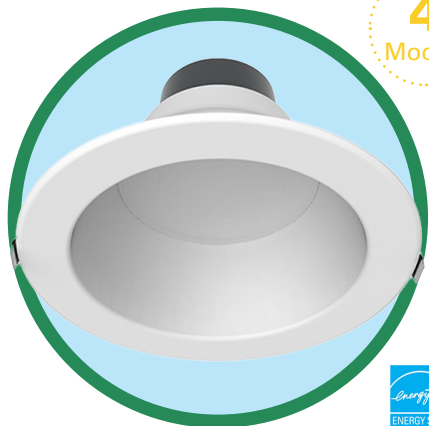

4
Models



VOLTAGE

120/277V

WATTAGE SELECTABLE

5W up to 32W

LUMENS

500 up to 3000

COLOR SELECTABLE

3000K, 3500K, 4000K

FEATURES

- + 3-Stage brightness adjustable
- + 3 CCT color selectable
- + 0-10V dimming
- + Dimming range of 10% to 100%
- + Architectural recessed lighting, easy installation
- + Durable aluminum housing with spring-loaded retention clips
- + New construction or in retrofit/renovation applications

COMPATIBLE

with EarthConnect®
Network Lighting Controls



Order Code	Model #	Watts Selectable	CCT Selectable	Lumens
11725	DL4WSCCTWH1	5W, 7W, or 12W	3000K, 3500K, or 4000K	500LM 700LM 1000LM
11418	DL6WSCCTWH1	7W, 10W, or 18W	3000K, 3500K, or 4000K	700LM 1000LM 1500LM
11419	DL8WSCCTWH1	10W, 15W, or 22W	3000K, 3500K, or 4000K	1000LM 1500LM 2000LM
11420	DL9WSCCTWH1	20W, 25W, or 32W	3000K, 3500K, or 4000K	2000LM 2500LM 3000LM

Optional Accessories

Goof Ring, T-Grid Plate, Joist Plate, and Emergency Back-up Driver are available

LED Disk Light

Disk Lights are ideal for tight spaces, such as, hallways, corridors, and closets.



VOLTAGE
120V

WATTAGE
12W and 15W

LUMENS
840 up to 1050

COLOR SELECTABLE
2700K up to 5000K

FEATURES

- + 5 CCT color selectable
- + Easily install over J-box or 4" and 6" downlight cans
- + Flexibility to install either with the E26 screw base connector (included) or hardwire directly to junction box
- + UL 1598 listed for dry and damp locations
- + Smooth dimming. dimmable down to 10%
- + Architectural recessed lighting

Order Code	Model #	Length	Watts	CCT Selectable	Lumens
11598	DK12CCT4WH2	4"	12W	2700K, 3000K, 3500K, 4000K, or 5000K	840LM
11600	DK15CCT6WH2	6"	15W	2700K, 3000K, 3500K, 4000K, or 5000K	1050LM

Optional Accessories Goof Ring and T-Grid Plate are available

LED Slim Downlight

The Slim Downlight's wafer-thin design allows this fixture to fit in tight spaces, even directly under the joist.



VOLTAGE
120V

WATTAGE
9W and 12W

LUMENS
650 and 850

COLOR SELECTABLE
2700K up to 5000K


FEATURES

- + 5 CCT color selectable
- + Easily install over J-box or 4" and 6" downlight cans
- + Edge-Lit LED technology provides even illumination
- + Easily installed in finished dry-wall or architectural tile ceiling in both commercial and residential applications where space is an issue
- + UL Wet Location rated for use in high humidity areas
- + Smooth dimming, dimmable down to 10%
- + Contemporary wafer-thin design

Order Code	Model #	Length	Watts	CCT Selectable	Lumens
11696	LSLIM4CCTWH2T	4"	9W	2700K, 3000K, 3500K, 4000K, or 5000K	650LM
11697	LSLIM6CCTWH2T	6"	12W	2700K, 3000K, 3500K, 4000K, or 5000K	850LM

Retrofit Downlight

Ideal for use in residential kitchen, bathroom, and family room applications. For commercial applications it provides a cost-effective lighting solution for offices, corridors and restrooms.

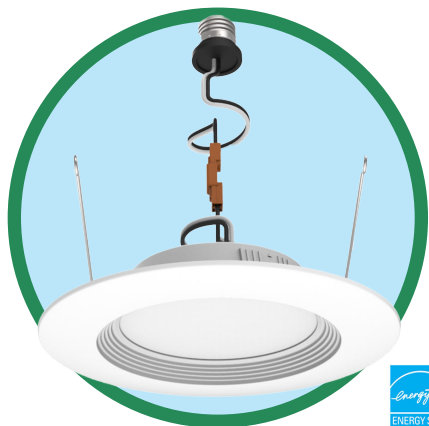

VOLTAGE

120V

WATTAGE

9W

LUMENS

850

COLOR SELECTABLE

2700K up to 5000K

FEATURES

- + 5 CCT color selectable
- + Kit easily converts for either 5"/6" aperture fixtures
- + Damp location rated
- + 120VAC, dimmable
- + Easily installs in recessed downlight cans with E26 screw base connector which is included
- + Damp location rated

Order Code	Model #	Length	Watts	CCT Selectable	Lumens
11726	LRT69CCTD	6"	9W	2700K, 3000K, 3500K, 4000K, or 5000K	850LM

LED Area Light

The Area Light is ideal for exterior illumination for commercial, industrial, and municipal facilities.

2
Models



VOLTAGE

120-347V

WATTAGE SELECTABLE

70W up to 300W

LUMENS

9100 up to 39000

COLOR SELECTABLE

3000K, 4000K, 5000K

FEATURES

- + 3 Stage brightness adjustment
- + 3 CCT color selectable
- + 0-10V dimming provides for smooth control of light levels
- + Dimming range of 10% to 100%
- + Corrosion resistant finish and screws
- + IP65 we location
- + Durable die-cast aluminum
- + Standard 6kV surge protector included (10kV available)
- + Changeable mount system

COMPATIBLE

with EarthConnect®
Network Lighting Controls



Order Code	Model #	Watts	CCT Selectable	Lumens
11765	AL150WSCCTBK5	70W, 100W, or 150W	3000K, 4000K, or 5000K	9100LM 13000LM 19500LM
11766	AL300WSCCTBK5	200W, 240W, or 300W	3000K, 4000K, or 5000K	26000LM 31200LM 39000LM

Optional Accessories

Slip Fitter, Universal Mount, Trunnion Mount, Yoke Mount, Replacement lens, Microwave Sensor and 10kV Surge Protector are available.

LED Floodlight

The LED Floodlight is perfect for outdoor lighting applications.

3
Models



VOLTAGE

100-277V

WATTAGE SELECTABLE

30W, 50W, 70W

LUMENS

650 and 850

COLOR SELECTABLE

3000K, 4000K, 5000K

FEATURES

- + 3 CCT color selectable
- + Textured architectural bronze powder coat finish with high impact acrylic lens
- + Dimming range of 10% to 100%
- + Architectural Recessed Lighting, Easy Installation
- + Reduces sky glow at 3000K

Order Code	Model #	Watts	CCT Selectable	Lumens
11333	FL30CCTBK1	30W	3000K, 4000K, or 5000K	3420LM
11334	FL50CCTBK1	50W	3000K, 4000K, or 5000K	5770LM
11335	FL70CCTBK5	49W, 56W, 63W, or 70W <small>*Wattage Selectable</small>	3000K, 4000K, or 5000K	6650LM 7600LM 8550LM 9500LM

Optional Accessories

Yoke Mounts are available.

LED Adjustable Wall Pack

The Adjustable Wall Pack is a great choice for outdoor applications and can withstand extreme weather climates.

2
Models



VOLTAGE

120-347V

WATTAGE SELECTABLE

30W up to 120W

LUMENS

3900 up to 15600

COLOR SELECTABLE

3000K, 4000K, 5000K



FEATURES

- + 3-Stage brightness adjustable
- + 3 CCT color selectable
- + Adjustable 0°-90°
- + Durable die-cast aluminum
- + 0-10v continuous dimming driver
- + Dimming range 0% to 100%

Order Code	Model #	Watts Selectable	CCT Selectable	Lumens
11627	WPA50WSCCTBK5	30W, 40W, or 50W	3000K, 4000K, or 5000K	3900LM 5200LM 6500LM
11628	WPA120WSCCTBK5	72W, 96W, or 120W	3000K, 4000K, or 5000K	9360LM 12480LM 15600LM

Traditional Wall Pack

This fixture replaces any wall pack and provides night sky compliance with a 3 CCT Color Selection.

2
Models



VOLTAGE

120-277V

WATTAGE

20W up to 100W

LUMENS

2700 up to 13500

COLOR SELECTABLE

3000K, 4000K, 5000K

FEATURES

- + 3 CCT color selectable
- + Night sky compliant and reduces sky glow at 3000K
- + Durable die-cast aluminum
- + 0-10v continuous dimming driver
- + Built in Photocell
- + Dimming range 0% to 100%
- + Tempered and impact resistant clear prismatic borosilcate glass lens
- + Operates down to -40°F
- + IP65 wet location rated

Order Code	Model #	Watts	CCT Selectable	Lumens
11864	WPTWS40CCTBK5	20W, 30W, or 40W	3000K, 4000K, or 5000K	2700LM 4050LM 5400LM
11865	WPTWS100CCTBK5	60W, 80W, or 100W	3000K, 4000K, or 5000K	8100LM 10800LM 13500LM

Mini Wall Pack

Mini Wall Packs provide exterior wide-flood area illumination for commercial, industrial, and municipal facilities.



VOLTAGE

120/277V

WATTAGE SELECTABLE

15W, 20W, 25W

LUMENS

1800 up to 3000

COLOR SELECTABLE

3000K, 4000K, 5000K

FEATURES

- + 3-Stage brightness adjustable
- + 3 CCT color selectable
- + Architectural bronze finish, anti-corrosion spray
- + Durable UV-stabilized PC lens resist corrosion and environmental conditions
- + Suited for wall mounting to provide a wide flood area
- + Dusk to dawn sensor is installed
- + IP65 for exterior, wet location use
- + Night sky compliant and reduces sky glow at 3000K
- + -40°F to 104°F operating range

Order Code	Model #	Watts Selectable	CCT Selectable	Lumens
11700	LWPMWSCCTBZ1	15W, 20W, or 25W	3000K, 4000K, or 5000K	1800LM 2400LM 3000LM

LED Yard Light

Yard Lights work from dusk to dawn giving out the perfect night illumination.



VOLTAGE

120/277V

WATTAGE SELECTABLE

36W, 49W, 60W

LUMENS

4500 up to 7500

COLOR SELECTABLE

3000K, 4000K, 5000K

FEATURES

- + 3-Stage brightness adjustable
- + 3 CCT color selectable
- + Available in bronze or gray finish
- + Built with an integrated photocell sensor feature that provides dusk to dawn operation
- + Polyester powder coat finish
- + Suitable for wall or pole mount applications
- + IP65 rated for wet locations, outdoor use
- + -40°F to 104°F operating range

Order Code	Model #	Color	Watts Selectable	CCT Selectable	Lumens
11698	LBWSCCTBZ1	Bronze	36W, 48W, or 60W	3000K, 4000K, or 5000K	4500LM 6000LM 7500LM
11699	LBWSCCTWH1	Gray	36W, 48W, or 60W	3000K, 4000K, or 5000K	4500LM 6000LM 7500LM



CONTACT US TO LEARN MORE



Toll Free: 866.632.7840



www.earthtronics.com



Email: contact@earthtronics.com

Scan for Online
Catalog



Easily access our DLC/ Energy Star qualified products with rebates in your area.
ACCESS IT HERE: [Rebate Finder](http://earthtronics.com/rebate-finder/catalog/) | earthtronics.com/rebate-finder/catalog/

For the most up to date specifications,
please visit earthtronics.com.
Specifications are subject to change.

