

Project	
Date	
Prepared By	
Model #	LT812CCTBEM

## Specifications

### ELECTRICAL

**Rated Lamp Power:** .5 watts

**Operating Power:** .5 watts

**System Power:** 1 .5 watts

**Voltage:** 120-277V

**Construction:** pipe

**Power Factor:** 0.5

**Instant Start Temp:** 0

**Minimum Temp:** 5 3

**Base Type:** 3

**Operation:** n

### LIGHT

**Lumens:** 000

**Lumens per Watt:** 13 .

**Color Temperature:**

field dustable 3500 000 or 5000

**CRI:** 8

**Beam Angle:** 300

### AGENCY APPROVALS

**UL 2:** es

**FCC:** art 5 class

**IEC 2:** Yes

### PRODUCT DETAILS

**Finish Type:** internal coated glass tube

**Coating:** full glass no aging allowing or ending

**Warranty:** 5 years


**Rated Hours:** 50 000

**RC**

**atts:** 3.5 watts 500 lumens

**recovery time:** 0 minutes

# pipe tube with emergency ac up or single end installation ballast pass

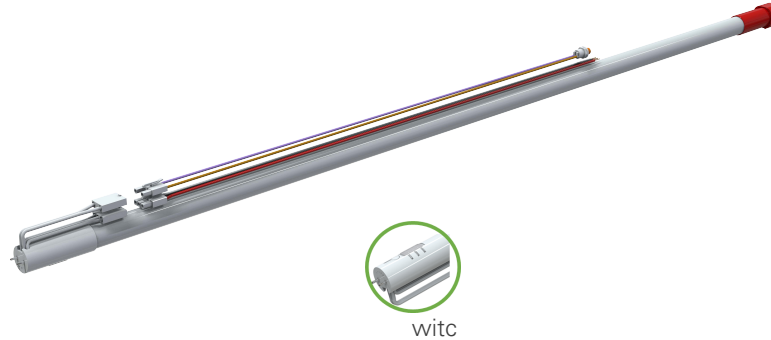

### ORDER CODE:

1 35

### MODEL NUMBER:

.5 watts

**L S:**

000

**C L R S L C L :**

3500 000 or 5000

## PRODUCT DESCRIPTION

EarthTronics pipe lamp is designed with an integrated emergency driver and eliminates the need for a separate emergency fixture. This .5 watt lamp is a replacement for a 3 watt fluorescent tube and provides 000 lumens. This pipe can be direct wired or ballast. This lamp is color selectable offering 3 choices 3500 000 or 5000 which can be adjusted in the field by sliding the switch to your desired color.


When in emergency mode the driver provides 0 minutes of ac up light producing 500 lumens at 3.5 watts. This provides exceptional lighting with reduced energy and maintenance costs. This lamp also works in dry or damp locations and enclosed fixtures.

The beam angle provides a wide distribution pattern and is perfect for directing more light to the working surface from existing troffer fixtures and strip fixtures as well as task and display lighting applications. Perfect for replacement of fluorescent tubes. This lamp is engineered for high lumen maintenance over its 50 000 hour rated. 0 operation.

## PRODUCT FEATURES

- + Easily retrofit T8, 4 foot tubes
- + Provides 2000 lumens
- + Single end wiring 0
- + Non-operation not or use with dimmers
- + Pipe Direct wire
- + Self-contained emergency driver supplies 0 minutes of illumination time
- + Suitable for dry or damp locations
- + Suitable for open or enclosed fixtures

## WIRING DIAGRAM

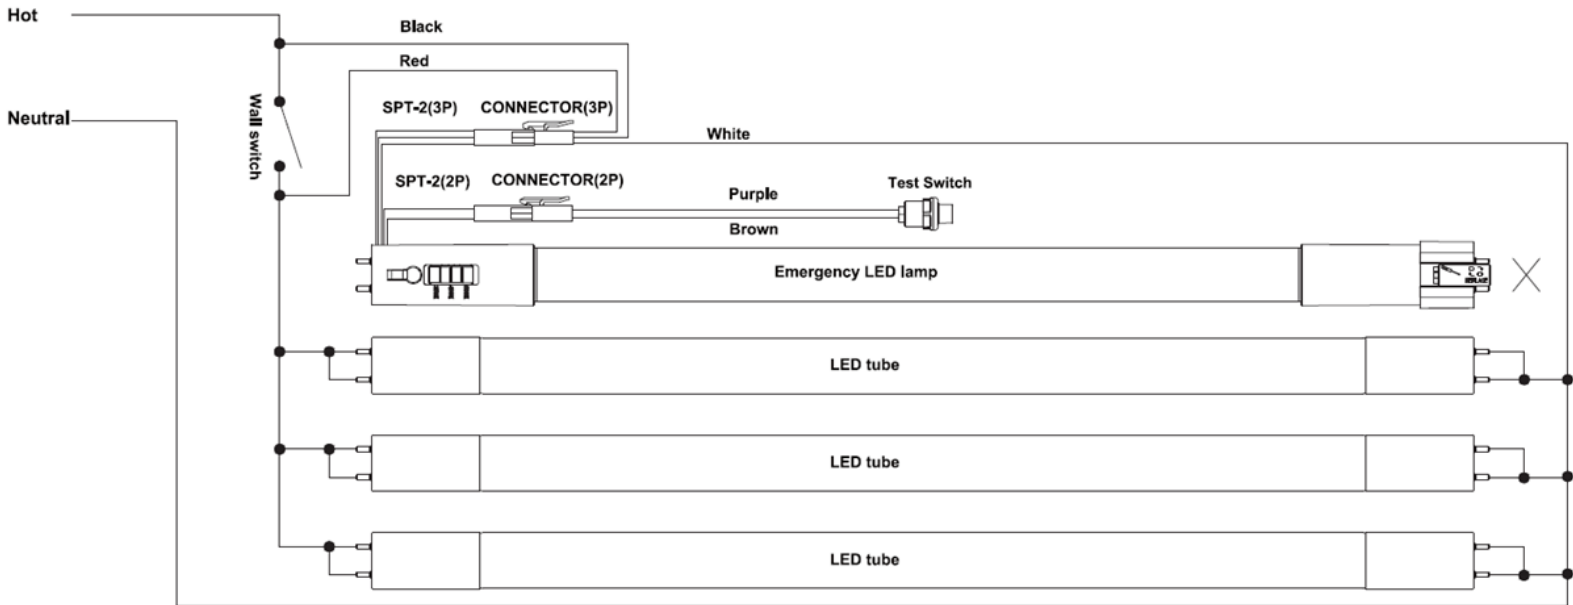

Easily access our DLC qualified products with rebates in your area.

ACCESS IT HERE: [Rebate Finder – Linear Tube](#)

[www.earthtronics.com/rebate-finder/catalog/](http://www.earthtronics.com/rebate-finder/catalog/)

