

Project	
Date	
Prepared By	
Model #	HBLWS185CCTWH5

Specifications

ELECTRICAL

Watts: 135, 155, 185
 Voltage: 120-347VAC
 Power Factor: >0.9
 THD: ≤10%

Operating Temp. Range:
 -20°C (-4°F) to 50°C (122°F)

LIGHT

Initial Lumens: 27750
 Lumens per Watt: 150
 Color Temperature:
 4000K, 5000K
 CRI: 80
 Dimming: 0-10V
 Dimmable: Yes

AGENCY APPROVALS

UL: Yes
 RoHS: Yes

PRODUCT DETAILS

Housing: Steel
 Lens: PMMA optical glare-control lens
 Warranty: 5 years
 Fixture
 Rated Life: 50,000 hours
 Lumen Maintenance: L70 at 100,000 hrs
 Weight: 5.5 LBS
 Dimensions:
 22.8"L x 10.2"W x 1.8"D



Norton Shores, Michigan 49441
 T: 231.332.1188 | F: 231.726.5029
 TOLL FREE: 866.632.7840
 www.earthtronics.com

Linear LED Highbay

Color & Wattage Selectable



ORDER CODE:

11859

MODEL NUMBER:

HBLWS185CCTWH5

LUMEN LEVELS:

27750 lumens - 185 watts
 23250 lumens - 155 watts
 20250 lumens - 135 watts

COMPATIBLE
 with EarthConnect®
 Network Lighting Controls



PRODUCT DESCRIPTION

EarthTronics LED Linear High Bay features two color selectable operations and wattage selectable options of 185, 155 or 135 watt. Switch between 4000K and 5000K easily at the time installation. EarthTronics LED High Bay offers a small, lightweight design that delivers excellent energy savings without sacrificing performance. This wattage selectable LED High Bay has a 1.9ft design and provides 20250 up to 27750 lumens. It also features a durable steel housing and with a high 80+ CRI providing excellent visual acuity for accuracy when working in manufacturing and warehousing applications. Optional sensors are audio jack screw in for easy installation.

PRODUCT FEATURES


- + Lightweight, compact design
- + 120-347VAC
- + Operating at 150 lumens per watt
- + 6kV ANSI surge protection standard
- + Integral LED lens is constructed from PMMA and provides even illumination
- + Durable steel housing
- + Up to 50°C true ambient temperature
- + Driver standard with 0-10V dimming (prewired)
- + Suitable for damp locations
- + Hanging hardware included V-Hooks & chain
- + Emergency back-up driver available
- + 6ft 18/3 SJT cord sold separately (see available options)

APPLICATIONS


- + Manufacturing Facility
- + Warehouse
- + Auditorium
- + Cafeteria
- + Gymnasium

Please consult installation instructions for proper application and use of this fixture.
 *Rebate availability access it here: www.earthtronics.com/rebate-finder

PRODUCT DIMENSIONS


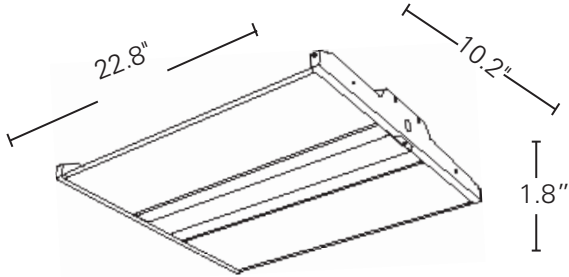


LIGHTING LAYOUT


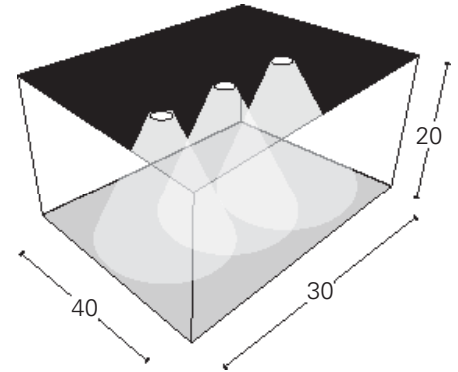


Average Illuminance: 30 fc
 Number of Luminaires: 3
 Workplane Height: 2.5 ft


OPTIONAL ACCESSORIES




Pendant Hanger
 Order Code: 1171



Surface Mount
 Order Code: 11710



Wire Guard
 Order Code:
 11713

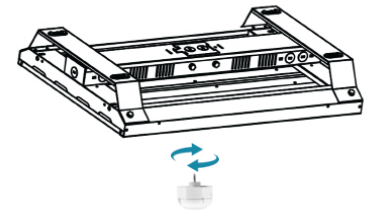


12VDC Microwave Sensor
 Order Code: 11795

Note: One remote control (11796) for multiple microwave sensors.



EarthConnect Option

Order Code: 11806
 Bluetooth Mesh Plug-In PIR sensor controller (Audio Jack) 12VDC, full function and daylight harvesting



External Emergency Back up Kit (30W)
 Order Code: 11617

6ft 18/3 SJT cord available (sold separately)

- Order Code: 11836 6ft 18/3 SJTOOW 300V Cord - White (cord only)
- Order Code: 11837 6ft Cord (18/3 SJT White) with 5-15P 120V 15AMP Plug Straight Blade Plug - Black
- Order Code: 11838 6ft Cord (18/3 SJT White) with NEMA L7-15P 277V 15AMP Twist Lock Plug - Black

Easily access our DLC qualified products with rebates in your area.

ACCESS IT HERE: [Rebate Finder - Linear LED Highbay](#)

www.earthtronics.com/rebate-finder/catalog/

