



# LED

MR16 GU5.3 Base

# Transformer / Dimmer Compatibility



Transformer Types

LED MR16 GU5.3 Base 500 Lumen

**LUTRON – DVELV-300P**

Number of bulbs per dimmer

Brand	Model	1	2	3	4	5	6
EUROfase	0086	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
	0089	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
TEMO LITE	TRA-50	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
REATOR	FORCE LINE	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
STANDARD	31017STD	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
MINI MAGG	B01742	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
	ET-MZ-60	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
CONSTRALITA	AC1048	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
B+L	FX95100	√	√	√	√	√	√



# LED

MR16 GU5.3 Base

# Transformer / Dimmer Compatibility



Transformer Types

LED MR16 GU5.3 Base 500 Lumen

**LUTRON – SELV-300P**

Number of bulbs per dimmer

Brand	Model	1	2	3	4	5	6
EUROfase	0086	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
	0089	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
TEMO LITE	TRA-50	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
REATOR	FORCE LINE	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
STANDARD	31017STD	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
MINI MAGG	B01742	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
	ET-MZ-60	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
CONSTRALITA	AC1048	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
B+L	FX95100	√	√	√	√	√	√



# LED

MR16 GU5.3 Base

# Transformer / Dimmer Compatibility



Transformer Types

LED MR16 GU5.3 Base 500 Lumen

**LUTRON – NELV-450**


Number of bulbs per dimmer

Brand	Model	1	2	3	4	5	6
EUROfase	0086	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
	0089	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
TEMO LITE	TRA-50	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
REATOR	FORCE LINE	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
STANDARD	31017STD	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
MINI MAGG	B01742	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
	ET-MZ-60	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
CONSTRALITA	AC1048	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
B+L	FX95100	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker

# LED

MR16 GU5.3 Base

## Transformer / Dimmer Compatibility

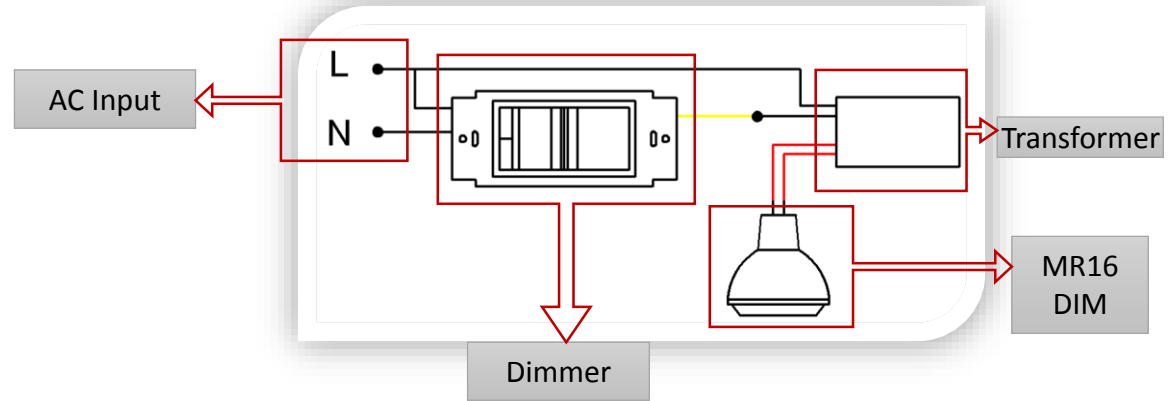


		LED MR16 GU5.3 Base 500 Lumen					
Transformer		Number of bulbs per dimmer					
Brand	Model	1	2	3	4	5	6
HATCH	RS12-60M	√	Flicker	√	√	√	√
	RS12-30M LED	√	√	Flicker	Flicker	Flicker	Flicker
	RS12-60M LED	√	√	√	Flicker	Flicker	Flicker
	RS12-80M	Flicker	√	√	√	√	√
	RS12-15M-LED(DC1318)	√	√	Flicker	Flicker	Flicker	Flicker
	RS12-15M-LED(DC1210)	√	√	√	√	√	Flicker
	RS1230M-LED	√	√	√	√	√	√

# LED

MR16 GU5.3 Base

# Transformer / Dimmer Compatibility

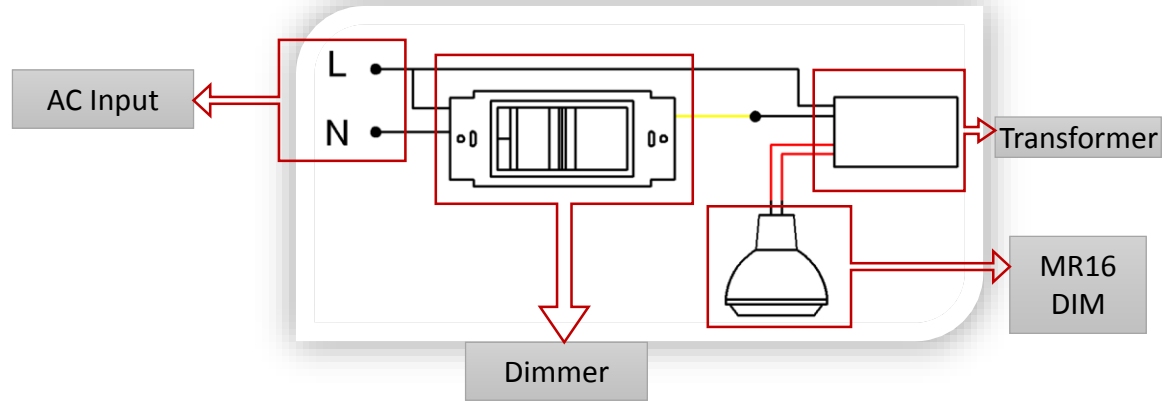


		LED MR16 GU5.3 Base 500 Lumen					
Transformer		Number of bulbs per dimmer					
Brand	Model	1	2	3	4	5	6
WAC	E-N-1260N-R2	√	√	√	√	√	√
	E-N-1260-R-AR	Flicker	Flicker	√	√	Flicker	Flicker
	E-N-1275-R-AR	√	√	√	√	√	√
DALI	ET8012iV	√	√	Flicker	√	√	√
	ET6012iV	√	√	√	√	Flicker	Flicker
	ET1502iV	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
	1060T	√	√	√	√	√	√
	ET8012LV	√	√	√	√	√	√



# LED

MR16 GU5.3 Base

# Transformer / Dimmer Compatibility

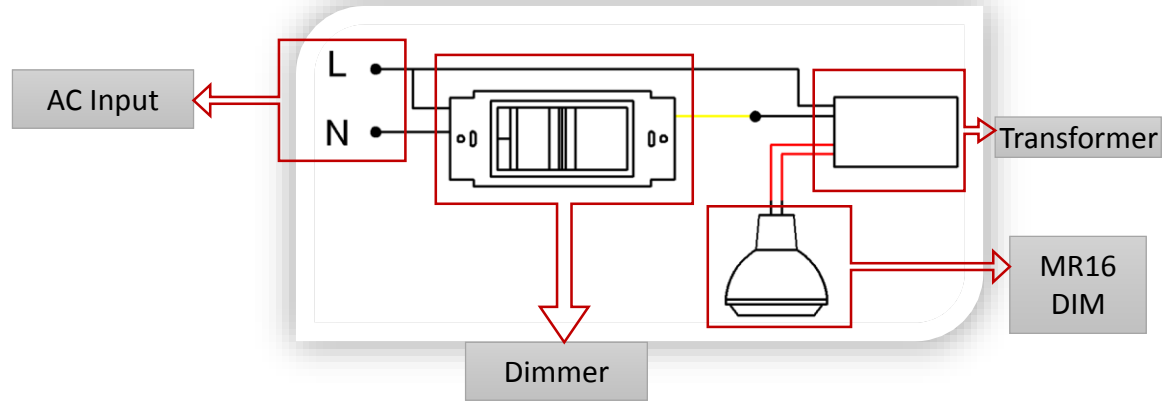


		LED MR16 GU5.3 Base 500 Lumen					
Transformer		Number of bulbs per dimmer					
Brand	Model	1	2	3	4	5	6
B+L	FX95100	√	√	Flicker	Flicker	Flicker	Flicker
CONSTRALITA	AC1048	√	√	√	√	Flicker	Flicker
EUROFASE	0086	√	Flicker	√	√	Flicker	√
	0089	√	Flicker	Flicker	√	Flicker	√
LIGHTECH	LET60LW	√	√	Flicker	Flicker	Flicker	Flicker
	E61883	√	√	√	√	√	√
MINI MAGG	MAGG	√	√	√	√	√	Flicker
PROGRESS	P8560-31	√	Flicker	√	√	√	√

# LED

MR16 GU5.3 Base

# Transformer / Dimmer Compatibility

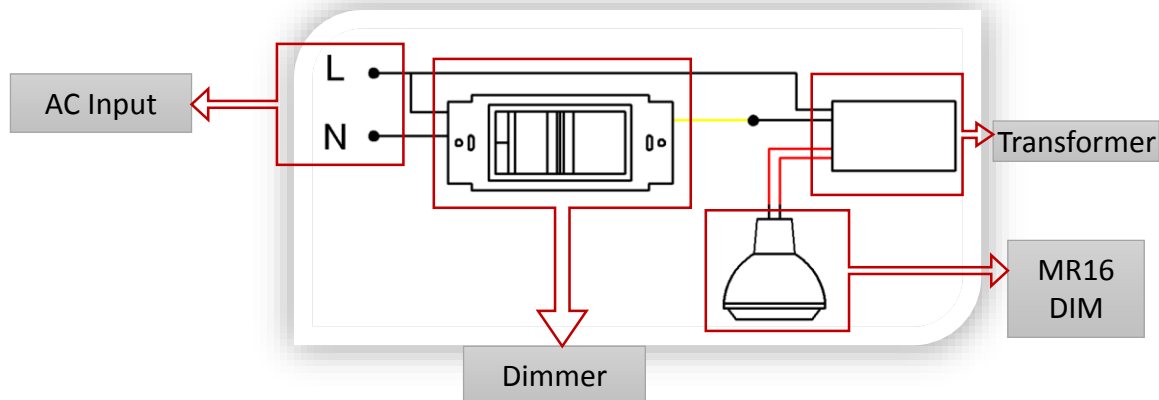

## LED MR16 GU5.3 Base 500 Lumen

### Transformer

### Number of bulbs per dimmer

Brand	Model	1	2	3	4	5	6
	ET-MZ-60	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
TDC	DA-50-12TH6-1	√	√	√	√	√	√
TEMO LITE	TRA-50	√	√	√	Flicker	Flicker	Flicker
REATOR	FORCE LINE	Flicker	Flicker	√	√	√	Flicker
STNDARD	31017STD	Flicker	Flicker	√	√	√	Flicker