

Document	Instructions
Rev. Date	11.22.2023
Order Code	11801
Model #	ECPIRLVE

Bluetooth® Mesh Sensor

With PIR & Daylight Harvesting




WARNING

Please consult a licensed electrician for installation. Turn off the power at circuit breaker before installing the unit.

FEATURES

- Drill a hole 1.30" (33.0 mm) in diameter through the sheet metal in the bottom of the fixture.
- Screw in the sensor into the receptacle and make sure the connection is tight, ensure the rubber gasket touches the outside surface of the fixture.
- Attach the lens to sensor and turn the lens module clockwise to ensure it locks in place.
- Please refer below diagram for Wiring.
- Commissioned the sensor via EarthConnect App.
- Return power back to source.

WIRING

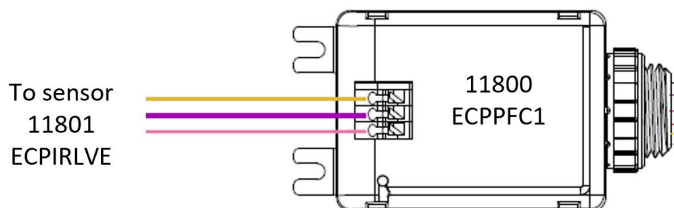

Download the EarthConnect App



Download the app instructions



LEARN MORE: [EarthConnect](https://www.earthtronics.com/earthconnect)

www.earthtronics.com/earthconnect