

| Project | |
|-------------|----------|
| Date | |
| Prepared By | |
| Model # | ECPIRLVE |

Specifications

Input Voltage: DC 12V

Sinking Current: 10mA Max

Input Power: 0.1W

PIR Output Voltage: DC 3.3V

Adjustable Sensitivity Input

Voltage: DC 0-3.3V

Housing Material: UL 94-5VA

Indoor Use Only

Detection Range: 50 ft

Mounting Height: 20 ft

Operating Temperature:

-30°C to 55°(-22°F to 131°F)

Storage Temperature:

-30°C to 85°(-22°F to 185°F)

IP Rating: IP20



Norton Shores, Michigan 49441 T: 231.332.1188 | F: 231.726.5029 TOLL FREE: 866.632.7840 www.earthtronics.com

Bluetooth® Mesh Sensor with PIR & Daylight Harvesting Powered by Fixture Controller 11800, ECPPFC1





ORDER CODE: 11801

MODEL NUMBER: ECPIRLVE

PRODUCT DESCRIPTION

EarthConnect, Bluetooth® networked lighting control system makes it easy for commercial facilities to maximize energy savings, improve comfort and achieve building code compliance for indoor and outdoor applications. This Bluetooth® Mesh sensor incorporates a PIR & daylight harvesting sensor. PIR occupancy sensor supports setting delay time and bi-level dimming of the sensors through EarthConnect APP. The daylight harvesting, this sensor allows for continuous dimming according to desired light level. It is powered by EarthConnect fixture controller (ordered separately).

PRODUCT FEATURES

- + Sensor provides daylight harvesting and PIR
- + This sensor is Bluetooth® Mesh
- + Indoor use only
- + Designed to operate with order code 11800 fixture controller, model number ECPPFC1
- + Ceiling mount adapter is available
- + Controlled via EarthConnect mobile app or keypad (purchased separately)

APP FEATURES

- + Wirelessly group luminaires to act in sync with each other.
- + Convenient commission via smartphone or wireless Bluetooth® wall switch, On/Off/ Dim.
- + Pre-set various color and brightness for individual or group of luminaires under different scene buttons, arouse all settings with one button.
- + Support setting delay time and dimming level for a group of sensors through
- + Search "EarthConnect" on the app store for iPhone (iOS 8.0 or later, and Bluetooth 4.0 or later), or google play store for Android (Android 4.3 or later, and Bluetooth 4.0 or later).










Please consult installation instructions for proper application and use of this product.



Bluetooth® Mesh Sensor with PIR & Daylight Harvesting






Physical Attachment

Communication Link


PRODUCT DIMENSIONS



Dimensions: 1.82" Height x 0.83" Diameter

Case Material: Plastic UPC: 840791118016

WIRING DIAGRAM

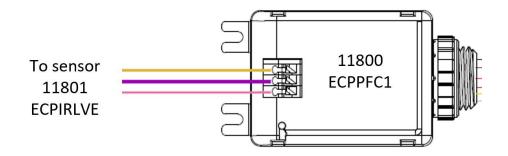

OPTIONAL ACCESSORIES



Ceiling Mount Adapter for Sensor Order Code: 11802



Dimmer Switch/ Key Pad & 5 button Bluetooth Wall Switch Order Code: 11808

LEARN MORE: EarthConnect

www.earthtronics.com/earthconnect











