

Project	
Date	
Prepared By	
Model#	LTF2X4WSCCTSD5

Specifications

ELECTRICAL

Watts: 26W/35W/44W
 Voltage: 120-347V
 Power Factor: 0.9
 Operating Temp. Range:
 -20°C - 45°C

LIGHT

Initial Lumens: 3300LM/
 4400LM/ 5500LM
 Lumens per Watt: 125
 Color Temperature:
 3500K, 4000K, 5000K
 Ra: >80
 Dimming: 0-10V Dimming
 Beam Angle: 120°

AGENCY APPROVALS


DLC® : Premium
 UL1598: Yes
 UL8750: Yes
 FCC: Yes

PRODUCT DETAILS

Finish: White
 Diffuser: PMMA
 Trim: Alumium
 Housing: SPCC
 Warranty: 5 Years
 Fixture Rated Life:
 108,000 hours at L70

LED 2x4 Troffer

Color & Wattage Selectable

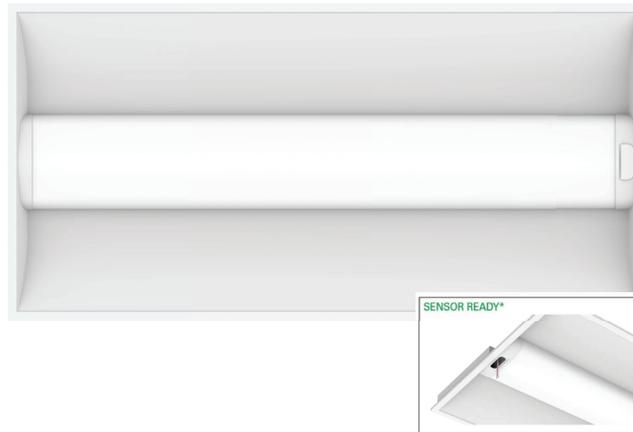

ORDER CODE: 11970
MODEL NUMBER:
 LTF2X4WSCCTSD5
WATTS: 26W/35W/44W
COLOR TEMPERATURE:
 3500K, 4000K, 5000K
LUMENS: 3000LM/4400LM/
 5500LM
DLC® PREMIUM:
 AMBIENT LIGHTING: S-VR5NYN
 LOW BAY: S-GVLDDR

PRODUCT DESCRIPTION

The 2x4 Troffer Center Basket LED fixture is a high-performance, energy-efficient lighting solution designed for commercial and office environments. Featuring DLC Premium certification, it offers selectable wattage options (44W, 35W, 26W) with lumen outputs up to 5500 lumens at 125 lm/W, ensuring versatility and efficiency. Its 0-10V dimming with dim-to-off functionality allows seamless integration into lighting control systems, while the durable aluminum housing and PMMA diffuser provide uniform illumination. Designed for damp locations, this fixture is ideal for offices, schools, and retail spaces, boasting a high CRI (>80) for accurate color rendering. With a long lifespan of 108,000 hours at L70, a 5-year warranty, and compliance with UL1598, UL8750, DLC 5.1, and FCC Part 15B standards, it ensures reliability and reduced maintenance costs. Optional sensor modules further enhance control and energy savings, making it a smart choice for any commercial lighting upgrade.

PRODUCT FEATURES


- + Color selectable: 3500K, 4000K, 5000K
- + Wattage selectable: 26, 35, 44
- + Standard 120-347V
- + 0-10V continuous dimming driver
- + Dimming range of 10% to 100%
- + DLC® Premium

APPLICATION


- + Office
- + Healthcare Facilities
- + Education

Please consult installation instructions for proper application and use of this fixture.

PRODUCT DIMENSIONS

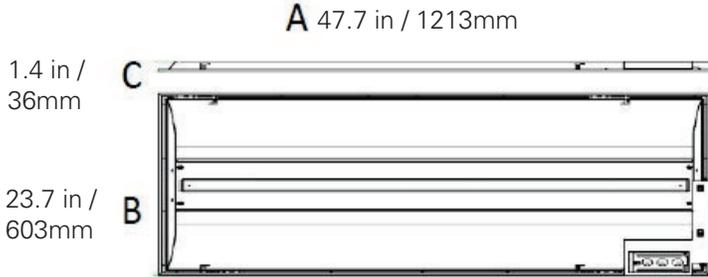

SENSOR PORT DIMENSIONS

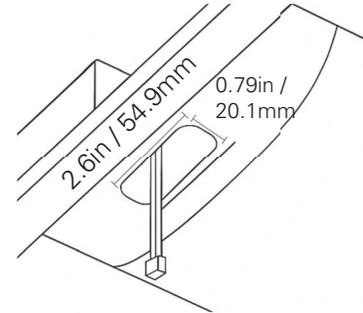

PACKAGE DETAILS INDIVIDUAL PACKAGE

Individual Carton Qty: 1
 Dimensions: 47.7in x 1.4in x 23.7in
 Weight: 7.4 lbs
 UPC: 840791119709

OPTIONAL ACCESSORIES



Emergency Back-up
 Driver for select Troffers
 Order Code: 11469



2x4 Mud In Frame
 for Troffer
 Order Code: 11102



Troffer PIR Motion Sensor
 12VDC
 Order Code: 11973



ADVANCED LIGHTING CONTROLS



Bluetooth® PIR 12VDC
 Troffer Sensor
 Order Code: 11974



Intertek