


# LED BR30

## 8 Watt 670 Lumen 2700K BR30 LED



### PRODUCT DESCRIPTION

8 watt BR30 EarthBulb LED floodlight replaces 65 watt incandescent floodlights for over 80% energy savings. Great for use in dimming recessed lighting, track lighting and display lighting applications. Multi-Chipset high power LED and an advanced cooling system provides for 25,000 hours of LED life. Medium screw base. Energy Star rated product.

### PRODUCT FEATURES

- Dimming BR30 flood light is provides 670 lumens, capable of dimming to less than 10%
- Damp location rated
- Full 110° beam angle provides full radial illumination
- Chipset provides 2700K soft white light with a high color rendering rating of over 80

### PRODUCT APPLICATIONS




### CONE OF LIGHT

Lumens: 670

Distance ft	Foot Candles fc	Diameter ft
2	57.07	6.45
4	14.27	12.91
6	6.34	19.36
8	3.56	25.82
10	2.28	32.27




### LUMINOUS DISTRIBUTION INTENSITY DIAGRAM

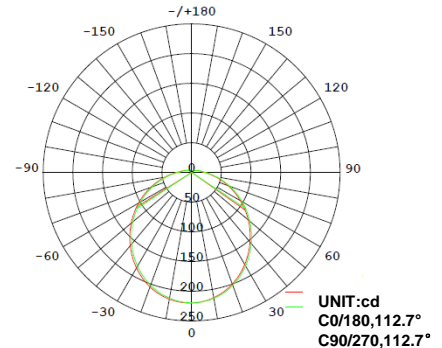

### AVERAGE BEAM ANGLE (50%): 112.7°

Note: IES files available upon request.



### MODEL NUMBER: LBR3827DLL

Order Code	Individual UPC	Master Park UPC	Qty
11397	840791113974	84079111397400	12
Dimensions (inches)			
11397	3.74 x 3.74 x 5.39	15.83 x 11.97 x 6.42	12
Weight (lbs)			
11397	0.682	3.60	12



Electrical	
Watt	8
Input Current	143 (mA)
Power Factor	0.8
Voltage	120 volt
Frequency	60hz
Min. Start Temp	-4F
Max. Operating Temp	104F
Base Type	E26 Medium
Light	
Initial Lumens	670
Lumens per Watt	83.75
Color Temperature	2700K
Color Rendering (CRI)	82
Beam Angle	110°
Agency Approvals	
UL	Yes
Energy Star	25,000 hr rated
RoHS	Yes
FCC	Yes
Product Details	
Warranty	5 years
Mercury Content	0
Diameter	3.75"
Overall Length	5.20"

