

Project	
Date	
Prepared By	
Model #	LSLIM4CCTWH2T

LED 4" Slim Downlight

650 Lumens, 9 Watt, Color Selectable

Specifications

ELECTRICAL

Watts: 9
 Voltage: 120VAC
 Power Factor: 0.97
 Operating Temp. Range:
 -40°F to 135°F

LIGHT

Initial Lumens: 650
 Lumens per Watt: 70.8

Color Temperature:
 2700K, 3000K, 3500K,
 4000K and 5000K


CRI: 81
 Dimmable: Yes

AGENCY APPROVALS

ETL: Yes
 FCC: Yes
 IC Rated: Yes
 Energy Star: Yes

PRODUCT DETAILS

Lens: Acrylic
 Warranty: 5 years
 Fixture
 Rated Life: 50,000 hours
 Weight: 1.18 LBS
 Dimensions:
 4.72" Diameter



ORDER CODE:

11696

MODEL NUMBER:

LSLIM4CCTWH2T

ENERGY STAR PRODUCT ID:

2404695

REBATE AVAILABILITY*

PRODUCT DESCRIPTION

4" Slim IC-Rated LED Downlight features five color selectable operation. Switch between 2700K, 3000K, 3500K, 4000K and 5000K easily at the time installation. These slim fixtures can be easily installed in finished drywall or architectural tile ceilings in both commercial and residential applications where space is an issue. They can also be used to retrofit existing recessed downlight fixtures. This fixture provides 71 lumens per watt with a high 80+ CRI for improved visual acuity and efficient performance. It features smooth dimming down to ten percent on typical incandescent dimmer controls. It is IC-rated for use in insulated ceilings and meets IECC air leakage requirements to provide a versatile and attractive downlight product. UL Wet Location listed for use in high humidity areas and bathroom showers. These fixtures are designed for easy installation. For use on 120VAC power supplies. Energy Star certified.

PRODUCT FEATURES

- + 5 color light selection assures you of the proper light color for every installation
- + Driver is Class 2, FT-6 rated cord
- + IC-Rated & ICC Air Lock
- + Conforms to UL Std.1598, certified to CSA Standard C22.2 No. 250.0
- + 50,000 hour rated life
- + Edge-Lit LED technology provides even illumination
- + IC Rated
- + Wet Location
- + Energy Star certified

APPLICATIONS

- + Hotel Rooms
- + Schools
- + Long-term care facilities
- + Hospitals
- + Commercial
- + Bathrooms
- + Office Buildings
- + Residential

Please consult installation instructions for proper application and use of this fixture.
 *Rebate availability access it here: www.earthtronics.com/rebate-finder



DAYLIGHT	5000K
COOL WHITE	4000K
BRIGHT WHITE	3500K
WHITE	3000K
SOFT WHITE	2700K

PACKAGE DETAILS





INDIVIDUAL PACKAGE

Individual Carton Qty: 1
 Dimensions:
 5.59" Length x 3.15" Width x 5.71" Height
 Weight: 0.95 LBS
 UPC: 840791116968

MASTER CARTON

Master Carton Qty: 6
 Dimensions:
 9.45" Length x 11.77" Width x 6.30" Height
 Weight: 21.30 LBS
 UPC: 84079111696800

INSTALLATION

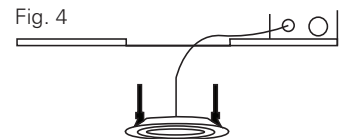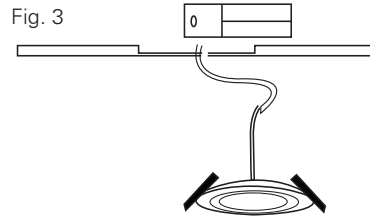

Easily access our Energy Star listed products with rebates in your area.

ACCESS IT HERE: [Rebate Finder LED Slim Downlight](#)

www.earthtronics.com/rebate-finder/catalog/

