

Project	
Date	
Prepared By	
Model #	HL60CCTEX39

Specifications

ELECTRICAL

Watts: 42, 60

Voltage: 120-277VAC Power Factor: >0.90 BaseType: EX39

Operating Temp. Range:

-40°F to 113°F

LIGHT

Initial Lumens: 6300, 9000 Lumens per Watt: 150 ColorTemperature: 4000K, 5000K

CRI: >80

Beam Angle: 360°

AGENCY APPROVALS

DLC®: Yes UL/RoHS: Yes

FCC: Yes IP64: Yes

PRODUCT DETAILS

Warranty: 5 years

Fixture

Rated Life: 50,000 hours

Dimensions: 3.46"D x 9.72"M



Norton Shores, Michigan 49441 T: 231.332.1188 | F: 231.726.5029 TOLL FREE: 866.632.7840 www.earthtronics.com

LED High Lumen

Wattage & Color Selectable





Wattage Select Switch



Color Select Switch

ORDER CODE:

11507

MODEL NUMBER:

HL60CCTEX39

COLOR SELECTABLE:

4000K or 5000K

LUMEN LEVEL:

6300 lumens - 42 watts 9000 lumens - 60 watts

BASETYPE:

EX39

DLC® PRODUCT ID:

PFMACTH0

REBATE AVAILABILITY*

PRODUCT DESCRIPTION

This EarthTronics high lumen H.I.D replacement provides the flexibility to ensure the correct light level desired in different applications. Select from 4000K or 5000K as well as 42 watt or 60 watt levels at the time of installation with just a switch. This 6,300 - 9,000 lumen LED equals up to 400 watt H.I.D lamp replacement on a Mogul EX39 base type. A thermal sensor in the lamp activates during high heat conditions. Power to the corn cob LED is automatically reduced by up to 20% to cool the product and maintain lamp life. This high lumen H.I.D replacement is ideal for retrofit opportunities in exterior wall packs, yard lights, post lights, parking lot shoe box fixtures and other site and security applications. Simply bypass the existing ballast connect the 120-277V line voltage directly to the sockets. No ballast or external driver is required. These vertical corn cob LED lamps feature a 360° beam angle to produce full radial illumination. DLC® listed product.

PRODUCT FEATURES

- + Ideal replacement for conventional metal halide lamps
- + DLC® technical requirement 5.1
- + Utilizes high quality Samsung LED chips
- + Cooling technology activates during high heat conditions
- + 360° beam angle
- + Damp rated IP64
- + Suitable for use in enclosed fixtures
- + Operates on 120-277 volt systems
- + 50,000 hour rated life

APPLICATIONS

+ Security

- + Stairways

+ Barns

- + Storage Areas
- + Bathrooms

+ Basements


*Includes safety cable that must be installed.



LED High Lumen

Wattage & Color Selectable

PRODUCT DIMENSIONS



BASE TYPE



EX39 Base

PACKAGE DETAILS

INDIVIDUAL PACKAGE

Individual Carton Qty: 1

Dimensions:

3.74" Length x 3.74" Width x 11.14" Height

Weight: 2.09 LBS UPC: 840791115077

MASTER CARTON


Master Carton Oty: 12

Dimensions:

15.75" Length x 12.01" Width x 11.93" Height

Weight: 27.56 LBS UPC: 84079111507700

OPTIONAL ACCESSORIES

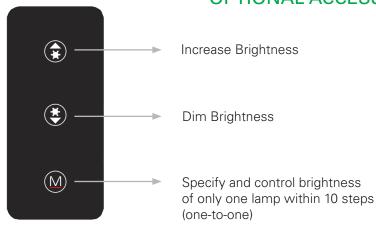

Dimming Remote Control

Order Code: 11613

Easily access our DLC qualified products with rebates in your area.

ACCESS IT HERE: Rebate Finder - HID

www.earthtronics.com/rebate-finder/catalog/





