

调色温 调功率 直下式面板灯说明书

规格: 210*285

材质: 80克书纸 单黑双面印刷

品号: N8E-01951A00-000



LED Back-lit Panel Light

INSTRUCTION MANUAL

PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.
! Electrical products can cause death or injury, or damage to property. If in any doubt about the installation or use of this product, consult a competent electrician


| Product Model | Power | Working Current | Input Voltage | Luminous Efficacy | CCT | Viewing Angle | Ra | Dimmable | Warranty |
|-----------------|-------------|-----------------|---------------|-------------------|---------------------------|---------------|-----|----------|----------|
| LDFP2X4WSCCTTS5 | 30W/40W/50W | 0.458A | 120-347VAC | 125lm/W | 3500K/ 4000K/ 5000K | 120° | ≥80 | 0-10V | 5 years |
| LDFP1X4WSCCTD5 | 20W/30W/40W | 0.367A | | | | | | | |

Warning


- * LED Panels are not suitable for using in wet loations
- * Please keep the LED Panel away from any corrosive substance, and please use dry cloth when you clean it
- * LED Panel can only be installed by a qualified electrician.
- * Before installation or maintenance, please disconnect the power to prevent electric shock.



Recessed Installation

1. Replace existing lighting fixture from ceiling with LED Panel.

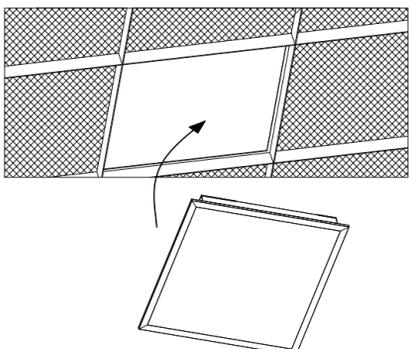


2. Use the protective brackets for the sake of safety.




Alternative 1:  Alternative 2:  steel rope (for fixing onto roof)
Put thin steel rope through hole of the bracket and fix it onto the brackets.

Installation Guide


1. Unscrew the driver cover.




2. Connect the conduit to the driver box.

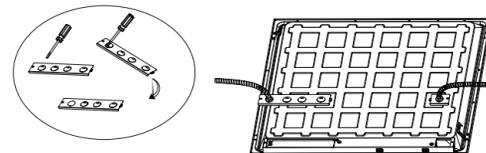

3. Connect other wires separately.

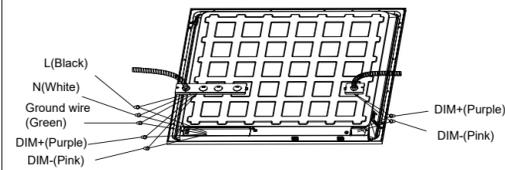


4. Put back the driver cover and fix it by screw. Select adjustable power and color temperature.

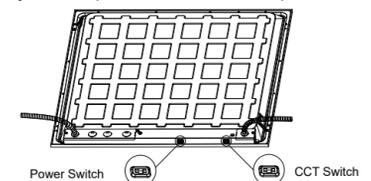


Suspension Kit Installation


1. Drill two holes in the ceiling, and put the anchors into hole, then insert the wire rope and screw.



2. Adjusting the hanging rope making the panel in a horizontal state.



3. The installation is finished.



Note: 2*2/1*4/2*4ft: 2 pcs suspension kits needed for installation.

The Installation must be carried out by a qualified electrician.